

ZOOMABLE DOWN LYTE

Our zoomable downlight is excellent for retail applications because the fixture can tilt and zoom to meet the needs of changing store layouts. Up to 3 individual heads can be directed separately with beam angles of 15-90°.

- Available Wattages: 15W Circular, 15W Square, 30W Double-Head, 45W Triple-Head
- Available Color Temperature: 2700K, 3000K, 4000K, 5000K
- Available Beam Angles: 15°-90°
- Available CRI: 90+
- Input Voltage: 120V / 220-240V / 277V / AC, 50-60Hz
- Dimming Options: Triac, 1-10V, DALI
- Available Housing Colors: White, Black, Silver

APPLICATIONS:

- Commercial
- Entertainment
- Healthcare
- Hospitality
- Museums
- Public Spaces
- Residential
- Retail



ACCENT
LIGHTING


CERTIFICATIONS:



IP RATINGS:



AVAILABLE COLOR TEMPERATURES

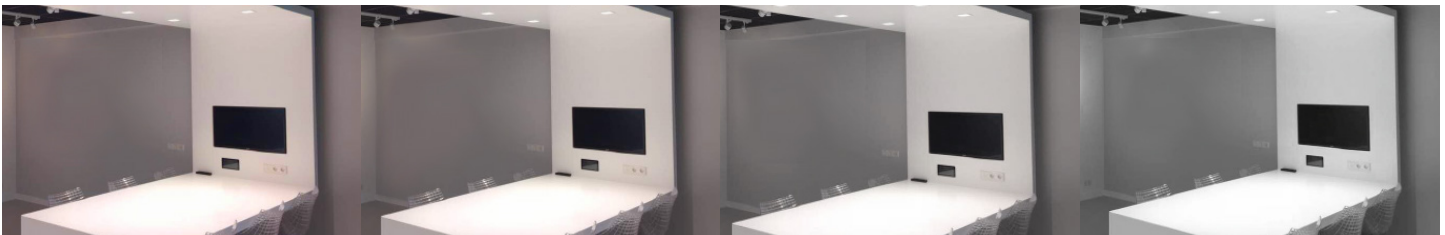

2700K
Incandescent White

3000K
Warm White

4000K
Cool White

5000K
Bright White

ZOOMABLE DOWN LYTE SPECIFICATIONS / METRICS

SPECIFICATIONS	15 CIRCULAR	15W SQUARE	30W DOUBLE-HEAD	45W TRIPLE-HEAD
Lumen_2700K	1155 lm	1155 lm	2310 lm	3465 lm
Lumen_3000K	1260 lm	1260 lm	2520 lm	3780 lm
Lumen_4000K	1317 lm	1317 lm	2634 lm	3951 lm
Lumen_5000K	1358 lm	1358 lm	2716 lm	4074 lm
Lumens/Watt 2700K	77 lm/W	77 lm/W	77 lm/W	77 lm/W
Lumens/Watt 3000K	84 lm/W	84 lm/W	84 lm/W	84 lm/W
Lumens/Watt 4000K	88 lm/W	88 lm/W	88 lm/W	88 lm/W
Lumens/Watt 5000K	90 lm/W	90 lm/W	90 lm/W	90 lm/W
Beam Angle	15°-90°			
Input Voltage	120V / 220-240V / 277V AC, 50-60Hz			
Protection Rating	IP20			
Color Temperatures	2700K, 3000K, 4000K, 5000K			
CRI	CRI > 90+			
Dimming Options	Triac, 1-10V, DALI			
Certificate	CE, RoHS			
Working Temperature	-20°C - +45°C			
Housing Color	White, Black, Silver			
Fixture Length	5.7" (145 mm)	6.2" (158 mm)	11.5" (293 mm)	14.8" (428 mm)

DIMENSIONS	15 CIRCULAR	15W SQUARE	30W DOUBLE-HEAD	45W TRIPLE-HEAD
Length	5.7" (145 mm)	6.2" (158 mm)	11.5" (293 mm)	14.8" (428 mm)
Width	4.9" (125 mm)	6.2" (158 mm)	6.2" (158 mm)	6.2" (158 mm)
Cut Hole Dimensions	ø4.52-4.92" (ø115-125 mm)	ø4.72-5.31" (ø120-135 mm)	9.84" L x 5.11" W (250 L x 130 W mm)	14.96" L x 5.11" W (380 L x 130 W mm)


	3000K - NARROW	3000K - WIDE
DOWN LYTE 15W-2	4,815.17 1m 0.2m	1,103.65 1m 1.4m
	1,203.79 2m 0.5m	275.91 2m 2.7m
	535.02 3m 0.7m	122.63 3m 4.1m
	300.95 4m 1.0m	68.98 4m 5.4m
	Lux chart distance diameter	Lux chart distance diameter
DOWN LYTE 15W-1	4,815.17 1m 0.2m	1,103.65 1m 1.4m
	1,203.79 2m 0.5m	275.91 2m 2.7m
	535.02 3m 0.7m	122.63 3m 4.1m
	300.95 4m 1.0m	68.98 4m 5.4m
	Lux chart distance diameter	Lux chart distance diameter




ZOOMABLE DOWN LYTE DIMENSIONS

ZOOMABLE DOWN LYTE MODELS


15W CIRCULAR

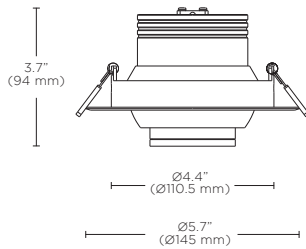


15W SQUARE

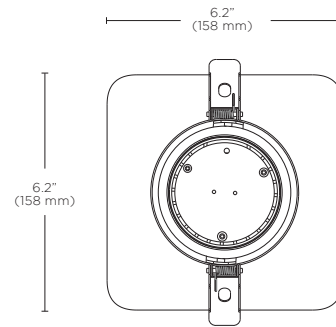


30 DOUBLE-HEAD

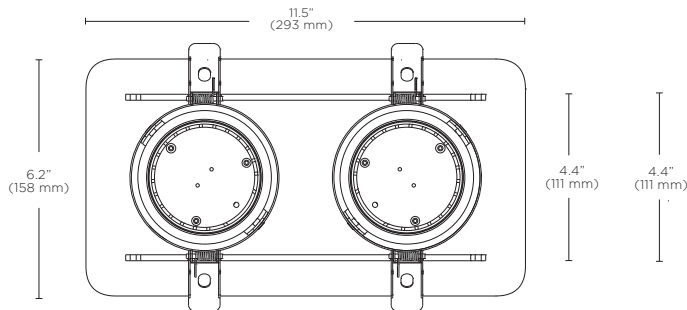

45W TRIPLE-HEAD

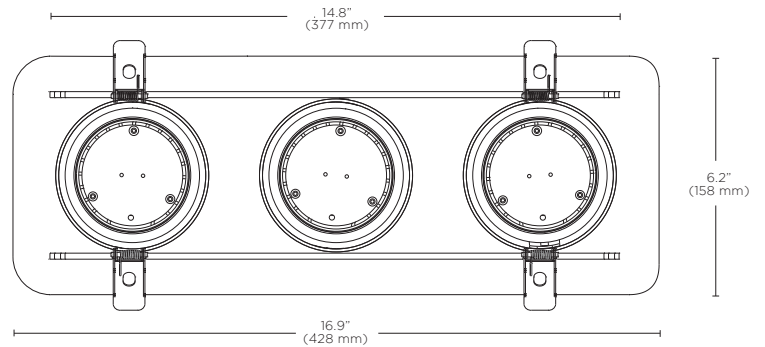

ZOOMABLE DOWN LYTE PART NUMBER BUILDER



1 - Category

DL - Zoomable Down Lyte

2 - CRI

HI - HI-CRI

3 - IP Rating

20 - IP20

4 - Voltage

120 - 120 Volts

220 - 220-240 Volts

277 - 277 Volts

5 - Wattage

15-1 - 15 W Circular

15-2 - 15 W Square

30 - 30 W Double-Head

45 - 45 W Triple-Head

6 - Color Temperature

27 - 2700K

30 - 3000K

40 - 4000K

50 - 5000K

7 - Dimming

TRI - Triac dimmable

DA - DALI dimmable (dimming on fixture)

110 - 1-10V dimmable

8 - Zoomable

ZOOM - Zoomable

9 - Housing Color

K - Black

W - White

S - Silver