
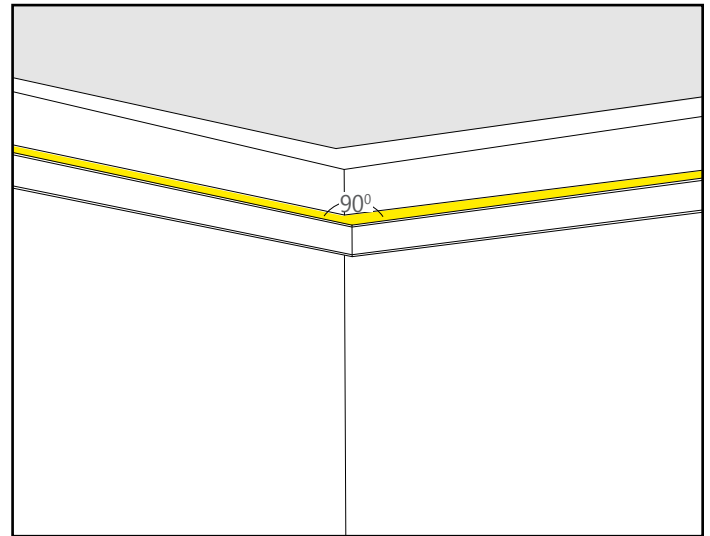


Project \_\_\_\_\_

Type \_\_\_\_\_

Notes \_\_\_\_\_

**IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**

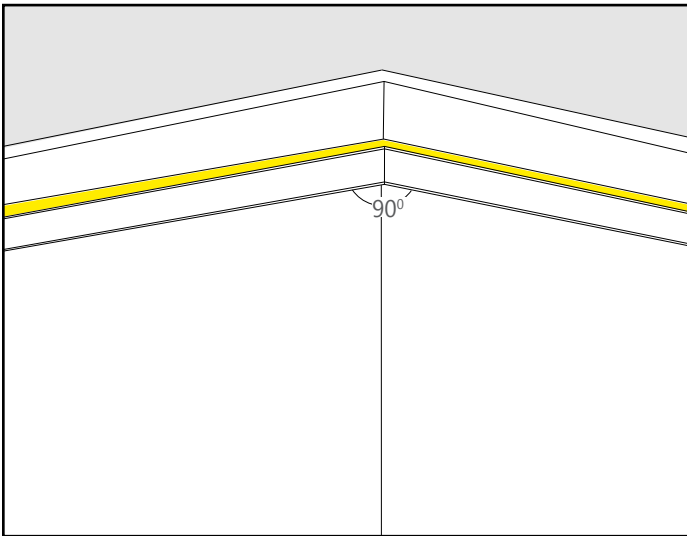

BBWLEDPAT	OPO	90	16'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

3D VIEW - Outside Corner Pattern

BBWLEDPAT	OPI	90	16'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

3D VIEW - Inside Corner Pattern

PRODUCT ID	PATTERNS	CORNER DEGREES	LUMENS/FT	CRI
<b>BWLEDPAT</b> beam2led wall	<b>OPO</b> open shape outside lit corner	<b>90</b> 90 degrees	<b>400</b> 400 lm/ft	<b>80</b> 80 CRI
<b>BMWLEDPAT</b> beam3led wall	<b>OPI</b> open shape inside lit corner	<b>#</b> other degree	<b>500</b> 500 lm/ft	<b>90</b> 90 CRI
<b>BBWLEDPAT</b> beam4led wall	<b>OPOI</b> open shape outside/inside lit corner		<b>750</b> 750 lm/ft	
<b>B6WLEDPAT</b> beam6led wall			<b>1000</b> 1000 lm/ft	
			Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.	

COLOUR TEMP.	SHIELDING	LENGTH/FT	SPECIFY LENGTH	FINISH	VOLTAGE	DRIVER
<b>27</b> 2700 K	<b>SO</b> spotless lens	<b>#</b> total pattern length	<b>NL</b> nominal	<b>AP</b> aluminum paint	<b>120</b> 120V	<b>DP</b> dimming (0-10V) 1%
<b>35</b> 3500 K			<b>EX</b> exact	<b>W</b> white	<b>277</b> 277V	<b>D</b> dimming (0-10V) 5% 347V standard <sup>(2)</sup>
<b>30</b> 3000 K				<b>BLK</b> black	<b>347</b> 347V <sup>(1)</sup>	<b>LT</b> Lutron <sup>(3)</sup>
<b>40</b> 4000 K				<b>C</b> custom	<b>UNV</b> universal	<b>BI</b> bi-level dimming
					(1) D dimming (0-10V) 5% standard	<b>O</b> other <sup>(4)</sup>
						(2) For 347V only (3) Specify system (4) Please consult factory; see page 2

CIRCUITS	BATTERY	OTHER	IC CONTROLS (OPTIONAL)	CUSTOM (OPTIONAL)
<b>1</b> 1 circuit	<b>B#</b> battery pack	<b>F</b> fuse <sup>(6)</sup>	<b>DS#</b> daylight sensor	<b>C</b> custom
<b>2</b> 2 circuits	4' sections	<b>D</b> dust cover	<b>OS#</b> occupancy sensor	
<b>+E(#)</b> emergency circuit <sup>(5)</sup>			<b>DOS#</b> daylight & occupancy sensor	
<b>+NL(#)</b> night light circuit <sup>(5)</sup>			<b>EN#</b> Enlighted integral <sup>(7)</sup>	
<b>+GTD(#)</b> generator transfer device <sup>(5)</sup>			<b>ENR#</b> Enlighted remote <sup>(7)</sup>	
(5) Specify quantity	Requires 120V or 277V Please consult factory	(6) Requires 120V or 277V	(7) Please consult factory	Please specify

## ● LIT CORNER FEATURES

The Lit Corner system allows continuous illumination all the way through the corner section


To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.

**Inside Illuminated Corner.** A fully lit corner on the inside planes.

**Outside Illuminated Corner** - A fully lit corner on the outside planes.

**TIP:** Provide sketches illustrating corner types and locations required.

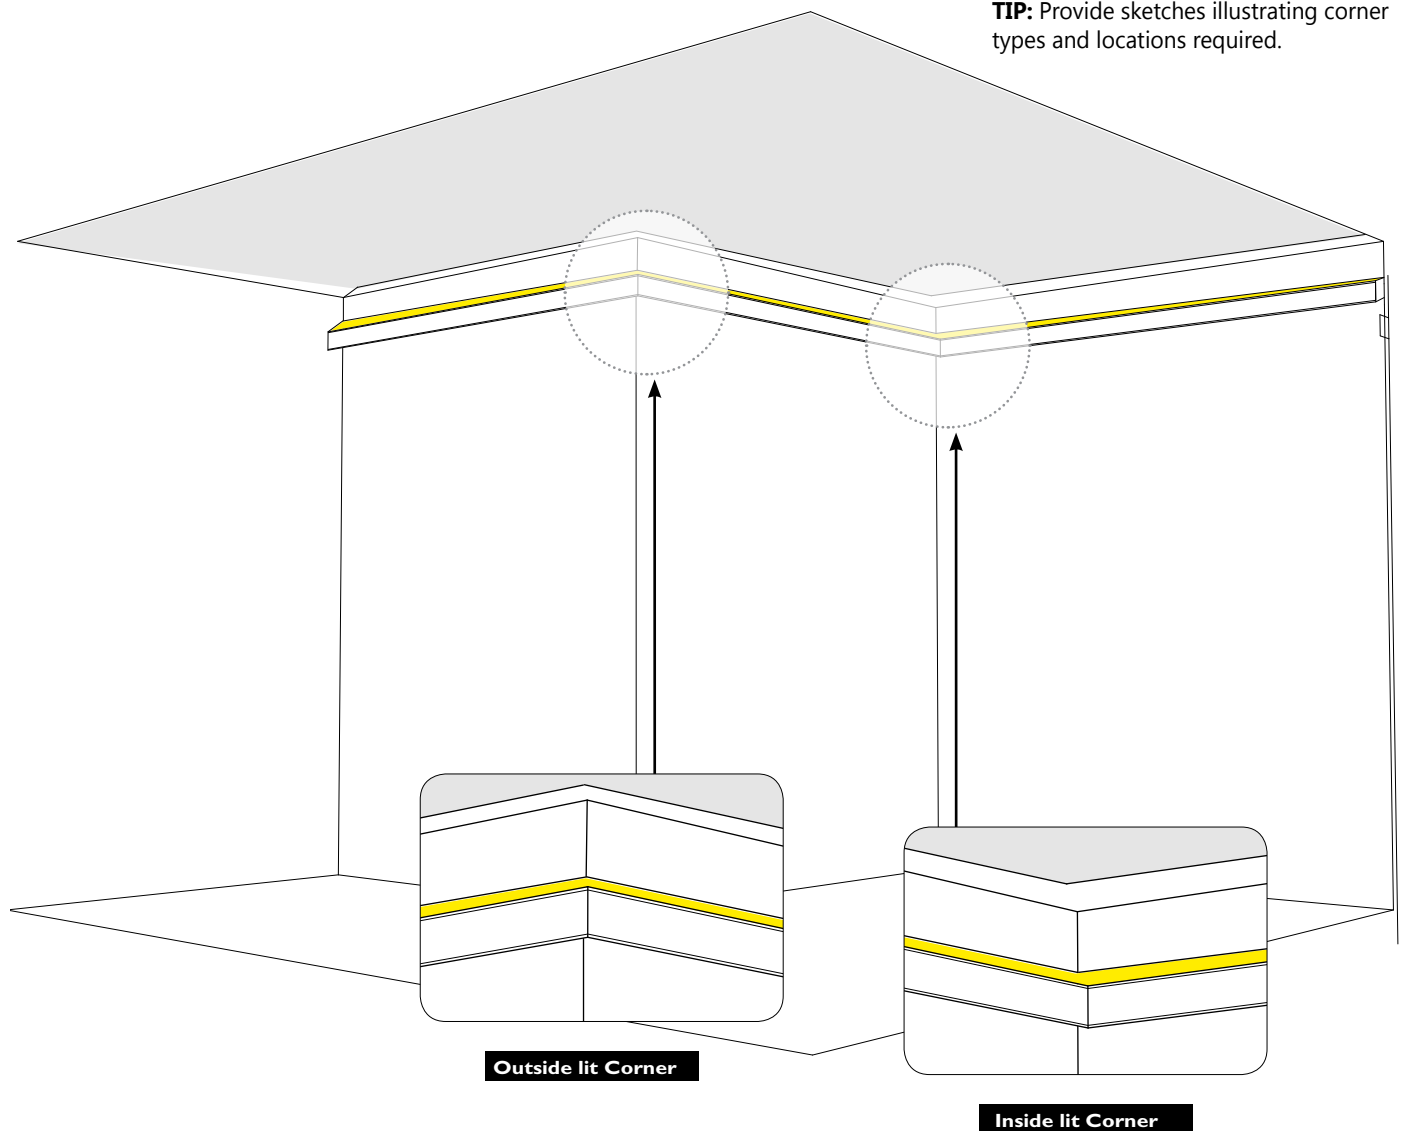

**IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**

