


BOUQUET 4428-10-UAC

PROJECT PROJET
SPEC TYPE
NOTES

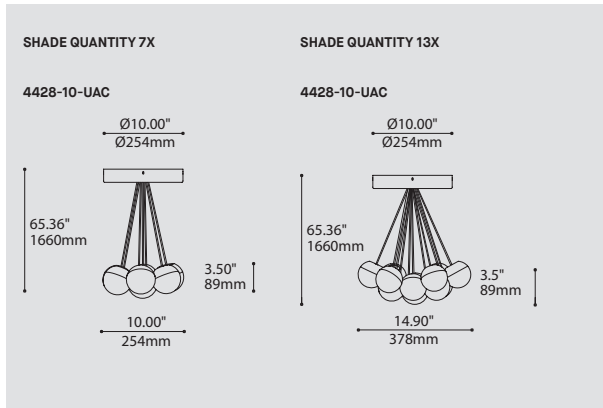


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		4428-10-UAC
4428-10-UAC	BOUQUET MEHA	
SHADE QUANTITY QUANTITÉ D'ABAT-JOUR		
7 OR 13 SHADES		
7	7 X SHADES	
13	13 X SHADES	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
LED.1	1W, LED	
LED.4	4W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
FOR LED ONLY		
30	3000K	
35	3500K	
40	4000K	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
FOR LED ONLY		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
CABLE CABLE		C
C	CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
STRUCTURE FINISH FINI STRUCTURE		WHE
WHE*	WHITE FINE TEXTURE	
*CENTRAL PIECE IS ALWAYS BLACK		
DIFFUSER FINISH FINI DIFFUSEUR		
CLR	CLEAR	
FRO	FROSTED	
HEATSINK FINISH FINI RADIATEUR		SAA
SAA	SATIN ALUMINUM ANODIZED	
ACCESSORY ACCESSOIRE		
4901	HOOK	
4902	LOOP	


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES** **LED**

DESIGN:	Offered in a wide variety of configurations, Bouquet is a cluster of 7 or 13 fixtures all emerging from the matte black recessed center hole of a white canopy. Bouquet can be paired with the adjustable cable holder accessory, Loop (4902), which can be easily installed and removed.
INSTALLATION:	Bouquet mounts on standard junction boxes and is supplied with support hooks for easy installation.
LIGHT SOURCE:	Available with incandescent, halogen or LED light sources depending on the fixtures. Dimming available.
STRUCTURE:	Spun steel chrome plated canopy matte black center hole to hide mounting hardware.
CERTIFIED:	c-CSA-us
CONCEPTION:	Offert dans une grande variété de configurations, Bouquet est un groupe de 7 ou 13 luminaires émergeant du trou encastré au centre d'un pavillon blanc. Bouquet peut être jumelé avec l'accessoire serre-câble ajustable Loop (4902), qui peut être facilement installé ou retiré de l'assemblage.
INSTALLATION:	Des crochets de support sont fournis pour faciliter l'installation sur une boîte de jonction standard.
SOURCE LUMINEUSE:	Utilisation avec sources lumineuses DEL ou incandescentes avec des options de gradation.
STRUCTURE:	Pavillon en acier repoussé et chromé avec section centrale noire matte pour camoufler les supports.
CERTIFIÉ:	c-CSA-us

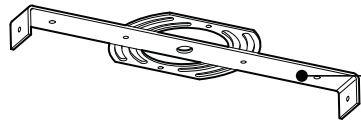


EASY INSTALLATION
Mounts to standard junction box with added mounting points to reinforce installation

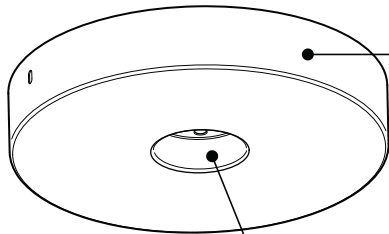


SIMPLE CANOPY
Chrome plated canopy with plenty of room to house all electrical components for quick assembly

CENTER PIECE
Matte black recessed center hole

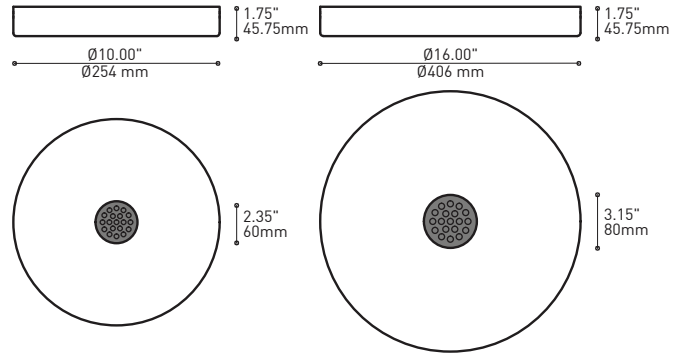


Wide variety of configurations





ACCESSORIES


Allows more creativity

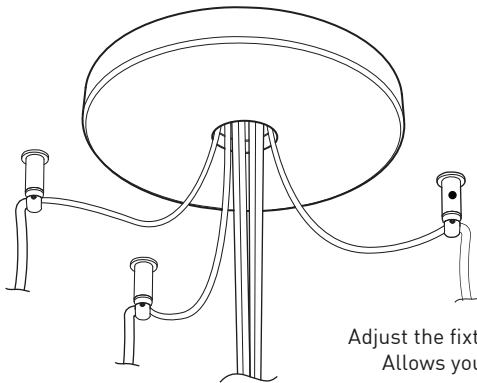


HOOK 4901
Adjust the fixture to the desired height
Allows you to make big statements

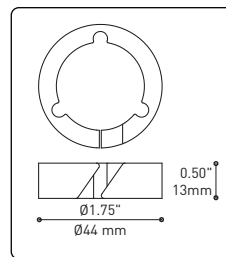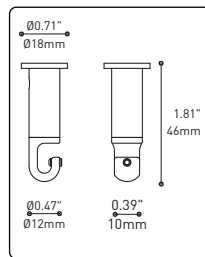

LOOP 4902
Can straighten, lock height or group up to 19 power cables
Can be installed after fixture installation

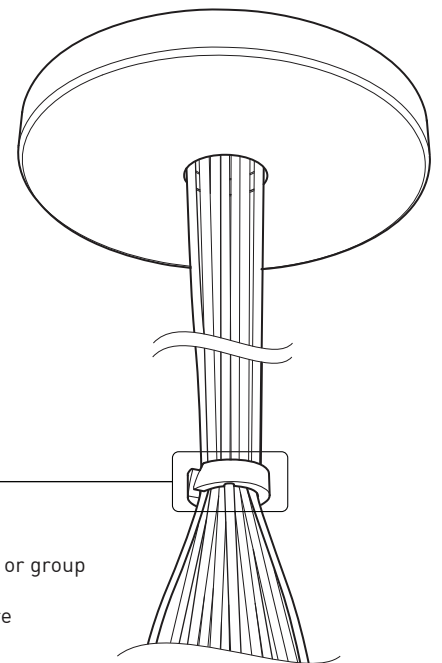


FIXTURE	CODE	Ø		LIGHT SOURCE		MAX. WATTAGE					
		10	16	LED	INC	LED			INC		
		Nb. FIXTURE				7	13	19	7	13	19
ALVER	MCC	7ou13	19	X	X	28W	52W	76W	420W	780W	1140W
ROLO PENDANT	MAD	7ou13	19	X		28W	52W	76W			
SPROKET	CFD	7ou13	19	X		28W	52W	76W			
MEHA	UAC	7ou13	19	X		28W	52W	76W			
FACET	UFC	7ou13	19	X		28W	52W	76W			
SLIM STACK	SLS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
STUBBY STACK	STS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
MIKA	RAP	7	13ou19	X		63W	117W	171W			
MIKA	RAQ	7	13ou19	X		91W	169W	247W			

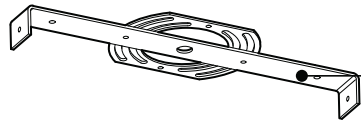

FACILE D'ASSEMBLAGE

- Installation sur boîte de jonction standard avec des points d'ancrage multiples
- Crochets de support fournis pour faciliter l'installation



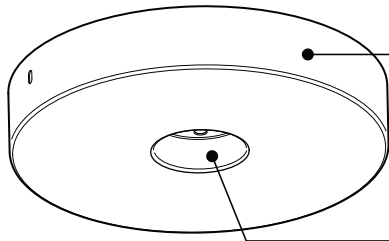


PAVILLON SIMPLE


Pavillon en acier repoussé et chromé avec espace nécessaire pour accueillir toutes les composants internes

SECTION CENTRALE

Pièce noir matte servant à camoufler les supports des fils

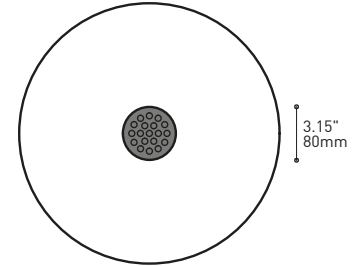



Grande variété de configurations




ACCESSOIRES

Permet une plus grande créativité

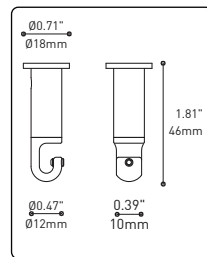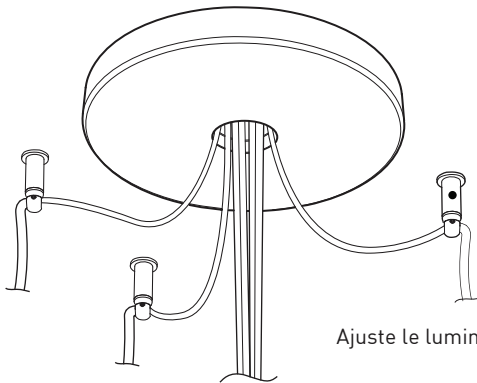


CROCHET 4901

Ajuste le luminaire à la hauteur désirée

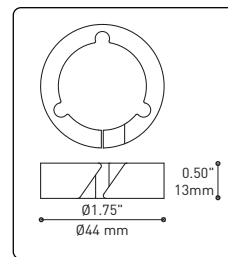

ANNEAU 4902

Redresse, organise et regroupe jusqu'à 19 câbles
Peux-être installé après l'installation du luminaire

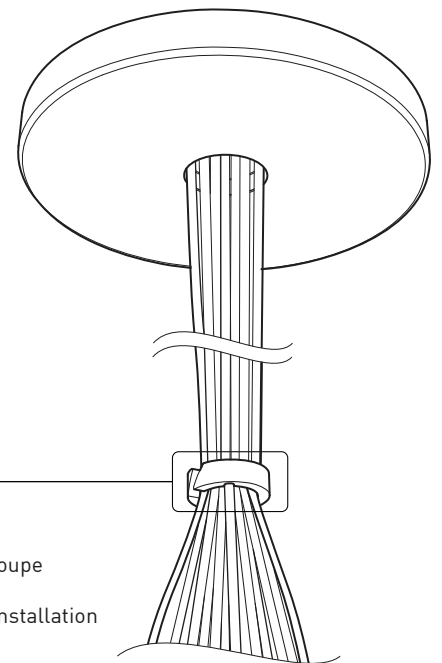

FIXTURE	CODE	SOURCE LUM.		MAX. WATTAGE							
		Ø 10	Ø 16	LED			INC				
		Nb. FIXTURE	LED	INC	7	13	19	7	13	19	
ALVER	MCC	7ou13	19	X	X	28W	52W	76W	420W	780W	1140W
ROLO PENDANT	MAD	7ou13	19	X		28W	52W	76W			
SPROKET	CFD	7ou13	19	X		28W	52W	76W			
MEHA	UAC	7ou13	19	X		28W	52W	76W			
FACET	UFC	7ou13	19	X		28W	52W	76W			
SLIM STACK	SLS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
STUBBY STACK	STS	7ou13	19	X	X	28W	52W	76W	350W	650W	950W
MIKA	RAP	7	13ou19	X		63W	117W	171W			
MIKA	RAQ	7	13ou19	X		91W	169W	247W			