

PENDANT KUBO SINGLE

3G-PKU

6", 8", 12" PENDANT

3G
LIGHTING



Surface Kubo Single



24" Pendant Kubo



24" Surface Kubo



Pendant Linear Kubo

FEATURES

CONSTRUCTION

- White sandblasted acrylic diffuser. Fabricated with mitered corners
- Fixture collar and mounting canopy fabricated in steel with powder coated finish
- Modified configurations available upon request

ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range.
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eldoLED Dali driver available with 100-1% dimming range

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of 60,000 hours
- Color consistency < 3 SDCM
- CRI > 80 for 27K, 30K, 35K, and 40K

LUMEN MAINTENANCE

- L70 at 60,000 hours

MOUNTING

- Suitable for various ceiling applications (see mounting details)
- Aircraft cable suspension with adjustable locking fasteners

FINISH

- Standard polyester powder coated matte white finish. Optional matte silver finish

LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

WARRANTY


- 5 Year limited warranty.

PROJECT

TYPE

DATE

CATALOG #

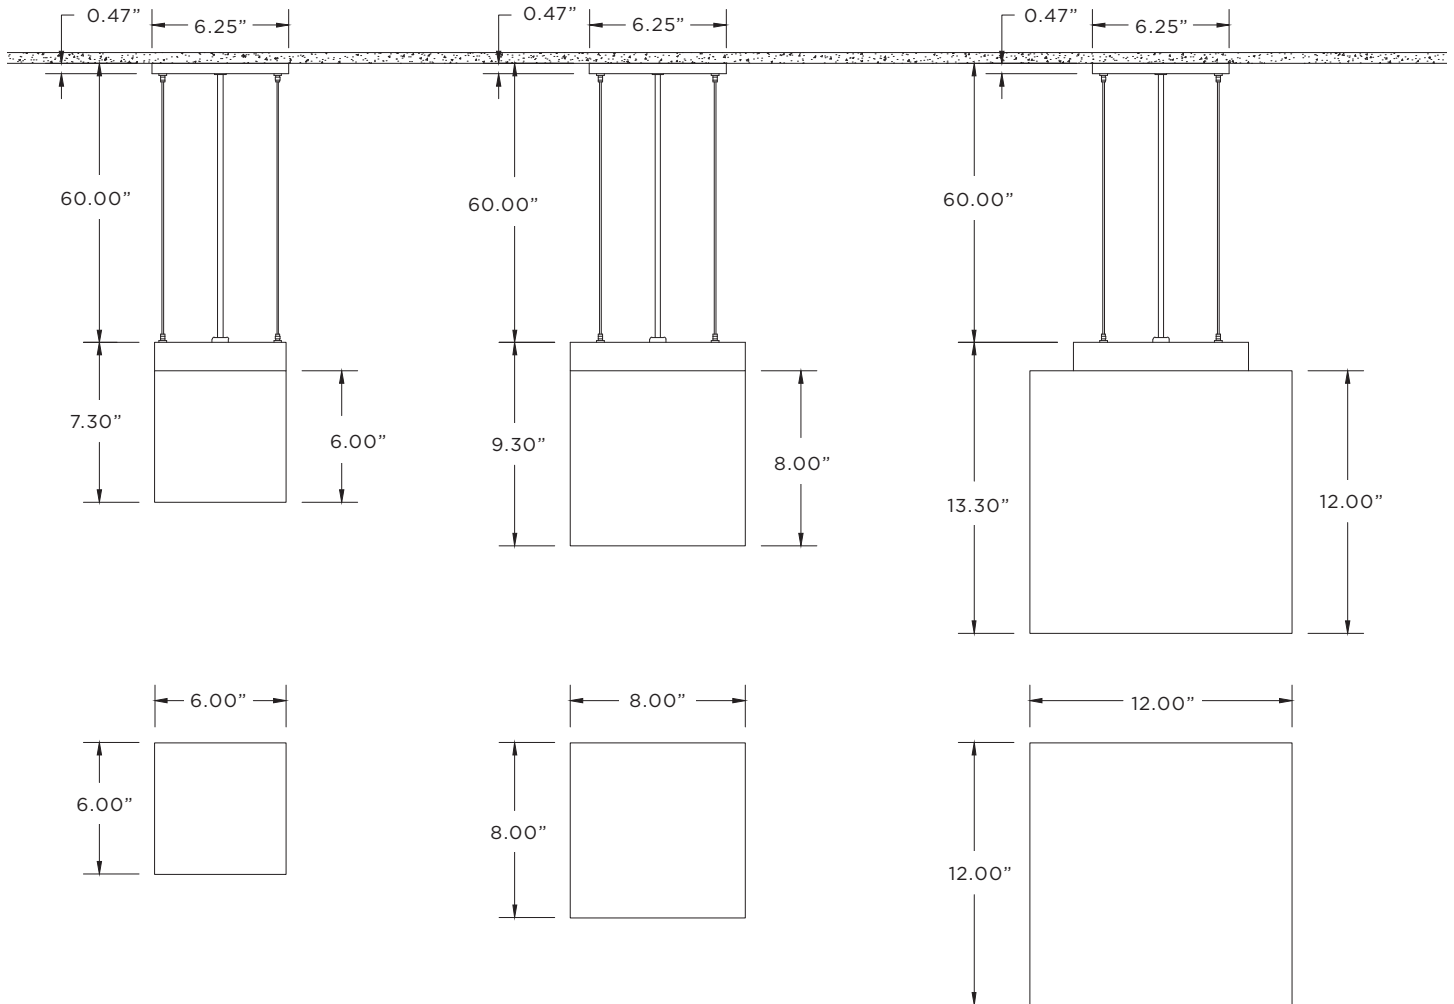

ORDERING INFORMATION

CAT. NO	SIZE	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER	FINISH	CABLE LENGTH
3G-PKU	601 - 6"	L2 - STANDARD OUTPUT	27K - 2700K	120 - 120V	DIM - 0-10V (STANDARD 100-1%) DHL - LUTRON (3-WIRE - 100-1%)	WH - WHITE (STANDARD) SV - SILVER	60 - 60" (STANDARD) 120 - 120"
	801 - 8"		30K - 3000K	277 - 277V			
	1201 - 12"	L4 - HIGH OUTPUT	35K - 3500K	347 - 347V (0-10V ONLY)	DHL2 - LUTRON (ECOSYSTEM - 100-1%) DALI - DALI (100-1%)		

3G-PKU

ORDERING EXAMPLE

3G-PKU801-L2-30K-120-DIM-WH-60

Copyright 2016 3G Lighting
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440
 3G reserves the right to change, without notice, specifications or materials for product improvement.



MADE IN NORTH AMERICA
 ARRA COMPLIANT



PENDANT KUBO SINGLE


3G-PKU
6", 8", 12" PENDANT



PERFORMANCE CHART (based on 3500K)

SIZE	LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	IES FILES
6"	STANDARD OUTPUT	5.1W	460	90	DOWNLOAD
	HIGH OUTPUT	11W	865	79	DOWNLOAD
8"	STANDARD OUTPUT	11.5W	652	57	DOWNLOAD
	HIGH OUTPUT	16.7W	856	51	DOWNLOAD
12"	STANDARD OUTPUT	11.5W	670	59	DOWNLOAD
	HIGH OUTPUT	16.7W	878	53	DOWNLOAD

MOUNTING

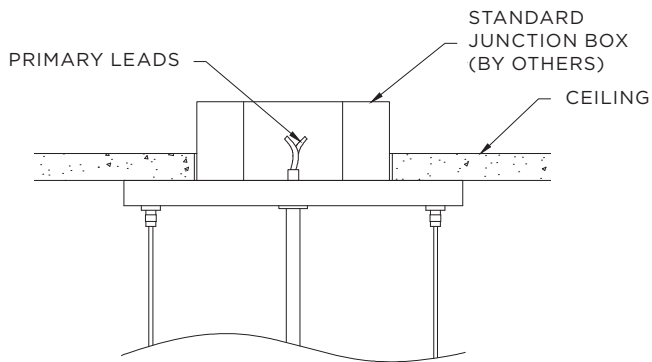

NOTES