



**Mira:** A decorative pendant luminaire that incorporates LEDs and mirrored acrylic to create a unique lighting effect. An inner white sandblasted acrylic diffuser subtly glows through the mirrored box while simultaneously creating countless reflections of itself. The pendant appears simply as a mirrored box when the lamp source is turned off.

8" & 12"

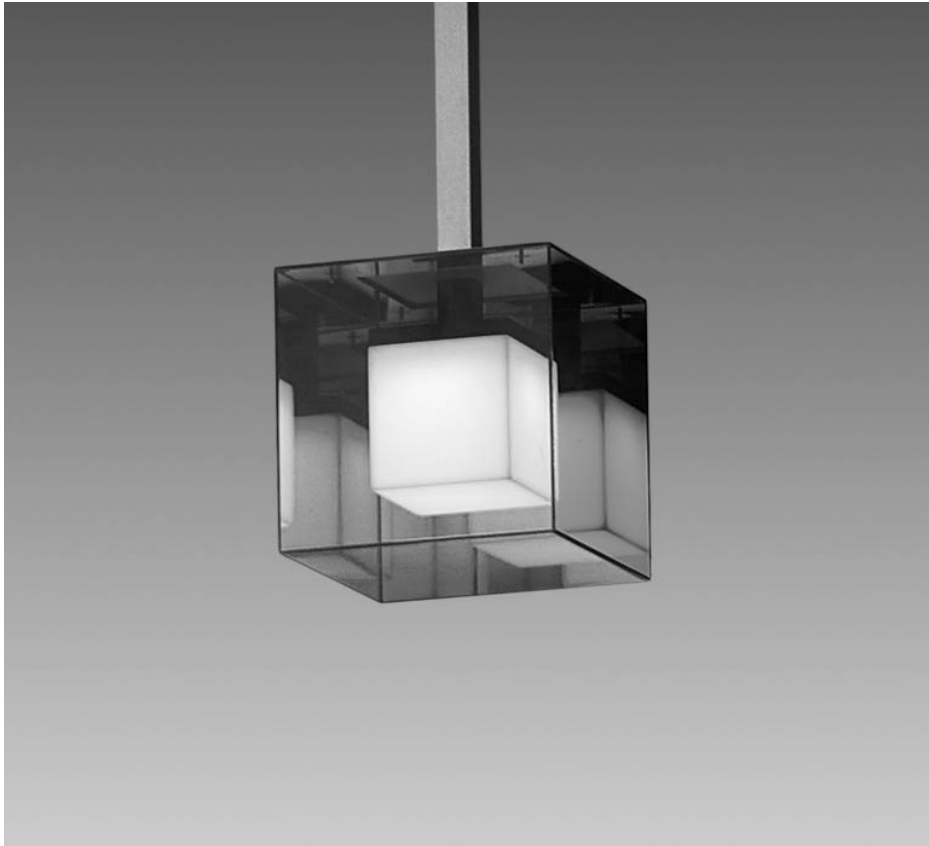

**FAMILY LUMINAIRE**

Surface Kubo



Pendant Kubo



LED Square Flat



LED Square Beveled



**CONSTRUCTION**

- Mirrored acrylic outer diffuser fabricated with mitered corners
- White sandblasted acrylic inner diffuser fabricated with mitered corners
- Fixture collar and mounting canopy fabricated in steel with powder coated finish
- 1" square aluminum hanging stem with powder coated finish
- Modified configurations available upon request

**LAMP ASSEMBLY**

- Available in white LEDs, static color LEDs, and color changing LEDs
- Each lamp source fully saturates the acrylic diffuser


**ELECTRICAL**

- Integral electronic drivers for white LEDs and static color LEDs
- Color changing LEDs must be connected to a remote 3G power supply and controller
- LED dimming options available


**MOUNTING**

- Canopy mounts to standard junction box
- Suitable for various ceiling types

**CANOPY DETAIL  
(REMOTE DRIVER)**




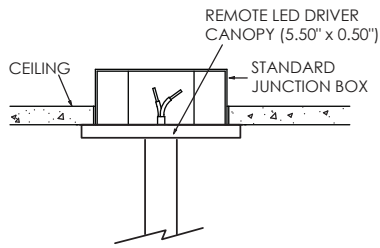


**CANOPY DETAIL  
(INTEGRAL DRIVER)**

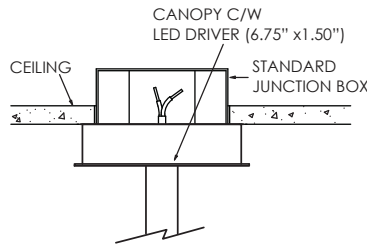

**LED COLOR CHANGING**

- COLOR CHANGING LED (LEDCC) MODELS MUST BE CONNECTED TO A 3G 24V LED CONTROLLER
- CONSULT FACTORY FOR CUSTOM CONFIGURATIONS

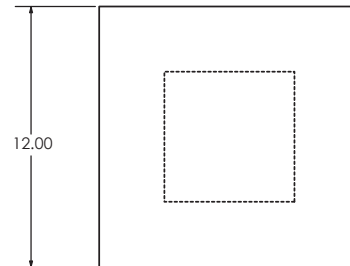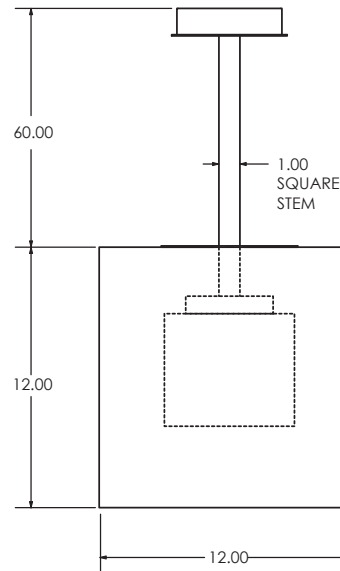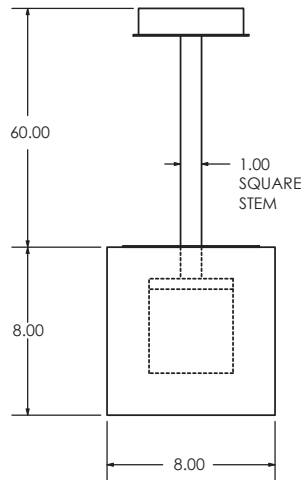

**ORDERING INFORMATION**



CAT. NO	SIZE	LAMP SOURCE	LED COLOR TEMP	VOLTAGE	POWER SUPPLY	CANOPY & STEM FINISH	STEM LENGTH
3G-PMI	84 - 8"	5LED - SW WHITE	30K - 3000K (LED)	120 - 120V	INT - INTEGRAL	SV - SILVER (STD)	60 - 60" (STD)
	126 - 12"	LED'X' - SINGLE COLOR LED	35K - 3500K (LED)	277 - 277V	RMT - REMOTE	BK - BLACK	
		LEDCC - COLOR CHANGING LED	40K - 4000K (LED)			CU - CUSTOM	

3G-PMI							
--------	--	--	--	--	--	--	--

**ORDERING EXAMPLE**    **3G-PMI84-5LED-30K-120-INT-SV-60**