



3G-PVLI

V-LINIA
PENDANT MOUNTED



Extruded aluminum housing with cast aluminum end caps
V-shaped acrylic lens is fully saturated with proprietary LED system
Individual fixtures or continuous runs available in 1' increments
Low, standard, and high lumen output options available
1% dimming standard with several integral driver options

ORDERING INFORMATION

PROJECT:	<input type="text"/>	TYPE:	<input type="text"/>
CATALOG #:	<input type="text"/>	DATE:	<input type="text"/>

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER
3G-PVLI	L1 - LOW OUTPUT L2 - STANDARD OUTPUT L4 - HIGH OUTPUT	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	UNV - 120V-277V 347 - 347V (0-10V ONLY)	DIM - 0-10V (STANDARD 100-1%) DHL2 - LUTRON (ECO SYSTEM "H" 100-1%) DALI - DALI (100-1%) DO1 - 0-10V (100-0.1%)

FINISH	CABLE LENGTH	OPTIONS	LENGTH (FEET)
WH - WHITE (STANDARD) BK - BLACK SV - SILVER <small>All mounting canopies provided in white as standard</small>	60 - 60" 120 - 120"	EM - INTEGRAL EMERGENCY BATTERY (4' SECTION)	S-2' - 2' S-3' - 3' S-4' - 4' S-5' - 5' S-6' - 6' S-8' - 8' S - ___' (STRAIGHT RUN)*

*For continuous runs (9' and up), specify length in feet in 1' increments

PERFORMANCE CHART (Based on 3500K, 4' length)

LED SYSTEM	SYSTEM WATTS (PER FT)	DELIVERED LUMENS (PER FT)	EFFICACY (LM/W)
L1 - LOW OUTPUT	3.4	396	118
L2 - STANDARD OUTPUT	4.9	584	120
L4 - HIGH OUTPUT	8.6	990	115

EDITION 01/19



TECHNICAL**HOUSING**

Extruded aluminum housing with cast aluminum end caps
Individual units and continuous runs available in 1' increments
24 gauge LED reflector with high reflectance white powder coated finish
Extruded acrylic lens with a satin finish designed for optimal performance and glare control
Standard polyester powder coated matte white finish. Optional finishes available

ELECTRICAL

Standard 0-10V, 100-1% dimming and 0.9 power factor
Standard 120V-277V universal voltage drivers. Optional 347V 0-10V driver
Lutron EcoSystem and eldoLED Dali options available with 100-1% dimming
Integral Emergency Battery option: 90 minutes

LED SYSTEM

Proprietary LED system
Color consistency < 3 SDCM
Standard (80+CRI)
Available in 27K, 30K, 35K, and 40K
Average rated life of > 50,000 hours
5-year warranty

MOUNTING

Suitable for drywall and wood ceilings (see mounting details)
Suitable for various grid ceilings applications (see mounting details)
Aircraft cable suspension with adjustable locking fasteners
All mounting canopies provided in white finish as standard

LISTING

ETL listed and tested to UL standards. Suitable for dry and damp locations

WARRANTY


5 Year warranty on LED and drivers
Manufacturer 1-year warranty for defects in material and workmanship under normal use
Ambient temperature at fixture should not exceed 25°C

3G

3G-PVLI


LIGHTING V-LINIA - PENDANT MOUNTED

DRAWINGS AND DIMENSIONS

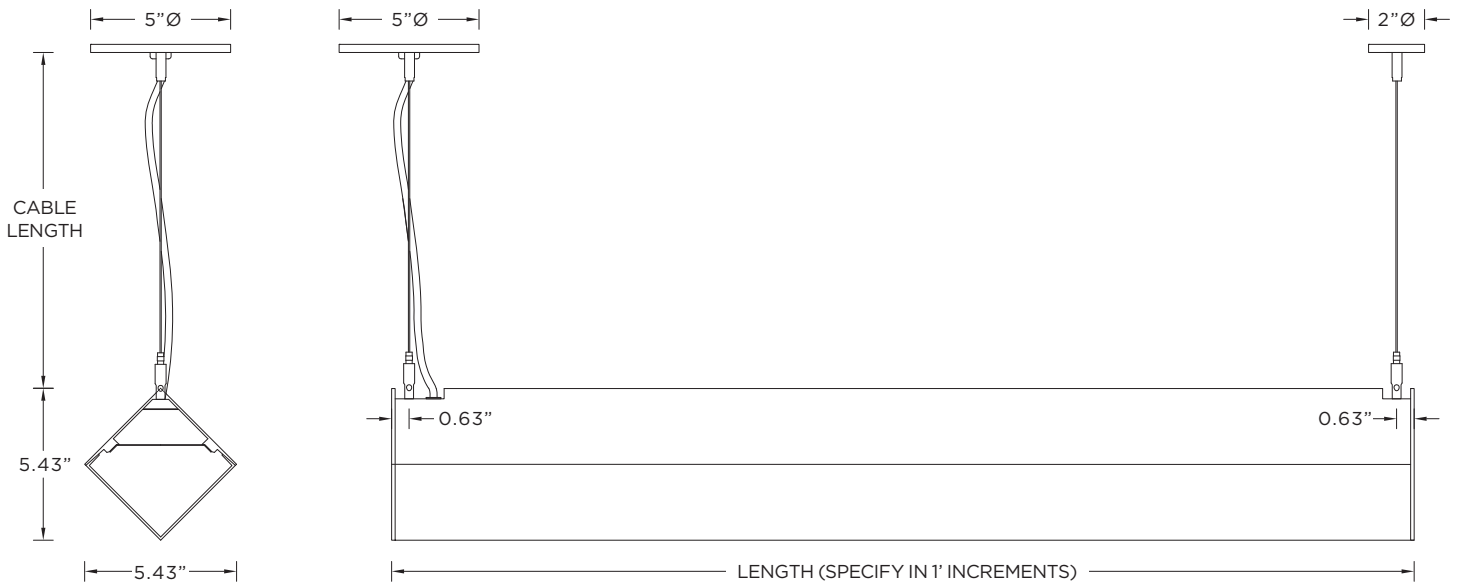


MOUNTING


GRID POWER FEED



GRID NON POWER FEED



DRYWALL POWER FEED



DRYWALL NON POWER FEED

