

SURFACE KUBO SINGLE

3G-SKU
4" & 4" SHORT

3G
LIGHTING



Pendant Kubo Single



Surface Kubo Multiple



24" Surface Kubo



Surface Linear Kubo

FEATURES

CONSTRUCTION

- White sandblasted acrylic diffuser. Fabricated with mitered corners
- Fixture collar fabricated in steel with powder coated finish
- Modified configurations available upon request

ELECTRICAL

- Remote electrical enclosure. Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eldoLED Dali driver available with 100-1% dimming range

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of 60,000 hours
- Color consistency < 3 SDCM
- CRI > 80 for 27K, 30K, 35K, and 40K

LUMEN MAINTENANCE

- L70 at 60,000 hours

MOUNTING

- Suitable for ceiling and wall applications
- Fixture mounts to a standard junction box

FINISH

- Standard polyester powder coated matte white finish. Optional matte silver finish

LABELS

- ETL listed. Suitable for dry or damp locations (indoor use)

WARRANTY


- 5 Year limited warranty.

PROJECT

TYPE

DATE

CATALOG #


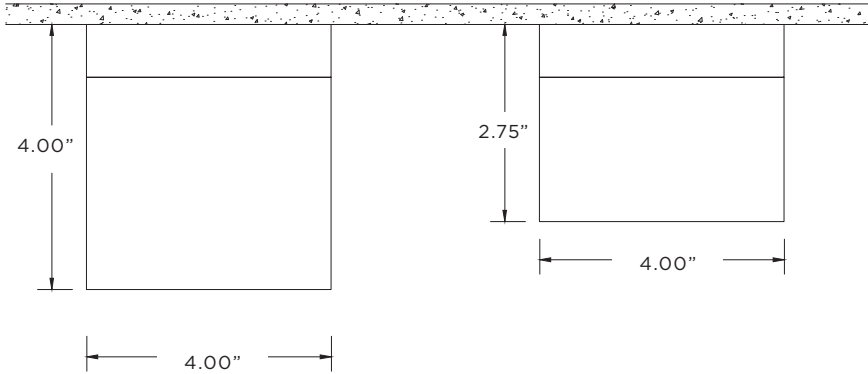


NOTE:

1. RECOMMENDED CABLE SIZE IS 14AWG (.823MM2 CSA),
2. MAXIMUM CABLE RUN FROM POWER SUPPLY TO LAST FIXTURE: 32 FEET
3. USE EXTREME CAUTION WHEN WIRING THE FIXTURE. REVERSING THE POLARITY MAY DAMAGE THE FIXTURE
4. REMOTE ELECTRICAL ENCLOSURE C/W 120/277V DIMMABLE DRIVE (0-10V, 100-1%)

120/277V DIMMABLE ELECTRONIC DRIVER (0-10V, 100-1%)

L2 (STANDARD OUTPUT) - MAX 7 FIXTURES CONNECTED IN PARALLEL
L4 (HIGH OUTPUT) - MAX 5 FIXTURES CONNECTED IN PARALLEL

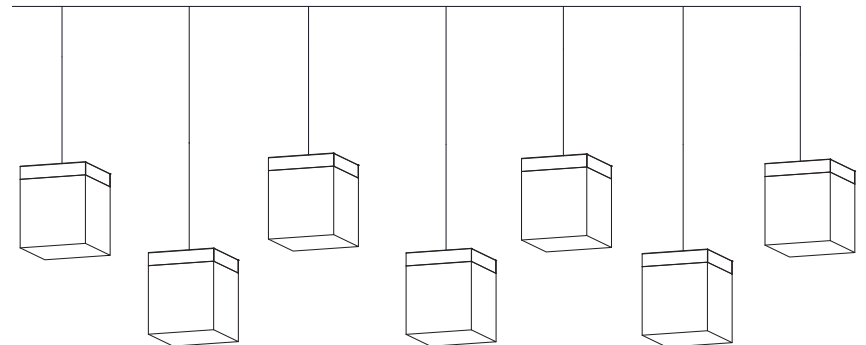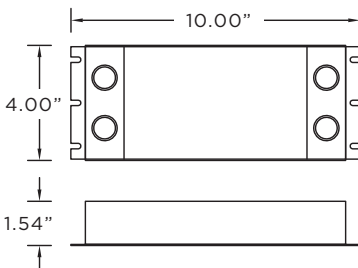

*PLEASE CONSULT 3G FOR CUSTOM CONFIGURATIONS

ORDERING INFORMATION

CAT. NO	SIZE	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER (SUPPLIED WITH REMOTE ENCLOSURE)	FINISH
3G-SKU	401 - 4"	L2 - STANDARD OUTPUT	27K - 2700K	120 - 120V	DIM - 0-10V (STANDARD 100-1%)	WH - WHITE (STANDARD)
	401S - 4" SHORT	L4 - HIGH OUTPUT	30K - 3000K	277 - 277V	DHL - LUTRON (3-WIRE - 100-1%)	SV - SILVER
			35K - 3500K	347 - 347V (0-10V ONLY)	DHL2 - LUTRON (ECOSYSTEM - 100-1%)	
			40K - 4000K		DALI - DALI (100-1%)	

3G-SKU

ORDERING EXAMPLE

3G-SKU401-L2-30K-120-DIM-WH

Copyright 2016 3G Lighting
 P: 905-850-2305 F: 905-851-6490 | TF: 888-448-0440
 3G reserves the right to change, without notice, specifications or materials for product improvement.



MADE IN NORTH AMERICA
 ARRA COMPLIANT



SURFACE KUBO SINGLE

3G-SKU
4" & 4" SHORT


3G
LIGHTING

PERFORMANCE CHART (based on 3500K)

SIZE	LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	IES FILES
4"	STANDARD OUTPUT	5.1W	460	90	DOWNLOAD DOWNLOAD
	HIGH OUTPUT	11W	865	79	
4" SHORT	STANDARD OUTPUT	11.5W	652	57	DOWNLOAD DOWNLOAD
	HIGH OUTPUT	16.7W	856	51	

P E N D I N G

MOUNTING

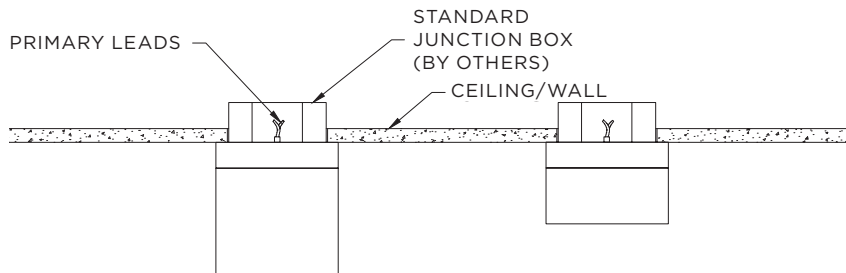

NOTES