SURFACE KUBO MULTIPLE SQUARE

3G-SKU8-SQ 8" SURFACE











FFEATURES

CONSTRUCTION

- White sandblasted acrylic diffuser. Fabricated with mitered corners
- Fixture collar fabricated in steel with powder coated finish
- Modified configurations available upon request

ELECTRICAL

- Standard 120-277V, 0-10V dimmable driver with 100-1% dimming range.
- 85% efficiency and 0.9 power factor
- Lutron driver options available with 100-1% dimming range
- eldoLED Dali driver available with 100-1% dimming range

LED SYSTEM

- Available in 27K, 30K, 35K, and 40K
- Average rated life of 60,000 hours
- Color consistency < 3 SDCM
- CRI > 80 for 27K, 30K, 35K, and 40K

LUMEN MAINTENANCE

■ L70 at 60,000 hours

MOUNTING

- Suitable for surface mounted installations
- Fixture mounts to a standard junction box

FINISH

Standard polyester powder coated matte white finish. Optional matte silver finish

LABELS

■ ETL listed. Suitable for dry or damp locations (indoor use)

WARRANTY

■ 5 Year limited warranty.

24" Surface Kubo



Surface Linear Kubo


PROJECT


TYPE

DATE

3G

CATALOG#

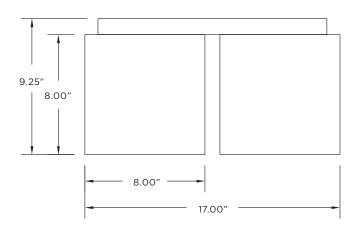

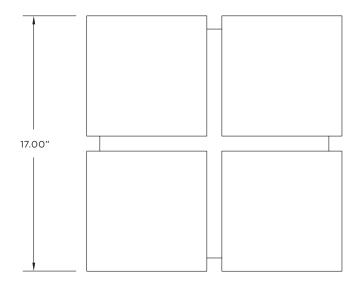

ORDERING INFORMATION

CAT. NO	LED SYSTEM	COLOR TEMP	VOLTAGE	DRIVER	FINISH
3G-SKU8 -SQ	L2 - STANDARD OUTPUT L4 - HIGH OUTPUT	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	120 - 120V 277 - 277V 347 - 347V (0-10V ONLY)	DIM - 0-10V (STANDARD 100-1%) DHL - LUTRON (3-WIRE-100-1%) DHL2 - LUTRON (ECOSYSTEM-100-1%) DALI - DALI (100-1%)	WH - WHITE (STANDARD) SV - SILVER
3G-SKU8 -SQ					

ORDERING EXAMPLE

3G-SKU8**-SQ**-L2-35K-120-DIM-WH

Copyright 2016 3G Lighting

P: 905-850-2305 P: 905-851-6490 | TF: 888-448-0440 3G reserves the right to change, without notice, specifications or materials for product improvement.











SURFACE KUBO MULTIPLE SQUARE


3G-SKU8-SQ 8" SURFACE



PERFORMANCE CHART (based on 3500K)

LED SYSTEM	SYSTEM WATTS	DELIVERED LUMENS	EFFICACY LM/W	IES FILES
STANDARD OUTPUT	45W	4599 = D	103 G	DOWNLOAD
HIGH OUTPUT	60W	6182	103	DOWNLOAD

MOUNTING

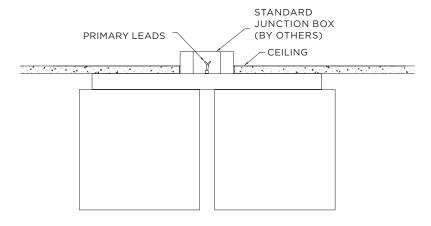

NOTES