

Ciro SQ

Ciro SQ is a simple, economical solution to provide general illumination. Use Ciro SQ as a suspended or ceiling luminaire.



Model 1280 **1280**

Type
 P Pendant
 C Ceiling

Size
 7 7"
 Custom

Wattage¹
 L 8.4W (131lm) @ 500mA
 M 12.6W (1710lm) @ 700mA

Color Temp²
 827 2700
 830 3000
 835 3500
 840 4000


Voltage
 U 120/277
 I 120VAC only

Control (Constant Current)
 S Non-dim (Integral)
 D010 0-10V 10% (Integral)
 ECO30W EldoLED 0-10V 1% (Remote)
 DFPN Lutron Forward Phase 1% 120VAC (Remote)
 PEQ1 Lutron Hi-lume 1% EcoSystem (Remote)
 PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem (Remote)

Diffuser
 SA Satin clear acrylic **SA**


Finish³
 19 Painted anodized aluminum - RAL 9006 matte
 21 Painted white - RAL 9010 matte
 26 Painted black - RAL 9005 matte
 22 Painted custom color

Options
 CC Clear insulated cable (standard)⁴
 WC White cable
 BC Black cable

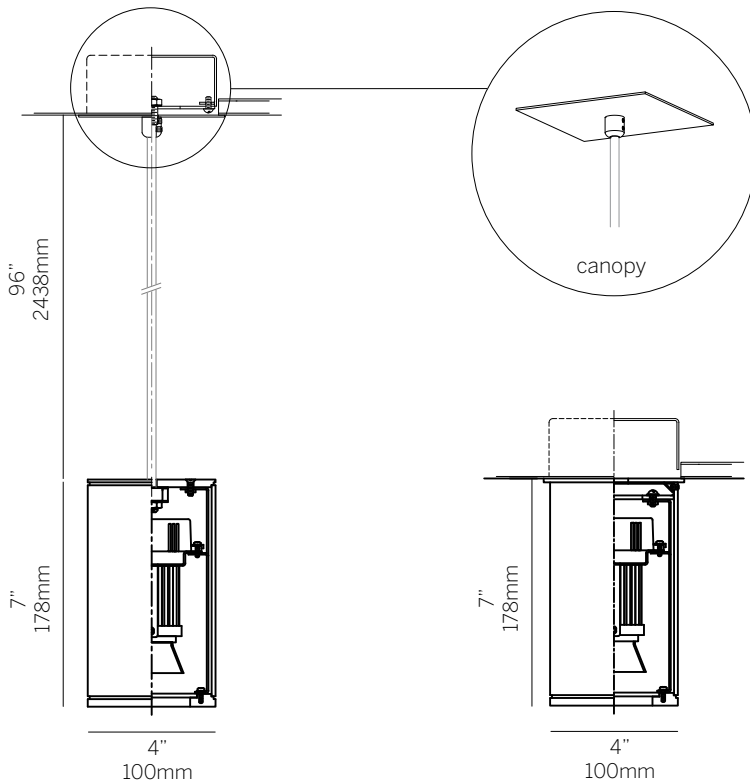

Pendant

Ceiling



Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard



For up to date technical information, refer to inter-lux.com/alm



inter-lux.com/alm