

## Ciro RD

Ciro RD is a simple, economical solution to provide general illumination. Use Ciro RD as a suspended or ceiling luminaire.



**Model 1282** **1282**

**Type** \_\_\_\_\_

P Pendant

C Ceiling

**Size** \_\_\_\_\_

7 7"

Custom

**Wattage<sup>1</sup>** \_\_\_\_\_

L 8.4W (131lm) @ 500mA

M 12.6W (1710lm) @ 700mA

**Color Temp<sup>2</sup>** \_\_\_\_\_

827 2700

830 3000

835 3500

840 4000

**Voltage** \_\_\_\_\_

U 120/277

I 120VAC only

**Control (Constant Current)** \_\_\_\_\_

S Non-dim (Integral)

D010 0-10V 10% (Integral)

ECO30W EldoLED 0-10V 1% (Remote)

DFPN Lutron Forward Phase 1% 120VAC (Remote)

PEQ1 Lutron Hi-lume 1% EcoSystem (Remote)

PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem (Remote)

**Diffuser** \_\_\_\_\_

SA Satin clear acrylic

**SA**

**Finish<sup>3</sup>** \_\_\_\_\_

19 Painted anodized aluminum - RAL 9006 matte

21 Painted white - RAL 9010 matte

26 Painted black - RAL 9005 matte


22 Painted custom color

**Options** \_\_\_\_\_

CC Clear insulated cable (standard)<sup>4</sup>


WC White cable

BC Black cable

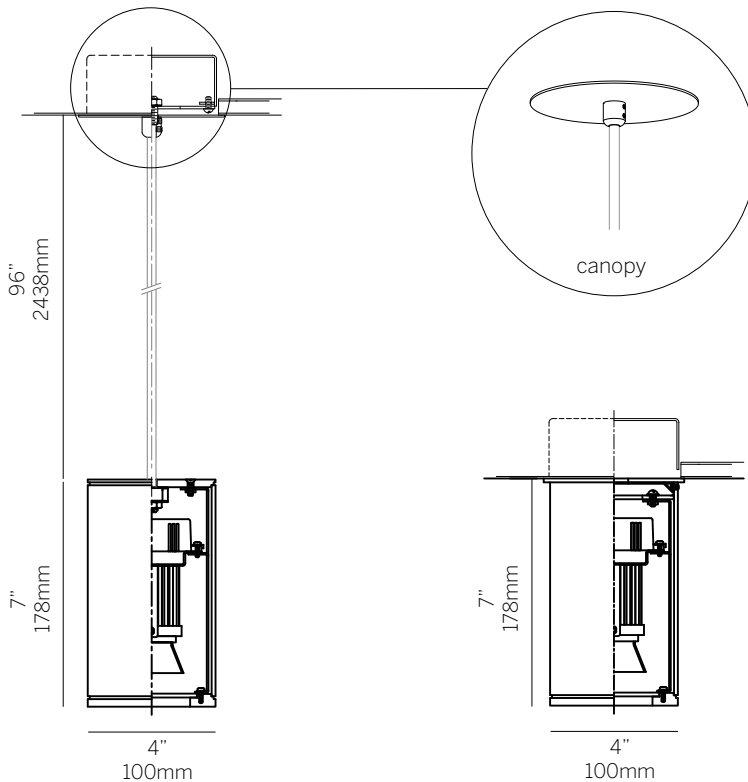

Pendant

Ceiling



### Notes

<sup>1</sup>Nominal lumens

<sup>2</sup>82 CRI standard / 90 CRI available

<sup>3</sup>Canopy finish matches housing

<sup>4</sup>96" clear insulated cable standard



For up to date technical information, refer to [inter-lux.com/alm](http://inter-lux.com/alm)



[inter-lux.com/alm](http://inter-lux.com/alm)