



Aura

Suspended and surface mostly direct luminaire with 10% uplight in multiple sizes and lumen packages to illuminate all size spaces.

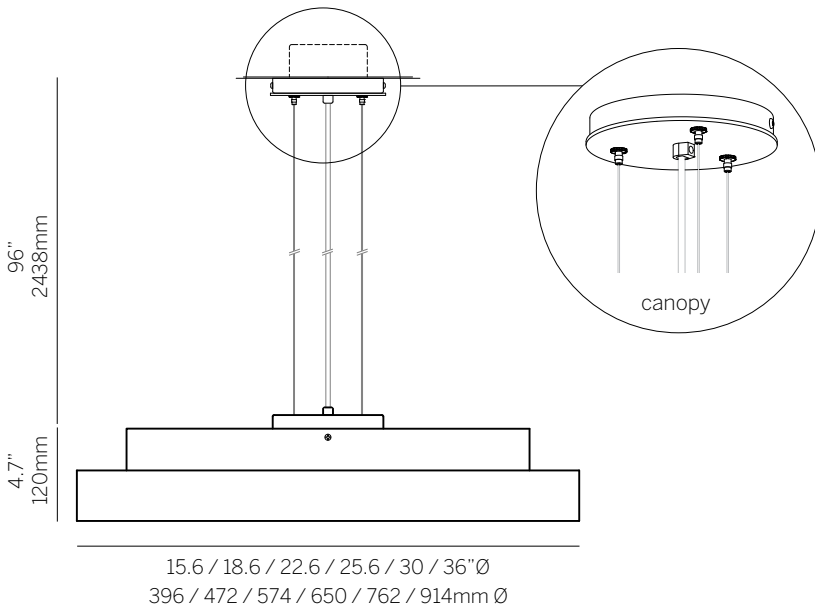

Pendant

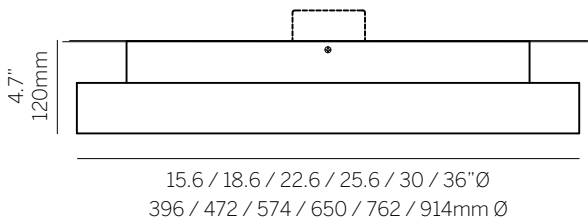

Surface

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Remote 15", 18", Integral 22", 25", 30", 36"
- ⁴Canopy finish matches housing
- ⁵96" clear insulated cable standard

inter•lux

Model 1520 **1520**

Type

- P Pendant
- S Surface

Size

- 15 15.6" Ø
- 18 18.6" Ø
- 22 22.6" Ø
- 25 25.6" Ø
- 30 30" Ø
- 36 36" Ø
- Custom

Wattage¹

- 15"
 - L 9W (1200lm)
 - M 18W (2229lm)
- 18"
 - L 11W (1467lm)
 - M 22W (2724lm)
- 22"
 - L 15W (2000lm)
 - M 30W (3715lm)
- 25"
 - L 22W (2933lm)
 - M 44W (5449lm)
- 30"
 - L 33W (4400lm)
 - M 66W (8173lm)
- 36"
 - L 56W (7467lm)

Color Temp²

- 827 2700
- 830 3000
- 835 3500
- 840 4000

Voltage

- U 120/277
- I 120VAC only

Control (24V)³

- S Non-dim
- D010 0-10V 10%
- DFPN Lutron Forward Phase 1% 120VAC
- L3DAE Lutron Hi-lume 1% EcoSystem
- L3DOE Lutron Hi-lume Premier 0.1% EcoSystem (Remote only)

Diffuser

- SW Satin opal acrylic **SW**

Finish⁴

- 19 Painted anodized aluminum - RAL 9006 matte
- 21 Painted white - RAL 9010 matte
- 22 Painted custom color

Options

- CC Clear insulated cable (standard)⁵
- WC White cable
- BC Black cable

