

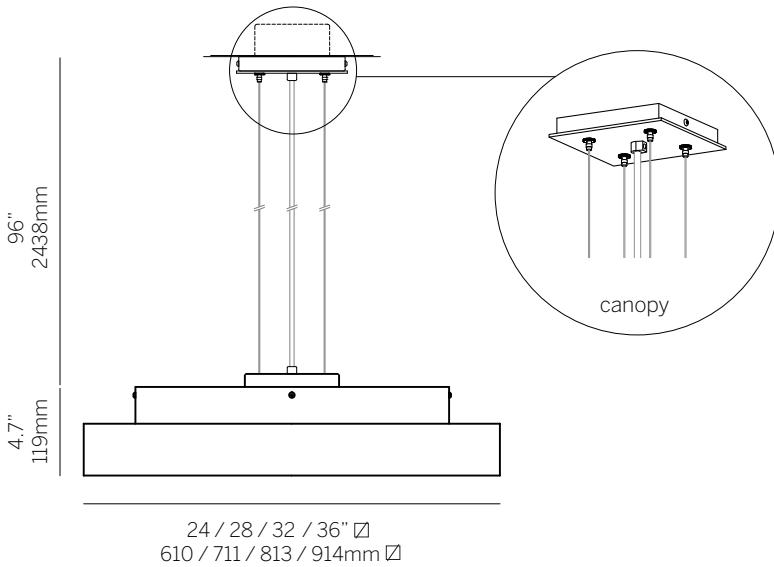


Step

Shallow, square pendant or surface mounted versions in various sizes, with 10% uplight. Even illumination on the satin white lens. Also available in ceiling mount version.

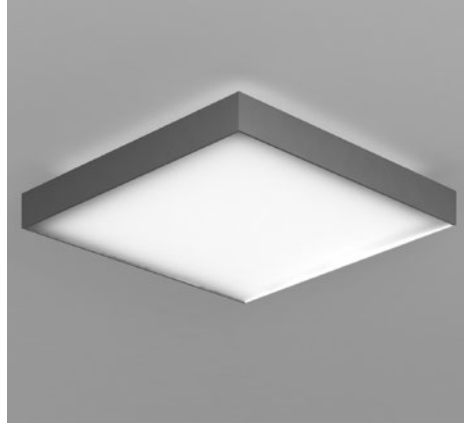

Pendant

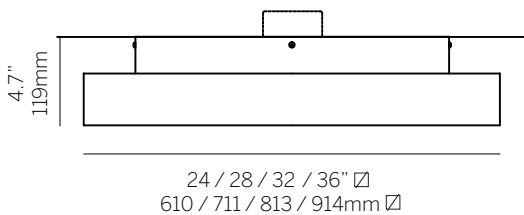

Surface

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard

inter•lux

Model 1540 **1540**

Type _____

- P Pendant
- S Surface

Size _____

- 24 24" \square
- 28 28" \square
- 32 32" \square
- 36 36" \square
- Custom

Wattage¹ _____

- 24"
 - L 28W (3733lm)
- 28"
 - L 40W (5333lm)
- 32"
 - L 54W (7200lm)
- 36"
 - L 77W (10267lm)

Color Temp² _____

- 827 2700
- 830 3000
- 835 3500
- 840 4000

Voltage _____

- U 120/277
- I 120VAC only

Control (24V) _____

- S Non-dim (Integral)
- D010 0-10V 10% (Integral)
- DFPN Lutron Forward Phase 1% 120VAC (Integral)
- L3DAE Lutron Hi-lume 1% EcoSystem (Integral)
- L3D0E Lutron Hi-lume Premier 0.1% EcoSystem (Remote)

Diffuser _____

- SW Satin opal acrylic (bottom)
- XX Clear polycarbonate - sanded both sides (top)

Finish³ _____

- 16 Clear anodized aluminum
- 21 Painted white - RAL 9010 matte
- 22 Painted custom color

Options _____

- CC Clear insulated cable (standard)⁴ _____
- WC White cable
- BC Black cable

