

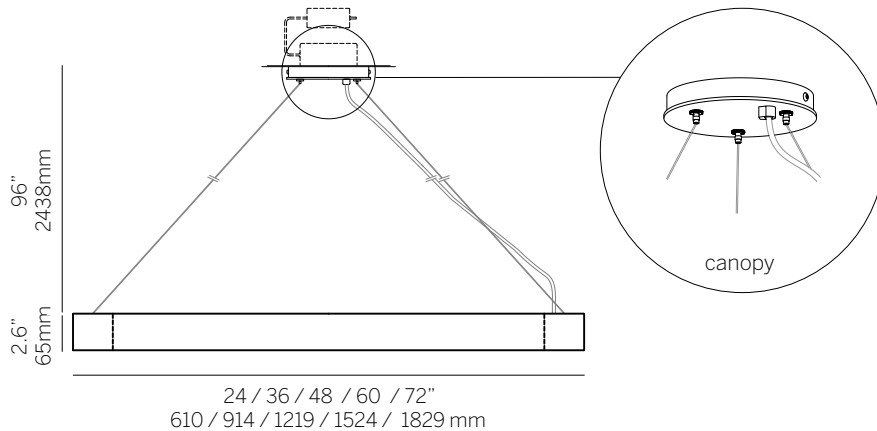


## Ring D

Simple Ring D with direct illumination in various diameters and lumen packages can be used in a wide variety of applications. Consider modifying the Ring, or adding other standard or custom products to meet special requirements.



Center Canopy (standard)  
(suspension varies with fixture size please confirm with factory)

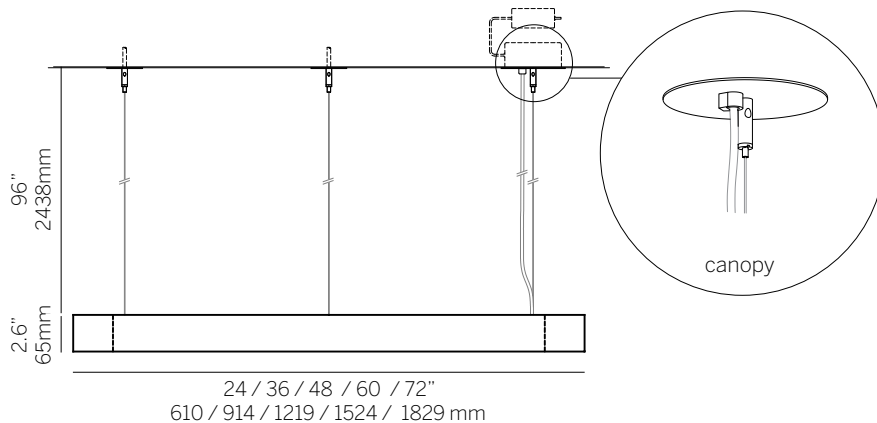

Straight Cables

### Notes

- <sup>1</sup>Nominal lumens
- <sup>2</sup>82 CRI standard / 90 CRI available
- <sup>3</sup>Canopy finish matches housing
- <sup>4</sup>96" clear insulated cable standard

**Model 1691**

**1691**

### Type

P Pendant

**P**

### Size

24 24"  
36 36"  
48 48"  
60 60"  
72 72"  
Custom

### Wattage<sup>1</sup>

24"  
L 17W (2267lm)  
M 34W (4211lm)  
RGB 60W (1551lm)  
36"  
L 26W (3467lm)  
M 52W (6440lm)  
RGB 92W (2397lm)  
48"  
L 35W (4667lm)  
M 70W (8669lm)  
RGB 125W (3243lm)  
60"  
L 45W (6000lm)  
M 90W (11145lm)  
RGB 162W (4230lm)  
72"  
L 54W (7200lm)  
M 108W (13374lm)  
RGB 195W (5076lm)

### Color Temp<sup>2</sup>

827 2700  
830 3000  
835 3500  
840 4000  
RGB RGB

### Voltage

U 120/277  
I 120VAC only

### Control (Remote 24V)

S Non-dim  
D010 0-10V 10%  
DFPN Lutron Forward Phase 1% 120VAC  
L3DAE Lutron Hi-lume 1% EcoSystem  
L3DOE Lutron Hi-lume Premier 0.1% EcoSystem  
DMX DMX dimming

### Diffuser

SW Satin opal acrylic

**SW**

### Finish<sup>3</sup>

19 Painted anodized aluminum - RAL 9006 matte  
21 Painted white - RAL 9010 matte  
26 Painted black - RAL 9005 matte  
22 Painted custom color

### Options

CE Center canopy  
SC Straight cables  
CC Clear insulated cable (standard)<sup>4</sup>  
WC White cable  
BC Black cable

