


# Sigma

Wall sconce with formed aluminum housing and machined end caps. Diffuser is Clear Satin Acrylic. The fixture can be arranged vertically or horizontally.

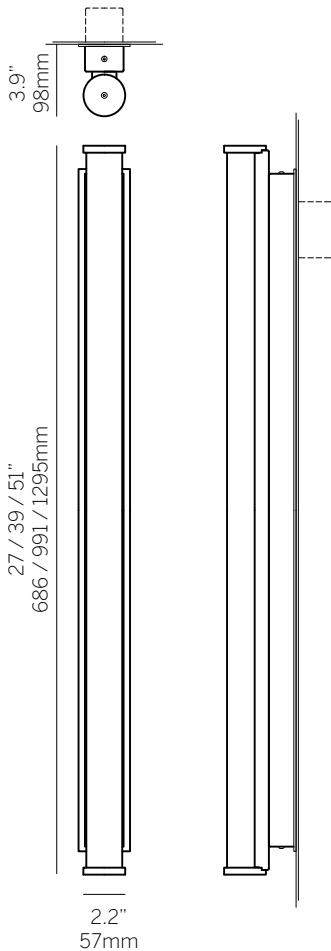

# inter•lux

<b>Model 1740</b>		<b>1740</b>
<b>Type</b>		
W	Wall	<b>W</b>
<b>Size</b>		_____
27	27"	
39	39"	
51	51"	
Custom		
<b>Wattage<sup>1</sup></b>		_____
27"		
L	6W (800lm)	
M	12W (1486lm)	
H	20W (2348lm)	
39"		
L	9W (1200lm)	
M	18W (2229lm)	
H	30W (3522lm)	
51"		
L	12W (1600lm)	
M	24W (2972lm)	
H	40W (4696lm)	
Wet location		
27"		
M	10W (750lm)	
39"		
M	14W (1125lm)	
51"		
M	19W (1500lm)	
<b>Color Temp<sup>2</sup></b>		_____
827	2700	
830	3000	
835	3500	
840	4000	
<b>Voltage</b>		_____
U	120/277	
I	120VAC only	
<b>Control (24V)<sup>3</sup></b>		_____
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
DFPN	Lutron Forward Phase 1% 120VAC (Integral)	
L3DAE	Lutron Hi-lume 1% EcoSystem (Integral)	
L3D0E	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
<b>Diffuser</b>		
SA	Satin clear acrylic	<b>SA</b>
<b>Finish<sup>3</sup></b>		_____
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
22	Painted custom color	
<b>Options</b>		
EC	Chrome end caps	_____
WL	Wet location	_____

### Notes

<sup>1</sup>Nominal lumens

<sup>2</sup>82 CRI standard / 90 CRI available

<sup>3</sup>For wet location all controls are remote

For up to date technical information, refer to [inter-lux.com/alm](http://inter-lux.com/alm)



[inter-lux.com/alm](http://inter-lux.com/alm)