


Clearline Wall

The Clearline Wall is a simple linear lighting option for ambient illumination in public or private spaces providing both direct and indirect lighting performance.

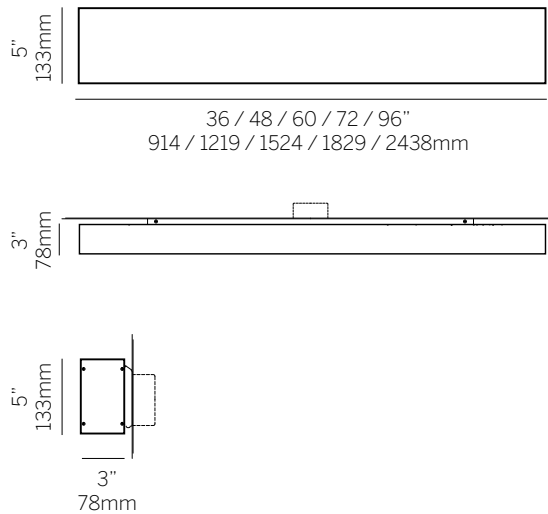

Model CL2

Type

W Wall

Size

36 36"
48 48"
60 60"
72 72"
96 96"
Custom

Wattage¹ direct²

36"
LD 9W (1200lm)
MD 18W (2229lm)
HD 30W (3522lm)

48"

LD 12W (1600lm)
MD 24W (2972lm)
HD 40W (4696lm)

60"

LD 15W (2000lm)
MD 30W (3715lm)
HD 50W (5870lm)

72"

LD 18W (2400lm)
MD 36W (4458lm)
HD 60W (7044lm)

96"

LD 24W (3200lm)
MD 48W (5944lm)
HD 80W (9392lm)

CL2

W

indirect²

LI 9W (1200lm)
MI 18W (2229lm)
HI 30W (3522lm)

LI 12W (1600lm)
MI 24W (2972lm)
HI 40W (4696lm)

LI 15W (2000lm)
MI 30W (3715lm)
HI 50W (5870lm)

LI 18W (2400lm)
MI 36W (4458lm)
HI 60W (7044lm)

LI 24W (3200lm)
MI 48W (5944lm)
HI 80W (9392lm)

Color Temp³

827 2700
830 3000
835 3500
840 4000

Voltage

U 120/277
1 120VAC only

Control (24V)

S Non-dim (Integral)
D010 0-10V 10% (Integral)
DFPN Lutron Forward Phase 1%
120VAC (Integral)
L3DAE Lutron Hi-lume 1% EcoSystem
(Integral)
L3DOE Lutron Hi-lume Premier 0.1%
EcoSystem (Remote)

Diffuser

SA Satin clear acrylic (top)
SW Satin opal acrylic (bottom)

SA
SW

Finish

16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
22 Painted custom color

Options

DC Dual circuit

Notes

¹Nominal lumens

²For no direct or indirect light specify 00

³82 CRI standard / 90 CRI available

