


**PROJECT INFORMATION**

Project:


Type:

**IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**

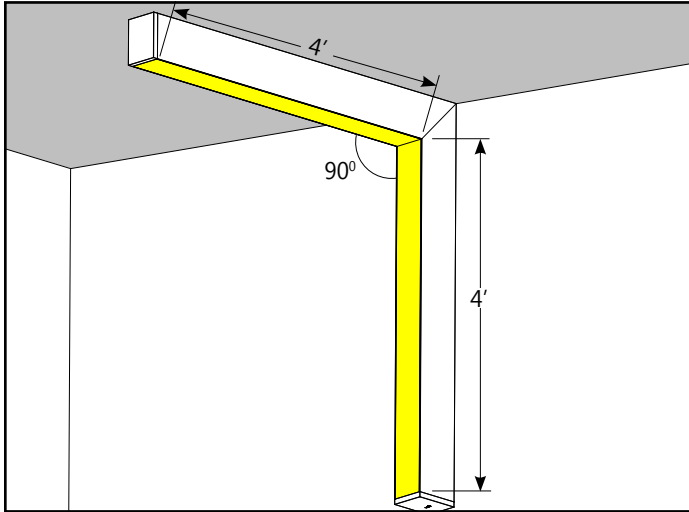

BBSLEDPAT	OPI	90	8'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

3D VIEW - Inside Corner Pattern

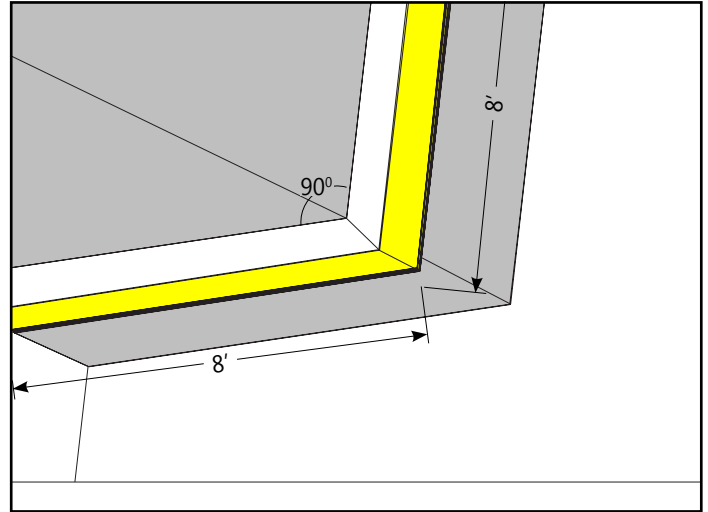

BBSLEDPAT	OPO	60	16'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

3D VIEW - Outside Corner Pattern

**PRODUCT SPECIFICATIONS**

PRODUCT ID	PATTERNS	CORNER DEGREES	LUMENS/FT	CRI
<b>BSLEDPAT</b> beam2led surface	<b>OPO</b> open shape outside lit corner	<b>90</b> 90 degrees	<b>400</b> 400 lm/ft	<b>80</b> 80 CRI
<b>BMSLEDPAT</b> beam3led surface	<b>OPI</b> open shape inside lit corner	<b>#</b> other degree	<b>500</b> 500 lm/ft	<b>90</b> 90 CRI
<b>BBSLEDPAT</b> beam4led surface	<b>OPOI</b> open shape outside/inside lit corner		<b>750</b> 750 lm/ft	
<b>B6SLEDPAT</b> beam6led surface			<b>1000</b> 1000 lm/ft	
				Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.

COLOUR TEMP.	SHIELDING	LENGTH/FT	SPECIFY LENGTH	FINISH	VOLTAGE	DRIVER
<b>27</b> 2700 K	<b>SO</b> spotless lens	<b>#</b> total pattern length	<b>NL</b> nominal <b>EX</b> exact	<b>W</b> white <b>C</b> custom	<b>120</b> 120V <b>277</b> 277V <b>347</b> 347V <sup>(1)</sup> <b>UNV</b> universal	<b>D</b> dimming (0-10V) 1% <b>DP</b> dimming (0-10V) 5% 347V standard <sup>(2)</sup> <b>LT</b> Lutron <sup>(3)</sup> <b>BI</b> bi-level dimming <b>O</b> other <sup>(4)</sup>
<b>35</b> 3500 K					(1) D dimming (0-10V) 5% standard	(2) For 347V only (3) Specify system (4) Please consult factory; see page 2
<b>30</b> 3000 K						
<b>40</b> 4000 K						

CIRCUITS	MOUNTING	BATTERY	OTHER	CUSTOM (OPTIONAL)
<b>1</b> 1 circuit <b>2</b> 2 circuits <b>+E(#)</b> emergency circuit <sup>(5)</sup> <b>+NL(#)</b> night light circuit <sup>(5)</sup> <b>+GTD(#)</b> generator transfer device <sup>(5)</sup>	<b>S</b> surface drywall ceiling <b>SB</b> surface t-bar ceiling <b>SC</b> surface solid ceiling	<b>B#</b> battery pack 4' sections	<b>F</b> fuse <sup>(6)</sup> <b>EF</b> end feed <b>FW(#)</b> flex whip (6' std) <b>CP</b> Chicago plenum	<b>C</b> custom
(5) Specify quantity		Requires 120V or 277V Please consult factory	(6) Requires 120V or 277V	Please specify

● **LIT CORNER FEATURES**

The Lit Corner system allows continuous illumination all the way through the corner section


To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.

**Inside Illuminated Corner.** A fully lit corner on the inside planes.

**Outside Illuminated Corner** - A fully lit corner on the outside planes.

**TIP:** Provide sketches illustrating corner types and locations required.

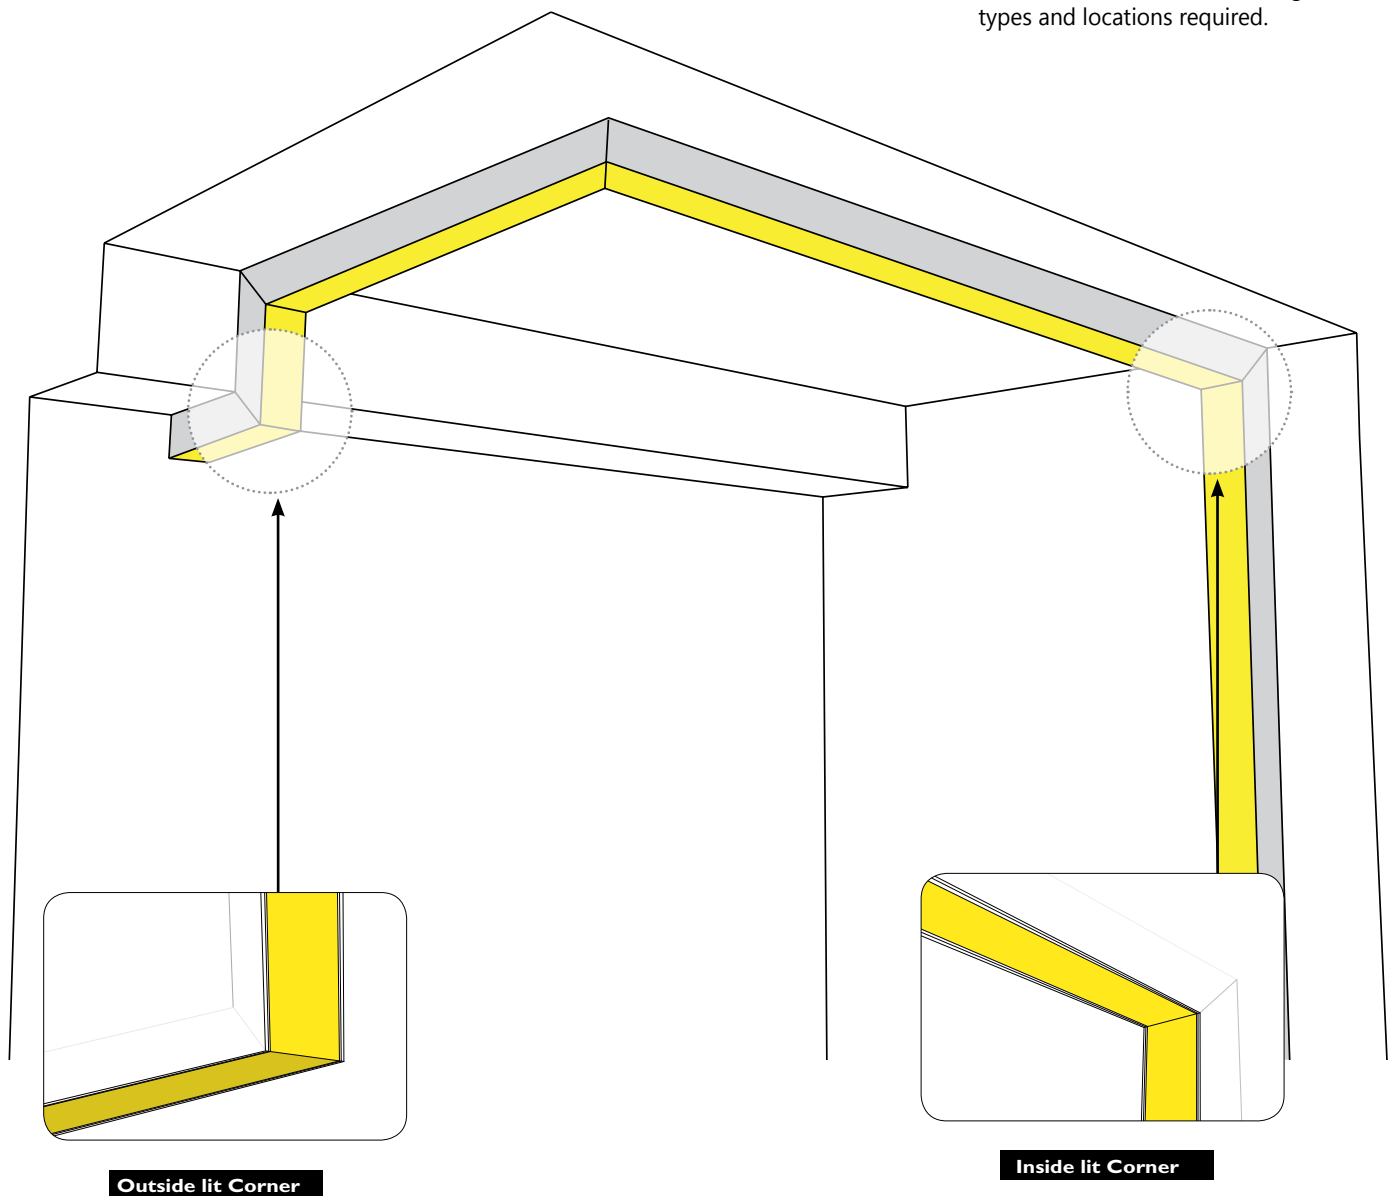

**IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.**

