

● **PROJECT INFORMATION**



Project:

Type:

Notes:

● **DIMENSIONS**

SECTION VIEWS

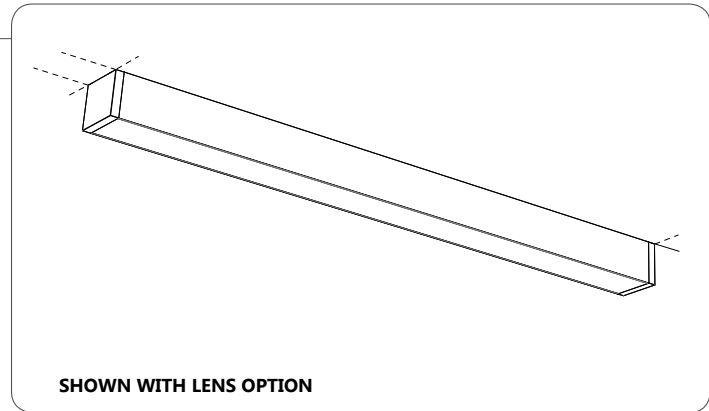

● **ORDERING CODE**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----

● **PRODUCT SPECIFICATIONS**

1 PRODUCT ID	2 OPTICS	3 LENGTH/FT	4 SPECIFY LENGTH	5 LAMP	6 LAMP CONFIGURATION
BMS surface	S satin lens F frosted lens ⁽¹⁾ PL semi spec. para. louvers B blank	2 2' 3 3' 4 4' 5 5' 6 6' 8 8' 12 12' S# System Run	NL nominal (3' & 4' lamps) NL4 nominal (4' lamps only) EX exact (3' & 4' lamps) EX4 exact (4' lamps only)	T5 T5 T5HO T5HO T8 T8	0 0 lamp 1 1 lamp 2 2 lamps ⁽²⁾ +S staggered ⁽³⁾
	(1) not recommended with staggered lamping				(2) Not available for T8 lamping. (3) Staggered one T5/T5HO lamps only.

7 MR	8 FINISH	9 VOLTAGE	10 BALLAST	11 CIRCUITS	12 MOUNTING/SUSPENSION
M16# MR 16 halogen M16LED# MR 16 LED	AP aluminum paint W white BLK black C custom	120 120V 277 277V 347 347V ⁽⁴⁾ UNV universal	D dimming E instant start ⁽⁵⁾ ERS program start BI bi-level dimming	1 1 regular 2 2 regular 2A/B 2 alternating +E(#) emergency section +NL(#) night light section +GTD(#) generator transfer device +M MR	S surface drywall ceiling SB surface t-bar ceiling SC surface solid ceiling
Add 9" per lamp Requires 120v or 277V		(4) Please consult factory	(5) Available with T8 lamp only		

13 BATTERY (OPTIONAL)	14 OTHER (OPTIONAL)	15 IC CONTROLS (OPTIONAL)	16 CUSTOM (OPTIONAL)
B# battery pack 4' sections	F fuse EF end feed FW(#) flex whip (6' std)	DS# daylight sensor OS# occupancy sensor DS+OS# daylight+occupancy sensor DOS# daylight&occupancy sensor	C custom
		See integrated controls guide for further details	Please specify

● **CONSTRUCTION**

Housing	Extruded Aluminum (0.075" nominal) up to 70% Recycled Content
End Cap	Sheet Steel (18 ga)
Interior Brackets	Die Formed Sheet Steel (18 ga)
Reflectors	White Powder Coated Sheet Steel (22 ga)
Louvers	Die Formed Semi-Specular Aluminum (22 ga)
Blank	Extruded Aluminum (0.075" nominal)
Lenses	Extruded Acrylic (0.070" nominal) Satin: 68% trans. Frosted: 85% trans.

● **WEIGHT**

4 ft	12.3 lbs / 5.0 kg
8 ft	24.6 lbs / 10.1 kg
12 ft	36.9 lbs / 15.1 kg

● **SYSTEM (S#)**

BEAM 3 linear systems, with the use of a strong profile, allow for a nearly hair thin connection system of continuous runs. Lengths of 4', 8', 12' as well as custom lengths are available. Runs of BEAM 3 that are greater than 12' in length are designated as systems (S#). This means that the run is comprised of a combination 4', 8' and/or 12' sections to be assembled on site using our joining system. For more information on systems and joining, please refer to the BEAM installation sheets available for download at www.axislighting.com.

● **ELECTRICAL**


Ballast	Electronic IS, Electronic Rapid Start, Dimming (0-10V, Line, EcoSystem, DALI), BI-level dimming With preinstalled ballast disconnect as per NEC & CEC
Emergency	Emergency battery pack or emergency circuit
Voltage	120V, 277V, 347V, UNV

i Incorporating these components may have limitations or effect the length of the luminaire, please contact factory for more details.

● **FINISH**


Aluminium paint, Powder Coated and custom finishes are also available.

● **APPROVALS**

Certified to UL and CUL standards 
 Meets NYC requirements
 Suitable for damp locations.

● **JOINERS**

In order to allow very long runs of BEAM 3 luminaires, Axis has developed a number of different joining systems. Special care has been taken to maximize the performance of the joiner for each BEAM option.

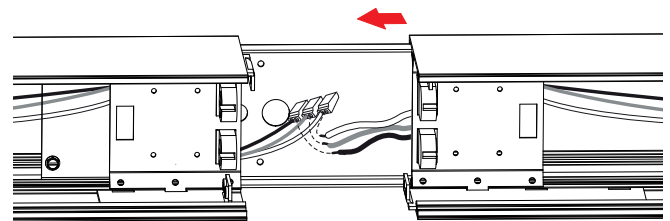


NOTE: Mount each system segment individually. Do not assemble system prior to mounting.

i Allow a minimum of 6" between end of long runs and vertical wall

● **STAGGERED LAMPING**

When BEAM 3 is used in continuous runs longer than 4', staggered lamping can be used to eliminate the appearance of socket shadows at the ends of the lamps. BEAM 3 uses a staggered overlap of 4 different overlapping bracket lengths (3.5", 4", 4.5" and 5"), along with 3' and 4' lamps, allows us to match almost any row length requirements with optimal results. For example 3 x 3' T5 lamps can be used to completely illuminate the lens of an 8' luminaire.

LAMP TYPE	T5	T5HO
1 lamp	●	●




● **OPTICS**

Satin & Frosted Lens - (acrylic snap-in lens)


satin: 68% trans.
 frosted: 85% trans.

Semi-spec. parabolic louver


9/16" deep blades – 5/8" spacing
 72 blades per 4'



S satin lens



F frosted lens




PL semi-specular parabolic louvers


● **CORNERS**

Unlit Corners - BEAM3


features a multitude of layout patterns with the use of a number of corners, 90° corner, T or X junctions.




90° unlit corner



90° corner




X junction



T junction

Lit Corners - In addition Axis offers Lit 90° Corners including Ceiling to Ceiling, Wall to Ceiling and Ceiling to Wall.



wall to ceiling lit corner

● **MR16**


Blank MR16 Halogens MR16 LED Quantity

Extruded Aluminum (0.075" nominal)
 2.0" diameter (35W / 50W)
 2.0" diameter

For every 4' fluorescent lamp section, there may be up to a maximum of 4 x MR16 lamps.

Spacing


Each MR16 is placed centered on a blank section 9" in length.




For a series of MR16's within a given section length, they will be spaced evenly on a longer blank section. The directed light of MR16 Halogen lamps are fixed downward.

Custom spacing may be available on special request. *Please consult factory


Between fluorescent lamps sections

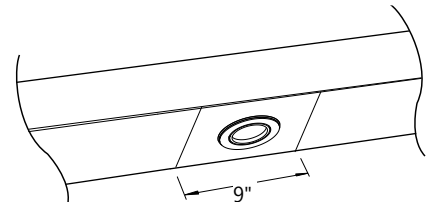


At luminaire ends

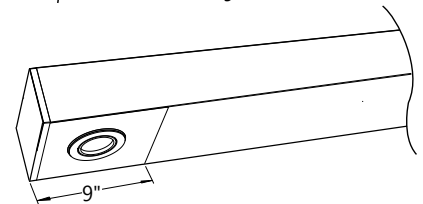


Several in a long blank section

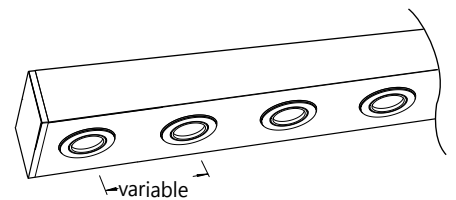


● MOUNTING OPTIONS

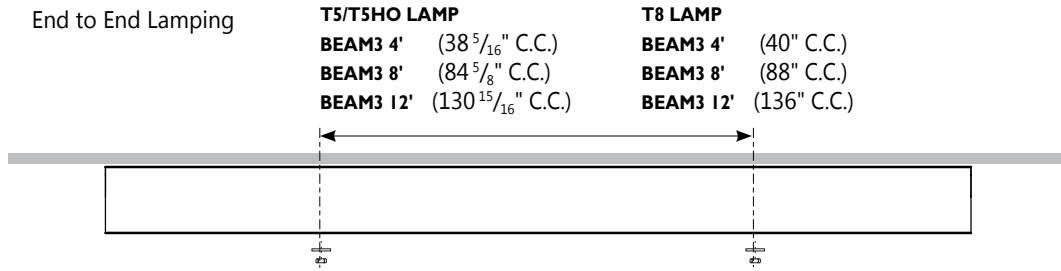


● MOUNTING DETAILS

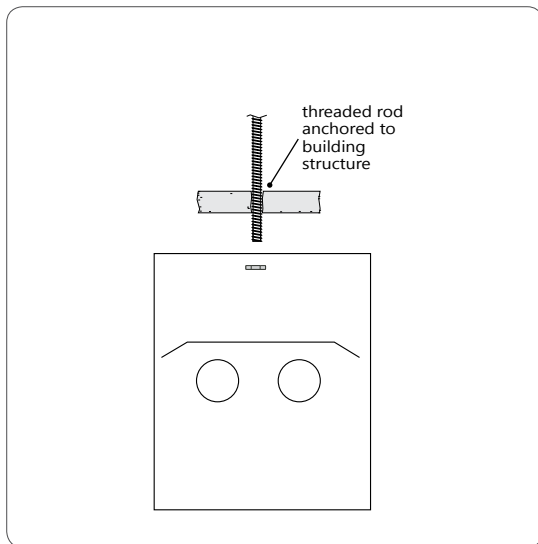

S SURFACE MOUNT DRYWALL CEILING

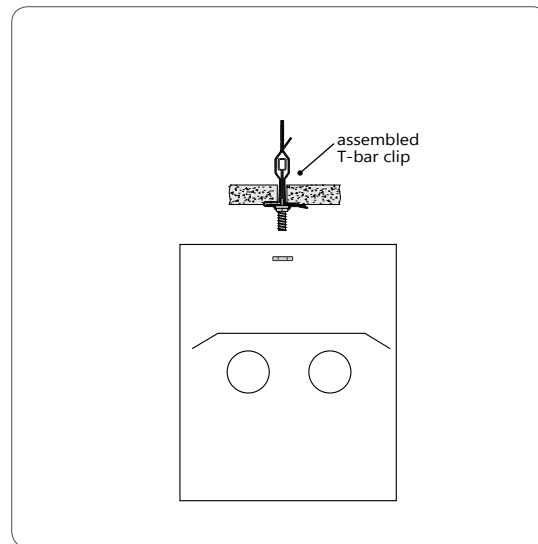

SB SURFACE MOUNT T-BAR CEILING

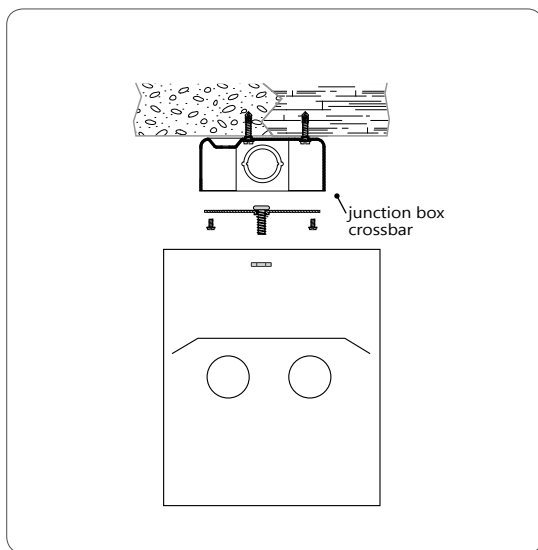

SC SURFACE MOUNT SOLID CEILING


● OTHER MOUNTING OPTIONS

BEAM 3 is also available with recessed, pendant, wall, asymmetric, recessed wall and wall wash mounted options.

i Specification sheets and Installation sheets for all mounting for BEAM luminaires are available for download at www.axislighting.com

● **INTEGRATED CONTROL OPTIONS**

BEAM 3 luminaires allow the use of integrated controls such as daylight sensors (DS), occupancy sensors (OS) and combination daylight/occupancy sensors (DOS). These options can be seamlessly integrated into our luminaires. The control system could be used to optimize the lighting of the space by reducing energy consumption through daylight harvesting and occupancy, thereby improving the overall interior environment and allowing for LEED credits.

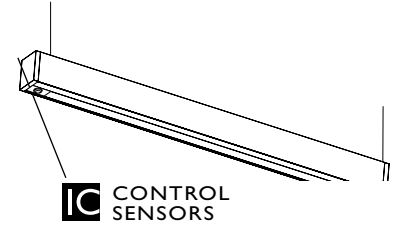


- Consult factory for other options.


SENSORS	BRAND	Model	TYPE	CODE	COMPATIBLE DIMMING BALLAST
Daylight Sensor (DS)	Lutron	EC-DIR-WH	Daylight	LD	EcoSystem
	Wattstopper	FD-301	Daylight	WD	0-10V
	Philips	Luxsense	Daylight	PL	0-10V
Occupancy Sensor (OS)	Wattstopper	FS-205	PIR Occupancy	WP1	Programmed Rapid Start
		FS-355	PIR Occupancy	WP2	Programmed Rapid Start
		FM-105	High Frequency Occupancy	WH	Programmed Rapid Start
Daylight & Occupancy Sensors (DOS)	Philips	Actilume	Daylight & PIR Occupancy	PA	DALI or 0-10V

● **PHOTOMETRIC DATA**

I T5



PHOTOMETRIC CURVE



Test Lamp: IxF28T5
 IES FILE: BMD-F-4-T5-1

Efficiency: 68.4 %

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	875	875	875	875	875	
5	872	876	864	870	861	47
15	818	826	808	806	801	195
25	726	713	706	685	690	306
35	596	591	572	555	551	356
45	465	455	440	421	421	349
55	337	329	315	303	296	300
65	218	218	205	197	194	226
75	124	119	116	108	105	142
85	42	40	36	33	32	60
90	5	4	3	2	2	

LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	5775	3083	2556
55	4986	2256	1794
65	4154	1551	1212
75	3435	955	694
85	2280	339	230


COEFFICIENTS OF UTILIZATION (%)

Ceiling	80			70			50				
	70	50	30	10	70	50	30	10	50	30	10
Wall	70	50	30	10	70	50	30	10	50	30	10
0	82	82	82	82	80	80	80	80	76	76	76
1	75	72	69	66	73	70	68	65	67	65	63
2	68	63	59	55	67	62	58	54	59	56	53
3	63	56	50	46	61	55	50	46	53	48	45
4	58	50	44	40	56	49	43	39	47	42	39
5	53	45	39	34	52	44	38	34	43	38	34
6	49	41	35	30	48	40	34	30	39	34	30
7	46	37	31	27	45	36	31	27	35	30	27
8	43	34	28	24	42	33	28	24	33	28	24
9	40	31	26	22	39	31	26	22	30	25	22
10	38	29	24	20	37	29	24	20	28	23	20


Based on floor reflectance of 20

● PHOTOMETRIC DATA

2 T5



PHOTOMETRIC CURVE



Test Lamp: 2xF28T5
 IES FILE: BMD-F-4-T5-2
Efficiency: 62.5%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	1643	1643	1643	1643	1643	
5	1615	1597	1599	1596	1621	86
15	1520	1506	1496	1495	1479	362
25	1342	1319	1291	1270	1241	563
35	1110	1081	1046	1004	1001	652
45	855	843	795	773	758	638
55	613	604	572	542	531	545
65	405	399	373	357	350	411
75	223	221	206	196	192	258
85	78	72	65	58	58	109
90	10	7	5	3	3	

COEFFICIENTS OF UTILIZATION (%)


Ceiling	80			70			50				
	70	50	30	10	70	50	30	10	50	30	10
Wall	70	50	30	10	70	50	30	10	50	30	10
0	75	75	75	75	73	73	73	73	70	70	70
1	68	66	63	61	67	64	62	60	62	60	58
2	63	58	54	50	61	56	53	50	54	51	48
3	57	51	46	42	56	50	46	42	48	44	41
4	53	46	40	36	51	45	40	36	43	39	36
5	49	41	36	32	47	40	35	31	39	35	31
6	45	37	32	28	44	37	31	28	35	31	27
7	42	34	29	25	41	33	28	25	32	28	25
8	39	31	26	22	38	31	26	22	30	25	22
9	37	29	24	20	36	28	23	20	28	23	20
10	35	27	22	19	34	26	22	18	26	21	18

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	10617	5573	4605
55	9079	4095	3214
65	7712	2817	2182
75	6199	1700	1269
85	4294	616	421

1 T5



PHOTOMETRIC CURVE



Test Lamp: 1xF28T5
 IES FILE: BMD-S-4-T5-1
Efficiency: 61.4%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	617	617	617	617	617	
5	599	613	611	602	602	33
15	587	574	585	577	580	139
25	543	537	539	535	536	230
35	487	484	481	475	478	292
45	417	411	408	404	403	315
55	335	326	324	320	319	300
65	235	232	229	227	225	246
75	132	132	130	128	127	160
85	42	41	38	35	33	65
90	5	4	3	2	2	

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80			70			50				
	70	50	30	10	70	50	30	10	50	30	10
Wall	70	50	30	10	70	50	30	10	50	30	10
0	73	73	73	73	72	72	72	72	68	68	68
1	67	64	61	58	65	62	60	58	60	58	56
2	61	55	51	47	59	54	50	47	52	49	46
3	55	48	43	39	54	47	43	39	46	41	38
4	50	43	37	33	49	42	37	33	40	36	32
5	46	38	33	28	45	37	32	28	36	31	28
6	43	34	29	25	41	34	28	25	33	28	24
7	40	31	26	22	38	31	25	22	30	25	22
8	37	28	23	19	36	28	23	19	27	22	19
9	34	26	21	17	34	26	21	17	25	20	17
10	32	24	19	16	31	24	19	16	23	19	16

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	5183	2856	2450
55	4954	2317	1930
65	4466	1731	1404
75	3660	1071	839
85	2301	362	245


i All IES files for other lamping are available for download at: www.axislighting.com

● PHOTOMETRIC DATA

1 T5HO



PHOTOMETRIC CURVE



Test Lamp: 1xF54T5HO
 IES FILE: BMD-F-4-T5HO-1

Efficiency: 68.4%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	1513	1513	1513	1513	1513	
5	1510	1516	1496	1499	1493	81
15	1432	1397	1388	1391	1384	337
25	1242	1230	1210	1186	1190	527
35	1028	1015	984	957	960	614
45	802	785	757	735	722	603
55	583	565	545	516	512	517
65	381	374	358	342	337	390
75	210	206	198	186	181	244
85	75	69	61	57	53	104
90	10	7	5	3	3	

COEFFICIENTS OF UTILIZATION (%)


Ceiling	80			70			50				
	70	50	30	10	70	50	30	10	50	30	10
Wall	70	50	30	10	70	50	30	10	50	30	10
0	82	82	82	82	80	80	80	80	76	76	76
1	75	72	69	66	73	70	68	65	67	65	63
2	68	63	59	55	67	62	58	54	59	56	53
3	63	56	50	46	61	55	50	46	53	48	45
4	58	50	44	40	56	49	43	39	47	42	39
5	53	45	39	34	52	44	38	34	43	38	34
6	49	41	35	30	48	40	34	30	39	34	30
7	46	37	31	27	45	36	31	27	35	30	27
8	43	34	28	24	42	33	28	24	33	28	24
9	40	31	26	22	39	31	26	22	30	25	22
10	38	29	24	20	37	29	23	20	28	23	20

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	9964	5307	4383
55	8628	3900	3101
65	7241	2703	2100
75	5848	1634	1197
85	4078	580	387

2 T5HO



PHOTOMETRIC CURVE



Test Lamp: 2xF54T5HO
 IES FILE: BMD-F-4-T5HO-2

Efficiency: 62.5%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	2831	2831	2831	2831	2831	
5	2753	2769	2722	2834	2761	149
15	2606	2594	2557	2558	2552	620
25	2297	2277	2211	2183	2142	968
35	1901	1882	1802	1740	1740	1127
45	1495	1455	1384	1321	1313	1103
55	1059	1039	983	941	908	938
65	706	681	649	606	599	707
75	390	376	361	340	334	445
85	135	129	111	102	97	189
90	18	13	8	5	5	

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80			70			50				
	70	50	30	10	70	50	30	10	50	30	10
Wall	70	50	30	10	70	50	30	10	50	30	10
0	75	75	75	75	73	73	73	73	70	70	70
1	68	66	63	61	67	64	62	60	62	60	58
2	63	58	54	50	61	56	53	50	54	51	48
3	57	51	46	42	56	50	46	42	48	44	41
4	53	46	40	36	51	45	40	36	43	39	36
5	49	41	36	32	47	40	35	31	39	35	31
6	45	37	32	28	44	37	31	28	35	31	27
7	42	34	29	25	41	33	28	25	32	28	25
8	39	31	26	22	38	31	26	22	30	25	22
9	37	29	24	20	36	28	23	20	28	23	20
10	35	27	22	18	34	26	22	18	26	21	18

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	18569	9700	7973
55	15670	7042	5498
65	13431	4904	3732
75	10844	2982	2210
85	7402	1050	709


i All IES files for other lamping are available for download at: www.axislighting.com

● PHOTOMETRIC DATA

I T5HO



PHOTOMETRIC CURVE



Test Lamp: IxF54T5HO

IES FILE: BMD-S-4-T5HO-1

Efficiency: 61.4%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	1064	1064	1064	1064	1064	
5	1026	1030	1045	1050	1035	56
15	1005	993	1005	993	987	239
25	932	933	930	926	929	396
35	850	834	830	817	822	503
45	712	710	701	696	698	542
55	567	563	558	557	552	516
65	406	399	393	390	387	424
75	234	226	224	220	219	277
85	73	72	64	61	58	112
90	9	7	5	4	3	

COEFFICIENTS OF UTILIZATION (%)


Ceiling	80			70			50				
	70	50	30	10	70	50	30	10	50	30	10
Wall	70	50	30	10	70	50	30	10	50	30	10
0	73	73	73	73	72	72	72	72	68	68	68
1	67	64	61	58	65	62	60	58	60	58	56
2	60	55	51	47	59	54	50	47	52	49	46
3	55	48	43	39	53	47	43	39	46	41	38
4	50	43	37	33	49	42	37	33	40	36	32
5	46	38	33	28	45	37	32	28	36	31	28
6	43	34	29	25	41	34	28	25	33	28	24
7	40	31	26	22	38	31	25	22	30	25	22
8	37	28	23	19	36	28	23	19	27	22	19
9	34	26	21	17	33	26	21	17	25	20	17
10	32	24	19	16	31	24	19	16	23	19	16

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	8840	4911	4235
55	8390	3994	3342
65	7719	2971	2409
75	6506	1848	1452
85	3993	602	424

I T8



PHOTOMETRIC CURVE



Test Lamp: IxF32T8

IES FILE: BMD-F-4-T8-1

Efficiency: 64.6%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	838	838	838	838	838	
5	815	814	812	814	811	44
15	767	765	761	754	762	184
25	677	674	661	651	641	288
35	566	554	543	526	523	337
45	441	431	416	403	398	331
55	320	310	299	286	282	284
65	210	205	197	187	187	214
75	117	114	108	105	102	135
85	40	39	34	31	30	57
90	5	4	3	2	2	

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80			70			50				
	70	50	30	10	70	50	30	10	50	30	10
Wall	70	50	30	10	70	50	30	10	50	30	10
0	77	77	77	77	75	75	75	75	72	72	72
1	71	68	65	63	69	66	64	62	64	62	60
2	65	60	55	52	63	58	54	51	56	53	50
3	59	53	48	44	58	52	47	43	50	46	42
4	54	47	42	37	53	46	41	37	45	40	37
5	50	42	37	32	49	42	36	32	40	36	32
6	47	38	33	29	45	38	32	28	37	32	28
7	43	35	29	25	42	34	29	25	33	29	25
8	40	32	27	23	39	32	26	23	31	26	23
9	38	29	24	21	37	29	24	21	28	24	21
10	36	27	22	19	35	27	22	19	26	22	19

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	5449	2904	2406
55	4718	2129	1697
65	3972	1478	1157
75	3234	887	670
85	2198	323	218


i All IES files for other lamping are available for download at: www.axislighting.com

● PHOTOMETRIC DATA

I T8



PHOTOMETRIC CURVE



Test Lamp: IxF32T8

IES FILE: BMD-S-4-T8-1

Efficiency: 57.4%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	567	567	567	567	567	
5	552	563	564	566	569	30
15	543	544	538	538	541	129
25	502	507	497	500	501	215
35	457	454	449	444	445	272
45	386	383	379	379	377	294
55	309	307	302	301	300	280
65	219	218	213	213	209	230
75	125	122	122	120	118	151
85	39	38	35	32	32	61
90	5	4	3	2	1	

LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	4771	2643	2279
55	4547	2155	1807
65	4150	1600	1298
75	3473	1005	779
85	2137	331	235

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80			70			50				
	70	50	30	10	70	50	30	10	50	30	10
Wall	70	50	30	10	70	50	30	10	50	30	10
0	69	69	69	69	67	67	67	67	64	64	64
1	62	59	57	55	61	58	56	54	56	54	52
2	57	52	48	44	55	51	47	44	48	45	43
3	51	45	40	37	50	44	40	36	43	39	36
4	47	40	35	31	46	39	34	31	38	34	30
5	43	36	30	26	42	35	30	26	34	29	26
6	40	32	27	23	39	31	27	23	30	26	23
7	37	29	24	20	36	29	24	20	28	23	20
8	34	26	22	18	33	26	21	18	25	21	18
9	32	24	19	16	31	24	19	16	23	19	16
10	30	22	18	15	29	22	18	15	22	17	15

Based on floor reflectance of 20

i All IES files for other lamping are available for download at: www.axislighting.com