



Project _____


Type _____

Notes _____

PERFORMANCE PER LINEAR FOOT AT 4000K

NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY
400 lm/ft	3.6 W/ft	111 lm/W
500 lm/ft	4.7 W/ft	106 lm/W
750 lm/ft	7.5 W/ft	100 lm/W
1000 lm/ft	10.4 W/ft	96 lm/W

* Based on a 4 foot luminaire using one driver
Please consult factory for custom lumen output and wattage.

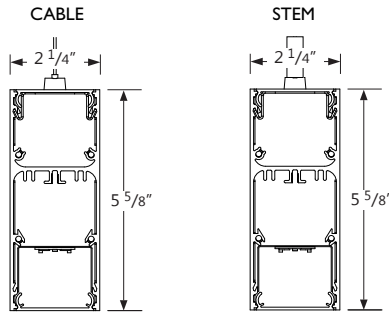

Ordering Guide

TBDLED				SO			
PRODUCT ID		NOM. LUMENS/FT	CRI	COLOR TEMP.	SHIELDING	LENGTH (FT)	MR (OPTIONAL)
TBDLED	Pendant Direct LED	400 400 lm/ft	80 80 CRI	27 2700 K	SO spotless lens	2 2'	M11LED(#) MR11 LED
		500 500 lm/ft	90 90 CRI	30 3000 K			
		750 750 lm/ft		35 3500 K			
		1000 1000 lm/ft		40 4000 K			
		Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.					Add 6" per lamp, Specify quantity Separate circuits included Requires 120V or 277V

FINISH	VOLTAGE	DRIVER	CIRCUITS	MOUNTING/SUSPENSION
AP aluminum paint	120 120 V	DP dimming (0-10V) 1%	1 1 circuit	CA(#) drywall+cable length (36" std.)
W white	277 277 V	D dimming (0-10V) 5% 347V standard (2)	2 2 circuits	CT9(#) TB/TG 9/16+cable length (36" std.)
BLK black	347 347 V (1)	LT Lutron (3)	+E(#) emergency circuit (5)	CT15(#) TB/TG15/16+cable length (36" std.)
C custom	UNV universal	BI bi-level dimming	+NL(#) night light circuit (5)	CTS(#) ST+cable length (36" std.)
		O other (4)	+GTD(#) generator transfer device (5)	SA(#) drywall+stem length >48" (18" std.)
	(1) D dimming (0-10V) 5% standard	(2) For 347V only (3) Specify system (4) Please consult factory; see page 2	(5) Specify quantity	See ceiling mounting guide for further details

BATTERY (OPTIONAL)	OTHER (OPTIONAL)	IC CONTROLS (OPTIONAL)	CUSTOM (OPTIONAL)
B# battery pack (integral)	F fuse (6) D dust cover	DS# daylight sensor OS# occupancy sensor DOS# daylight & occupancy sensor EN# Enlighted integral (7) ENR# Enlighted remote (7)	C custom
Requires 120V or 277V Please consult factory	(6) Requires 120V or 277V	(7) Please consult factory Specify quantity. Requires 8" blank. See pages 4-5 for more details.	Please specify

● CONSTRUCTION

Housing	Extruded aluminum (0.075" nominal) Up to 70% Recycled Content
End Cap	Sheet steel (18 gauge)
Interior Brackets	Die formed sheet steel (20 gauge)
Reflectors	White powder coated sheet steel (22 gauge)
Louvers	Die formed semi-specular aluminum (22 gauge)
Lenses	Extruded acrylic (0.070" nominal) Satin: 68% trans. frosted: 85% trans.
Hanger	Die formed sheet steel (16 gauge)
Suspension	Aircraft cable or Ø 1/2" stem
Cable Grips	Quick connecting / release

● ELECTRICAL

Lutron driver	L3D - Hi-Lume A-Series EcoSystem 3-Wire Control (1%) LDE1 - EcoSystem H-Series (1%) LDE5 - EcoSystem 5-Series (5%) LTE - Hi-Lume® A-series 2Wires Forward Phase (1%)
Other drivers	DALI - Digital Addressable Lighting Interface DMX - Digital Multiplex LV - line voltage - Advance Mark 10 Xitanium SR - For wireless sensor
Emergency	Integral emergency battery pack or emergency circuit optional.
Input Voltage	120V, 277V, 347V, UNV.

i Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.


● WARRANTY

Axis Lighting will warrant defective LEDs, boards, and drivers for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specifications. If defective, Axis will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Axis.

● WEIGHT

Pendant Direct 4 ft	13.2 lbs / 6.0 kg
Pendant Direct 8 ft	26.4 lbs / 12.0 kg
Pendant Direct 12 ft	39.6 lbs / 18.0 kg

● OPTICS



50 spotless lens

SPOTLESS LENS

Frosted acrylic snap-in lens with micro lens


● SYSTEM (S#)

TWIN BEAM2 LED linear systems, with the use of a strong profile, allow for a nearly hair thin connection system of continuous runs. Lengths of 4', 8', 12' as well as custom lengths are available. Runs of TWIN BEAM2 LED that are greater than 12' in length are designated as systems (S#). This means that the run is comprised of a combination of 4', 8' and/or 12' sections to be assembled on site using our joining system. For more information on systems and joining, please refer to the TWIN BEAM2 LED installation sheets available for download at www.axislighting.com.

● JOINERS

In order to allow very long runs of TWIN BEAM2 LED luminaires, Axis has developed an effective joining system. Special care has been taken to maximize the performance of the joiner for each BEAM option.


NOTE: Mount each system segment individually. Do not assemble system prior to mounting.

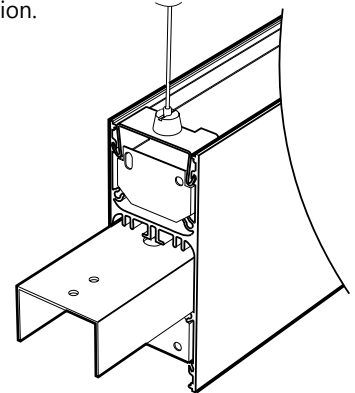


i Allow a minimum of 6" between end of long runs and vertical wall

● CORNERS

Unlit Corners - TWIN BEAM2 LED features a multitude of layout patterns with the use of a number of corners, 90° corner, T or X junctions.

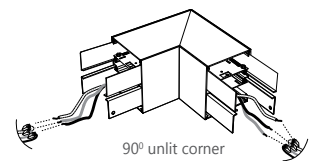

90° unlit corner

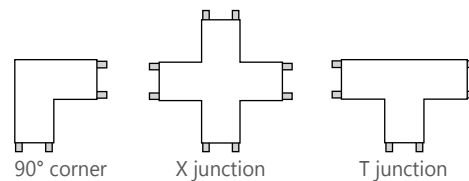


90° corner

X junction

T junction

Lit Corners - In addition Axis offers Lit 90° corners including ceiling to ceiling, wall to ceiling and ceiling to wall.

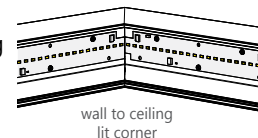


wall to ceiling lit corner


i For custom corner angles, please consult factory. Specifications sheets for all corners are available at: www.axislighting.com

● MOUNTING OPTIONS

CT TILE CEILING - ON GRID

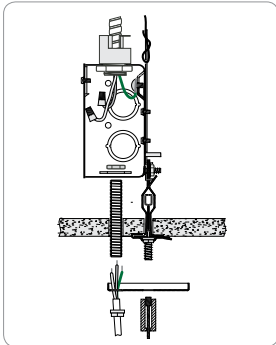


Power feed




Non power feed

CA DRYWALL CEILING

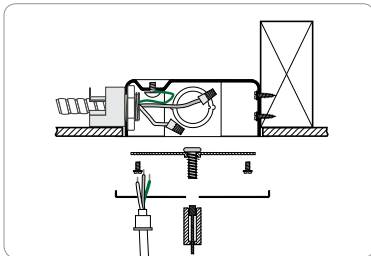


Power feed

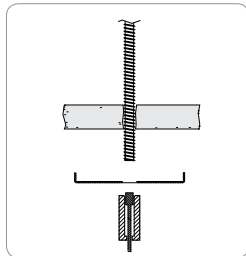


Non power feed

SA STEM MOUNT IN DRYWALL CEILING

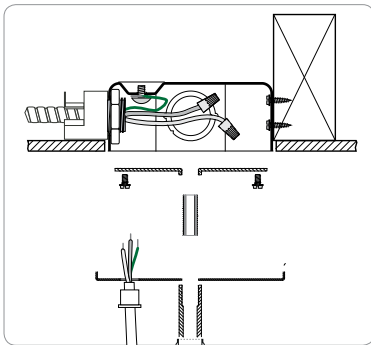

Power feed

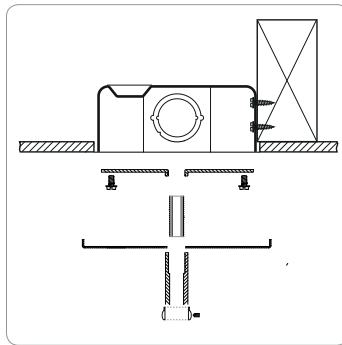

Non power feed

● OTHER MOUNTING OPTIONS

TWIN BEAM2 LED is also available with wall and vertical wall mounted options.

i Specification sheets and installation sheets for all mountings for BEAM luminaires are available for download at www.axislighting.com

● FINISH

Aluminum paint, powder coated and custom finishes are also available.

● APPROVALS

Certified to UL and CUL standards
Meets NYC requirements
Meets ADA requirements.
Suitable for damp locations.




● MR11 LED LAMPS

Blank MR11 LED Quantity


Extruded aluminum (0.075" nominal)
1.4" diameter
For every 4' section, there may be up to a maximum of 4 x MR11 LED lamps.

Spacing


Each MR11 LED lamp is placed centered on a blank section 6" in length.
For a series of MR11's within a given section length, they will be spaced evenly on a longer blank section.
The directed light of MR11 LED lamps are fixed downward.
Custom spacing may be available on special request.




Between sections

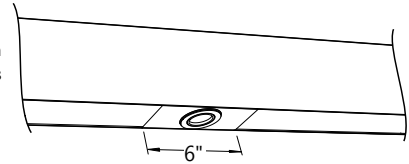

At luminaire ends

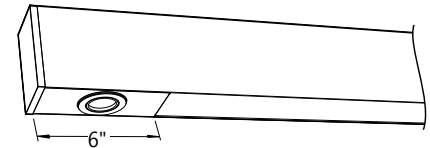

Several in a long blank section

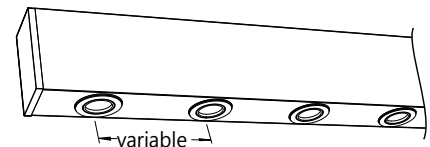


Beam Angle	45 nominal degrees
Input Watts	3W
Nominal Lumens	50 lumens
Efficacy	17 lumens per watt
Color Rendering Index (CRI)	80
Life	25,000 hours at L ₇₀
Correlated color temperature (CCT)	2700K

i More options are available upon request. Please consult factory.

● INTEGRATED CONTROLS

TWIN BEAM2 LED luminaires allow the use of integrated controls such as daylight sensors (DS), occupancy sensors (OS) and combination daylight/occupancy sensors (DOS). These options can be seamlessly integrated into our luminaires. The control system could be used to optimize the lighting of the space by reducing energy consumption through daylight harvesting and occupancy, thereby improving the overall interior environment and allowing for LEED credits.


- Consult factory for other options.

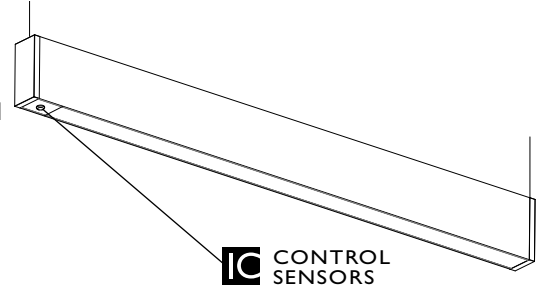

The integrated control systems offered are:

● DAYLIGHT HARVESTING (DS):


With Daylight sensors, maximum lamp output is reduced according to the available amount of natural light. By reducing maximum lamp output, energy consumption is reduced by up to 20 percent in a process known as "Daylight Harvesting".



Shown with Luxsense
EC-DIR-WH, FD-301
Luxsense, Micro Luxsense

● OCCUPANCY (OS):


When a room is vacated, occupancy sensors ensure the light will be turned off after a programmed delay as well as ensuring that light remains on while the room is occupied.

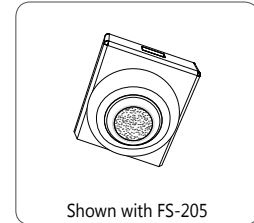

Shown with FS-205
FS-205, FS-355,
FS-155 - Line Voltage
FS-505, FS-505C

● DAYLIGHT HARVESTING AND OCCUPANCY (DOS):


ACTILUME, a combination of Daylight & Occupancy sensor from Philips, along with a 0-10V or DALI driver can be used in one form factor.

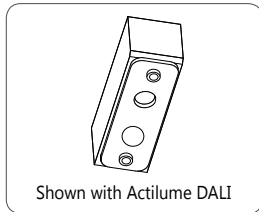

Shown with Actilume DALI
Actilume 1-10V
Actilume DALI


● ENLIGHTED INTEGRAL (EN) / ENLIGHTED REMOTE (ENR):

A combination of Daylight, Occupancy & Temperature autonomously control illumination levels, monitor occupancy and environmental conditions. Data is transmitted wirelessly to the Enlighted networked management system.

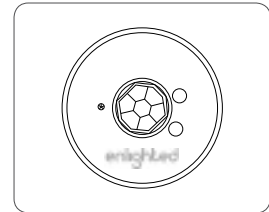

● INSTALLATION EXAMPLE

Sensor location option

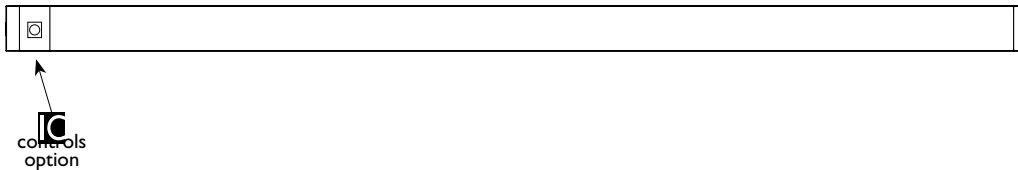


* Incorporating IC controls may affect the length of the luminaire, please contact factory for more details.

● INTEGRATED CONTROL OPTIONS


SENSORS	BRAND	Model	TYPE
Daylight Sensor (DS)	Lutron	EC-DIR-WH	Daylight, IR
	Wattstopper	FD-301	Daylight
	Philips	Luxsense, LR1220/00	Daylight
	Philips	Micro Luxsense	Daylight
	Wattstopper	LS-102	Light Saver (Ambient light level)
Occupancy Sensor (OS)	Wattstopper	FS-205v2	PIR Occupancy & Ambient light level
	Wattstopper	FS-355 (need lenses)	PIR Occupancy & Ambient light level
	Wattstopper	FS-155	PIR Occupancy & Ambient light level
	Wattstopper	FS-505	Ultrasonic Occupancy (Staircase)
	Wattstopper	FS-505C	Ultrasonic Occupancy (Open Area)
	Wattstopper	FM-105	High Frequency Occupancy (Wet)
	Lutron TriPak Wireless	LRF2-OCR2B-P-WH	PIR Occupancy
	Lutron	LOS-CDT	Ultrasonic Occupancy + PIR
	Lutron	LOS-CIR	PIR Occupancy
Daylight & Occupancy Sensors (DOS)	Philips	Actilume, LR11655	Daylight & PIR Occupancy
	Wattstopper	FS-305 (need Lenses)	PIR Occupancy
	Wattstopper	FS-305 RC	PIR Occupancy & Ambient light level
	Creston	GLS Series	Daylight and/or PIR Occupancy
	Echoflex	MOS Series	Daylight and/or PIR Occupancy
Enlighted sensor (EN, ENR)	Enlighted integral / remote	SU-3E-00	Daylight, Occupancy & Temperature

● PHOTOMETRIC DATA

400 lm/ft



PHOTOMETRIC CURVE

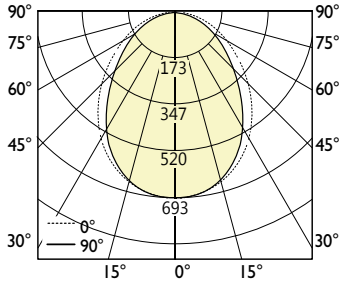

Luminaire Lumens: 400 lm/ft
Input Watts: 3.6 W/ft
Efficacy: 111 lm/W
 IES FILE: TBDLED-400-80-40-SO.IES

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	691	691	691	691	691
5	684	687	684	689	691
15	653	656	651	649	651
25	591	589	576	567	563
35	499	492	469	448	440
45	387	377	348	324	315
55	269	260	236	216	208
65	164	157	143	129	124
75	77	76	68	61	59
85	17	15	16	15	15
90	0	0	0	0	0


ZONAL LUMENS

Zone	Lumens
0	
0-10	65
10-20	184
20-30	265
30-40	293
40-50	270
50-60	213
60-70	143
70-80	73
80-90	18
90	


LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	8552	7697	6960
55	7344	6435	5672
65	6069	5280	4589
75	4673	4109	3545
85	3110	2871	2632

500 lm/ft



PHOTOMETRIC CURVE

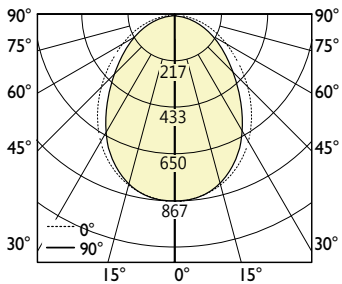

Luminaire Lumens: 500 lm/ft
Input Watts: 4.7 W/ft
Efficacy: 106 lm/W
 IES FILE: TBDLED-500-80-40-SO.IES

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	863	863	863	863	863
5	855	858	855	862	863
15	817	820	813	812	813
25	738	737	720	708	703
35	623	615	587	560	550
45	483	472	435	405	393
55	337	325	295	270	260
65	205	197	178	162	155
75	97	95	85	77	73
85	22	18	20	18	18
90	0	0	0	0	0

ZONAL LUMENS


Zone	Lumens
0	
0-10	81
10-20	229
20-30	331
30-40	367
40-50	337
50-60	266
60-70	178
70-80	92
80-90	23
90	

LUMINANCE DATA (cd/m²)


Vertical Angle	Horizontal Angles		
	0	45	90
45	10690	9620	8700
55	9180	8044	7089
65	7586	6599	5736
75	5841	5136	4431
85	3888	3589	3290

● PHOTOMETRIC DATA

750 lm/ft



PHOTOMETRIC CURVE

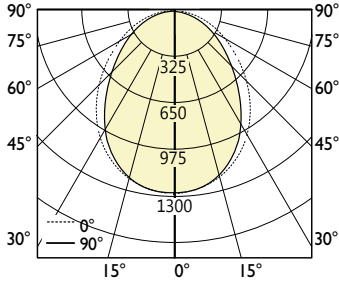

Luminaire Lumens: 750 lm/ft
Input Watts: 7.5 W/ft
Efficacy: 100 lm/W
 IES FILE: TBDLED-750-80-40-SO.IES

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	1295	1295	1295	1295	1295
5	1283	1288	1283	1293	1295
15	1225	1230	1220	1218	1220
25	1108	1105	1080	1063	1055
35	935	923	880	840	825
45	725	708	653	608	590
55	505	488	443	405	390
65	308	295	268	243	233
75	145	143	128	115	110
85	33	28	30	28	28
90	0	0	0	0	0


ZONAL LUMENS

Zone	Lumens
0	
0-10	122
10-20	344
20-30	497
30-40	550
40-50	506
50-60	399
60-70	268
70-80	138
80-90	34
90	


LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	16035	14432	13050
55	13770	12066	10634
65	11380	9899	8604
75	8762	7704	6647
85	5832	5383	4935

1000 lm/ft



PHOTOMETRIC CURVE

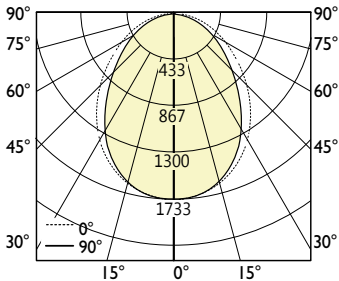

Luminaire Lumens: 1000 lm/ft
Input Watts: 10.5 W/ft
Efficacy: 96 lm/W
 IES FILE: TBDLED-1000-80-40-SO.IES

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	1727	1727	1727	1727	1727
5	1710	1717	1710	1723	1727
15	1633	1640	1627	1623	1627
25	1477	1473	1440	1417	1407
35	1247	1230	1173	1120	1100
45	967	943	870	810	787
55	673	650	590	540	520
65	410	393	357	323	310
75	193	190	170	153	147
85	43	37	40	37	37
90	0	0	0	0	0

ZONAL LUMENS

Zone	Lumens
0	
0-10	163
10-20	459
20-30	663
30-40	733
40-50	675
50-60	533
60-70	357
70-80	183
80-90	46
90	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	21381	19243	17399
55	18360	16087	14179
65	15173	13199	11472
75	11683	10273	8863
85	7776	7178	6580