

Project:

Type:

Quantity:

Note:

SKU#: GDM-32P- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

## Description

Making the most of what isn't there is what Geodome is all about. Constructed negative space gives a nod to the traditional shade form whilst making a statement all its own. Illumination via screw-in bulb or integrated, highly-efficient LEDs.

## Features


- Available in contrasting polished chrome with white interior or black with white interior
- Stainless steel construction
- Available with standard E26 socket (lamp not provided) or integrated LED light kit
- Suspends 12' from the ceiling with a black power cord and an aircraft suspension cable
- Comes comes knocked down with 12 stamped stainless steel sections that screw together in the field
- Damp location rated

## Specifications

- Color Rendering Index: (90CRI for LED light kit)
- LED Color Temperature: (3000K for LED light kit)
- Input Voltage: 120-220VAC 50/60Hz (120-277VAC for integrated LED light kit option)
- Dimming: No dimming options for E26 socket.
- Integrated LED light kit comes with universal dimming (TRIAC/ ELV/ 0-10V)
- For recommended dimmers and downloadable IES & LM 79 files, see [blackjacklighting.com](http://blackjacklighting.com)

## Custom

- Available integrated LED light kit; includes 120-277VAC driver with universal Dimming (TRIAC/ ELV/0-10V)
- Integrated LED light kit (standard in 3000K) upgradable to 4000K/ 90CRI

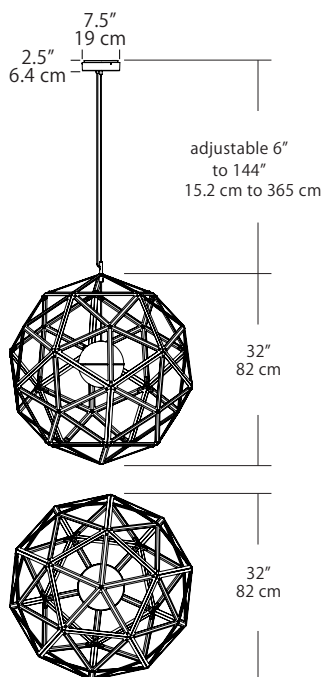

## ORDERING GUIDE

Family      Size/Type      Finish

GDM

32P

PW Chrome exterior/  
White interior  
BW Black exterior/  
White interior

Example: GDM-32P-PW-27U-30K

## CUSTOM OPTIONS

Volts/Dimming      Color Temp.

12E

NAK

12E 120VAC,  
E26 Screw-In Socket  
27U 120-277VAC,  
Universal Dimming  
Integrated Light Kit  
(12E Standard)

NAK E26 Screw-In  
Socket  
30K 3000K  
40K 4000K  
(NAK Standard)