


# 1141AI / 1141BI

PROJECT PROJET

SPEC TYPE

NOTES

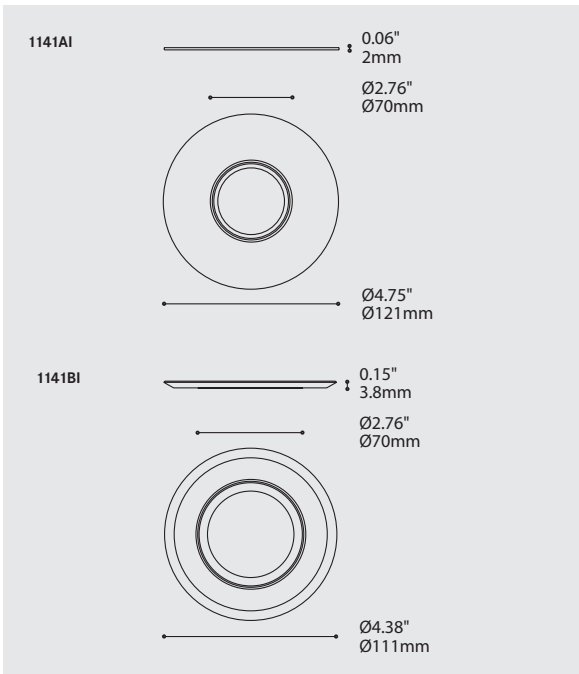

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

This trim is compatible with PAR20 lamp type. A complete unit consists of a trim (A) and a housing (B). Select the appropriate housing below. Accessories (C) are additional options.

### (A) TRIM ORDERING COMMANDE ENCASTRÉ

MODEL	MODÈLE
1141AI	DIRECTIONAL FLAT TRIM
1141BI	DIRECTIONAL BEVELLED TRIM

STRUCTURE FINISH	FINI STRUCTURE
BLK	BLACK
CHR	CHROME
S C	SATIN CHROME
WH	WHITE

### (B) HOUSING ORDERING COMMANDE BOÎTIER

HOUSINGS	BOÎTIERS
Select housing code in matrix below based on light source, voltage options and housing type	

### (C) ACCESSORY ORDERING COMMANDE ACCESSOIRE

ACCESSORIES	ACCESSOIRES
1911A*	FLUSH™ MOUNTING ACCESSORY (FOR 1141AI ONLY)

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

<b>Design:</b>	Family of directional trims with a flush lamp
<b>Light Source:</b>	Dimmable incandescent medium base socket for PAR20 lamps
<b>Installation:</b>	Functions with remodeling, new construction or air-tight insulated ceiling housings (sold separately)
<b>Structure:</b>	Die-stamped and welded 16 GA steel construction with temperature resistant plating or polyester powder coat finish
<b>Certified:</b>	c-UL-us
<b>Conception:</b>	Famille d'encastres directionnels avec lampe au niveau du plafond
<b>Source lumineuse:</b>	Incandescent à intensité variable avec douille moyenne pour lampe PAR20
<b>Installation:</b>	Conçu pour utilisation avec boîtier de type rénovation, nouvelle construction ou plafond hermétique isolé (boîtier vendu séparément)
<b>Structure:</b>	Acier 16 GA embouti et soudé avec placage ou peinture électrostatique résistant à la température
<b>Certifié:</b>	c-UL-us



## HOUSING SELECTION MATRIX MATRICE DE SELECTION DU BOÎTIER

LIGHT SOURCE SOURCE LUMINEUSE	VOLTAGE VOLTAGE	DIMMING OPTION OPTION DE GRADATION	REMODELING RÉNOVATION	NEW INSTALLATION NOUVELLE INSTALLATION	NEW INSTALLATION (AIR RETURN PLENUM) NOUVELLE INSTALLATION (ESPACE A RETOUR D'AIR)	NEW INSTALLATION (INSULATED CEILING + AIR TIGHT) NOUVELLE INSTALLATION (HERMÉTIQUE + PLAFOND ISOLÉ)
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)						
50W, INC, PAR20, MEDIUM BASE	120V		1501C-5.35	1601C-5.35	1711C3-5.35	1811C-5.35