

# CHORO 2014

PROJECT PROJÉT
SPEC TYPE
NOTES



## OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	HAL TRACK I CIRCUIT	INC TRACK I CIRCUIT	INC-HAL
MOUNTING	2734	2734B	2401E
STEM	42.10"	41.45"	41.10"


## MOUNTING OPTIONS OPTIONS DE MONTAGE

2734	2734B	2401E
3.85" x 2.03"	1.46" x 1.36"	Ø4.50" x 1.00"
98 x 52mm	37 x 35mm	Ø114 x 25mm

\* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

## STEM OPTIONS OPTIONS DE TIGE

STEM
STD 36"
914mm

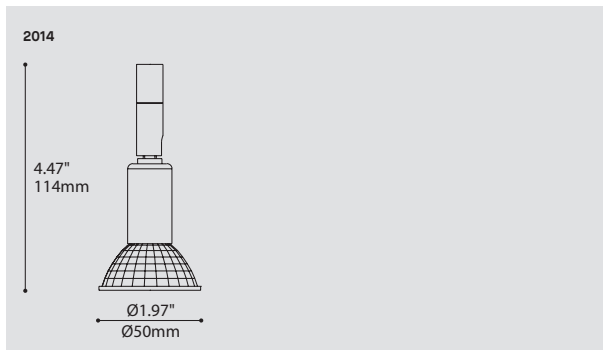

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	CODE
--------------	------

2014	CHORO	2014
------	-------	------

## LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)	
MR16C.50	50W, HAL, MR16C, GU5.3 BASE
GZ10.50	50W, HAL, MR16, GZ10 BASE (120V ONLY)

## VOLTAGE VOLTAGE

120V	120 VOLT
277V*	277 VOLT
	*NOT AVAILABLE WITH A TRACK ADAPTOR

## STEM TIGE

S6	1/4" (6MM) STEM, FIELD ADJUSTABLE
-	NO STEM

## STEM LENGTH LONGUEUR DE TIGE

36	36" STEM (STD LENGTH)
**	CUSTOM STEM LENGTH (PLEASE SPECIFY)*
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

## MOUNTING MONTAGE

RC	ROUND CANOPY / PAVILLON ROND 1.00" CANOPY (2401E)
TA1	TRACK ADAPTOR / ADAPTATEUR DE RAIL* 1 CIRCUIT HAL 120/12V ADAPTOR (2734) GZ10 120V ADAPTOR (2734B)

## MOUNTING OPTION OPTION DE MONTAGE

SCA	SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)
-----	---

## TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL<sup>(A)</sup>

WH	WHITE
BLK	BLACK
M G	METALLIC GRAY
	<sup>(A)</sup> FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY

## STRUCTURE FINISH FINI STRUCTURE<sup>(B)</sup>

BLK	BLACK
CHR	CHROME
S C	SATIN CHROME
WH	WHITE
	<sup>(B)</sup> INCLUDE CANOPY FINISH IF A CANOPY IS SELECTED

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



<b>DESIGN:</b>	Simple yet robust design in an MR16 projector.
<b>LIGHT SOURCE:</b>	MR16 halogen with electronic transformer. Track adaptor available.
<b>STRUCTURE:</b>	Die-formed steel with machined brass & spring swivel. Available in four plated or painted finishes.
<b>CERTIFIED:</b>	c-CSA-us, c-UL-us
<b>CONCEPTION:</b>	Projecteur MR16 simple et robuste.
<b>SOURCE LUMINEUSE:</b>	Halogène MR16 avec transformateur électronique. Système de rails offert.
<b>STRUCTURE:</b>	Acier embouti avec laiton usiné et pivot à ressort. Offert en quatre finis plaqués ou peints.
<b>CERTIFIÉ:</b>	c-CSA-us, c-UL-us