

# PICO 2021

PROJECT PROJÉT
SPEC TYPE
NOTES





## OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	LED TRACK 1 CIRCUIT	LED *	LED DIM * -8W 277V *
MOUNTING	2734E	2401C	2403G
STEM 4021	42.70"	40.20"	41.20"
STEM 4033	45.96"	43.46"	44.46"
FOR 2021/2033 ADD 1.60" FOR SWIVEL			
*FOR NO STEM / STEM ≤ 12IN -CANOPY 2401C + ACCESSORY 3983			

## MOUNTING OPTIONS OPTIONS DE MONTAGE

2734E	2401C	2403G
6.15" x 2.00" 156 x 51mm	Ø4.50" x 0.50" Ø114 x 13mm	Ø4.50" x 1.75" Ø114 x 44mm
* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS		

## STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

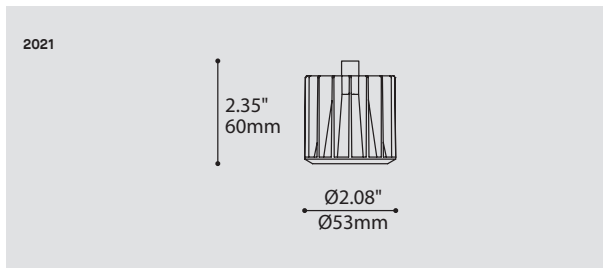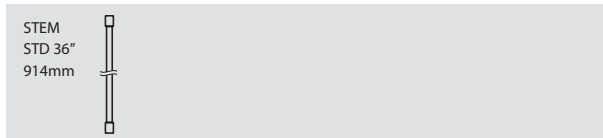

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	CODE
2021 PICO (PROJECTOR HEAD)	2021
LIGHT SOURCE SOURCE LUMINEUSE	
(WATTAGE, LAMP TYPE, OTHER INFO)	
LED.4 4W, LED	
LED.8 8W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	
30 3000K	
35 3500K	
40 4000K	
ANGLE BEAM ANGLE DE FAISCEAU	
17 17°	
48 48°	
VOLTAGE VOLTAGE	
120V 120 VOLT	
277V* 277 VOLT	
*NOT AVAILABLE WITH A TRACK ADAPTOR	
DIMMING OPTION OPTION DE GRADATION	
DV* 0-10V DIMMING (120-277V)	
DP PHASE DIMMING (120V ONLY)	
*NOT AVAILABLE WITH A TRACK ADAPTOR	
STEM TIGE	
S6 1/4" (6MM) STEM, FIELD ADJUSTABLE	
- NO STEM	
STEM LENGTH LONGUEUR DE TIGE	
36 36" STEM (STD LENGTH)	
** CUSTOM STEM LENGTH (PLEASE SPECIFY)*	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
*3983 ACCESSORY PROVIDED FOR STEM ≤ 12", EXCEPT LED 8W 120V NON-DIMMING	

## MOUNTING MONTAGE

RC*	ROUND CANOPY / PAVILLON ROND FOR LED NON-DIMMING & STEM ≤ 12": 0.50" CANOPY (2401C) FOR DIMMING LED & 8W 277V: 1.75" CANOPY (2403G) *CANOPY FINISH ALWAYS CHROME
TA1	TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT LED DIMMING & NON-DIMMING 120V ADAPTOR (2734E)

## MOUNTING OPTION OPTION DE MONTAGE

SCA*	SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°) *ONLY AVAILABLE WITH A STEM
------	--

## TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL (A)

WH	WHITE
BLK	BLACK
(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY	

## STRUCTURE FINISH FINI STRUCTURE

CHR	CHROME	CHR
-----	--------	-----

## HEATSINK FINISH FINI RADIATEUR

BLKA	BLACK ANODIZED	BLKA
------	----------------	------

## ACCESSORY ACCESSOIRE

3983	DEEP JUNCTION BOX (PROVIDED FOR STEM ≤ 12" AS PER ABOVE)
------	--

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



**DESIGN:** Nano and his little brother, Pico, pack a big punch in tiny formats. Their industrial look with visible heat sink allows for an impressive LED performance.

**LIGHT SOURCE:** 4W and 8W LED with 0-10V (DV) or phase (DP) dimming versions available.

**STRUCTURE:** Die-cast aluminum heat sink with black satin anodized finish and inner die-formed steel parts with black polyester powder finish.

**CERTIFIED:** c-CSA-us, c-UL-us

# ANATOMY

BIM

DIM


IES

LED

2021  
2021B  
350°

2021  
2021B  
60°

PICO

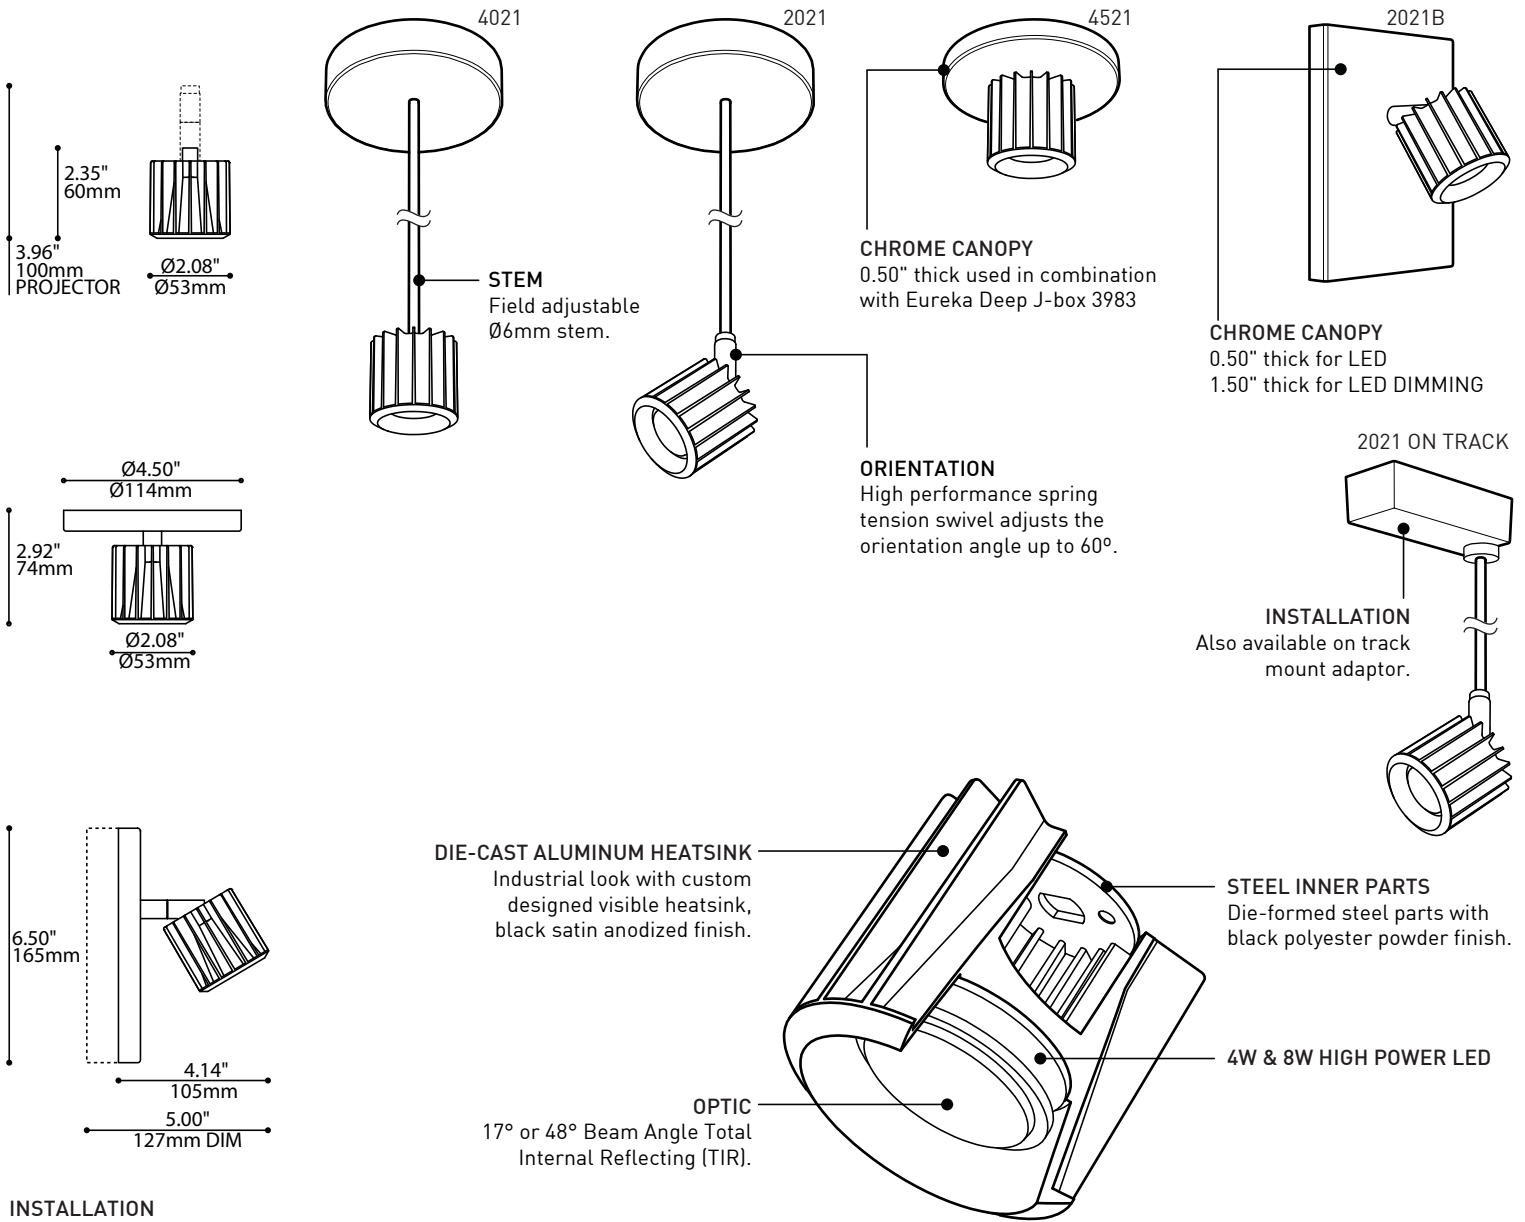

**INSTALLATION**  
Also available on track mount adaptor.

## SPECIFICATIONS


	4W LED	8W LED
LIGHT SOURCE	4x1W High Power LED on MCPCB - System Wattage 4.8W Total	4x2W High Power LED on MCPCB - System Wattage 9.9W Total
DELIVERED LUMENS	541 lm	1003 lm
CRI	80 CRI (typical)	
CCT	3-step MacAdam Ellipse binning	
HEATSINK	Black anodized aluminum	
LIGHT DISTRIBUTION	Directional projector (2021/2021B) or Direct (4021/4521)	
OPTICS	Total Internal Reflection (TIR) of 17° & 48° beam angle	
VOLTAGE	120V (DP) and 120-277V (DV)	
DRIVER	Constant Current driver 350mA, UL Recognized	Constant Current driver 700mA, UL Recognized
DIMMING	Phase Dimming (DP) and 0-10V Dimming (DV)	
LM-79	On request	On request
WARRANTY	5 years	



225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com



2021 4021  
2021B 4521

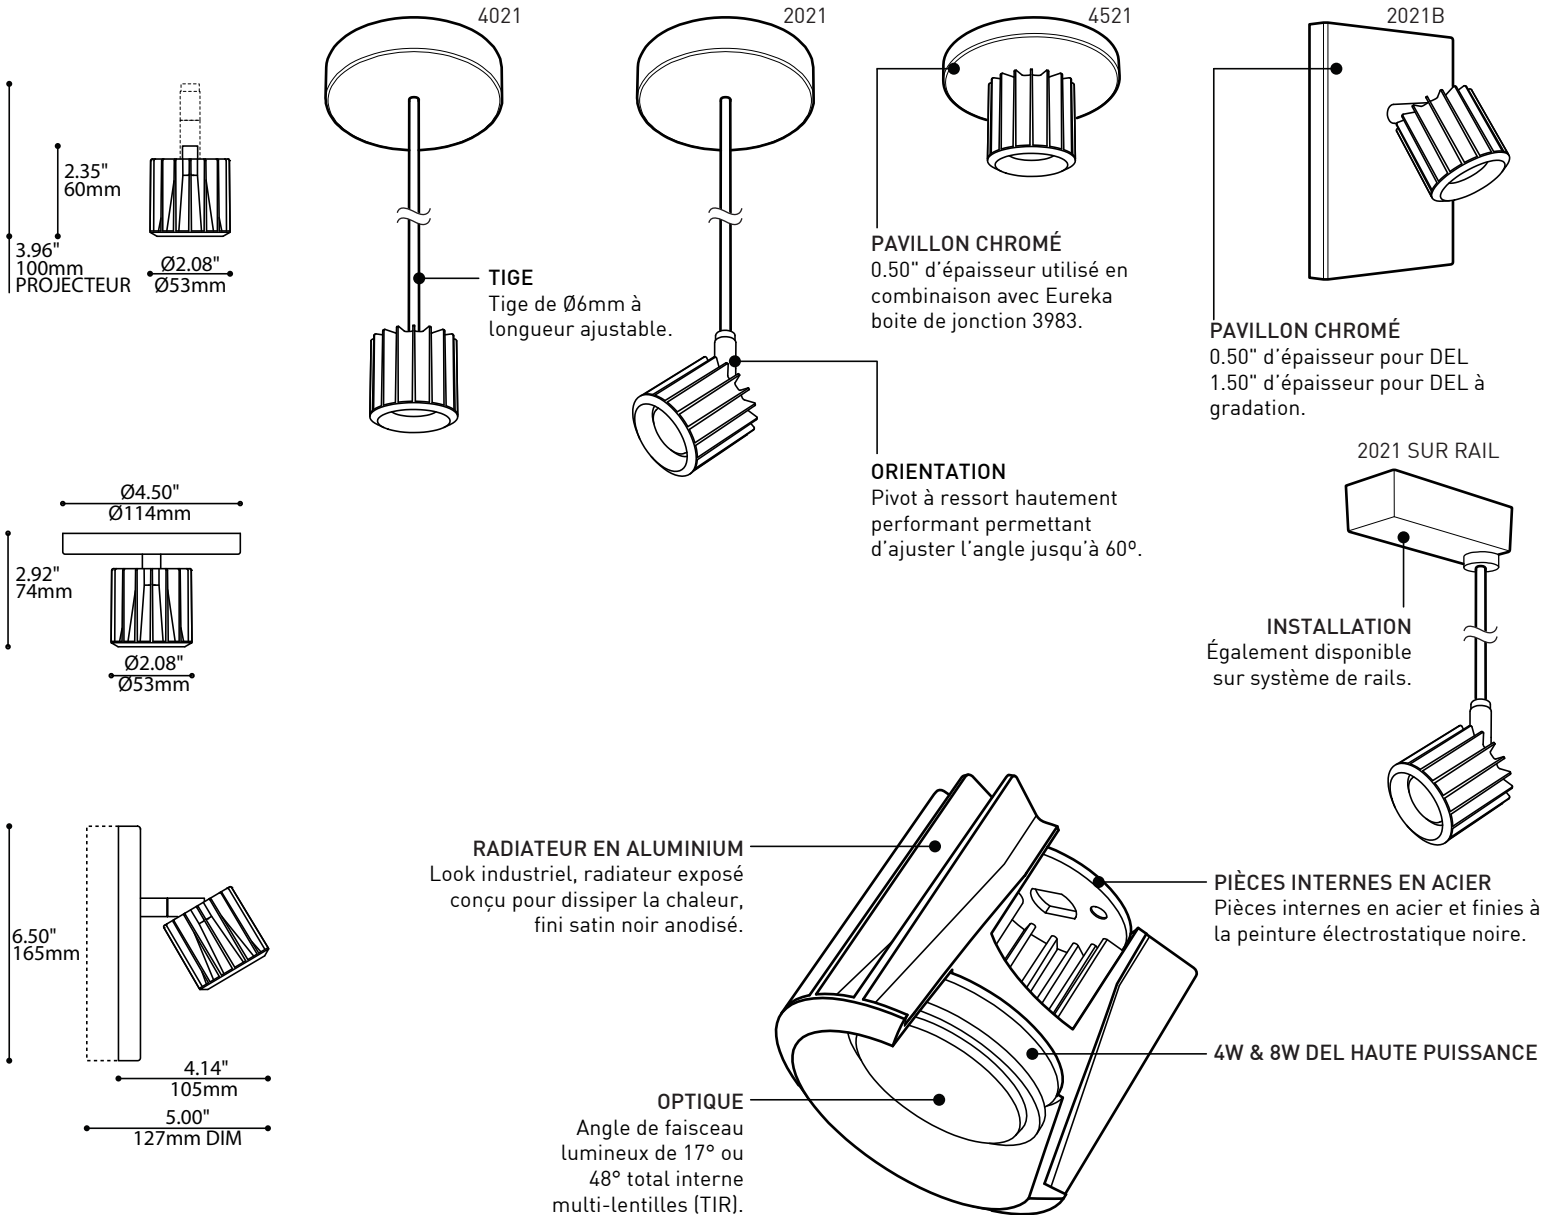

## SPECIFICATIONS

### SOURCE LUMINEUSE

### LUMENS RÉELS

### IRC

### CCT

### RADIATEUR

### DISTRIBUTION LUMINEUSE

### OPTIQUES

### VOLTAGE

### PILOTE

### GRADATION

### LM-79

### GARANTIE

## 4W DEL

4 DEL 1W haute puissance - Puissance totale de 4.8W

541 lm

80 CRI (typical)

3-step MacAdam Ellipse binning

Aluminium anodisé noir

Projecteur directionnel (2021/2021B) ou Direct (4021/4521)

Angle de faisceau de 17° & 48° Réflexion totale interne (TIR)

120V (DP) et 120-277V (DV)

Courant Constant 350mA, Reconnu UL

DP "phase dimming" et DV "0-10V dimming"

Sur demande

5 ans

## 8W DEL

4 DEL 2W haute puissance - Puissance totale de 9.9W

1003 lm

80 CRI (typical)

3-step MacAdam Ellipse binning

Aluminium anodisé noir

Projecteur directionnel (2021/2021B) ou Direct (4021/4521)

Angle de faisceau de 17° & 48° Réflexion totale interne (TIR)

120V (DP) et 120-277V (DV)

Courant Constant 700mA, Reconnu UL

DP "phase dimming" et DV "0-10V dimming"

Sur demande

5 ans