

# BIG SPIN 3036B


PROJECT PROJÉT
SPEC TYPE
NOTES



## OPTIONS



3036B-MIR

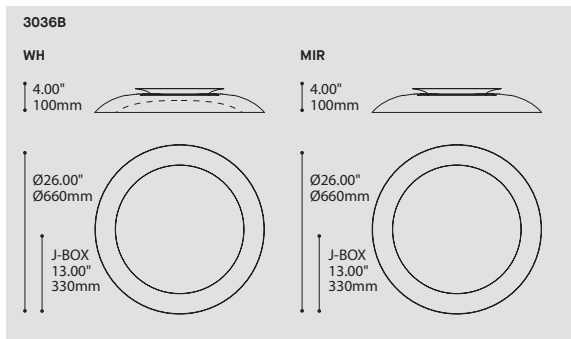

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL</b> MODÈLE	3036B BIG SPIN	3036B
<b>LIGHT SOURCE</b> SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)	
<b>3036B</b>		
<b>F.T5.C.40</b>	40W, FLUO, CIRCULAR T5, 2GX13 BASE	
<b>LED</b>	REGULAR OUTPUT	
<b>LED.HO</b>	HIGH OUTPUT	
<b>COLOR TEMPERATURE</b> TEMPÉRATURE DE COULEUR	FOR LED ONLY	
<b>30</b>	3000K	
<b>35</b>	3500K	
<b>40</b>	4000K	
<b>VOLTAGE</b> VOLTAGE	*ONLY AVAILABLE WITH F.T5.C.22 & F.T5.C.40	
<b>120V</b>	120 VOLT	
<b>277V</b>	277 VOLT	
<b>347V*</b>	347 VOLT	
<b>DIMMING OPTION</b> OPTION DE GRADATION	FOR LED ONLY	
<b>DV</b>	0-10V DIMMING (120-277V)	
<b>DP</b>	PHASE DIMMING (120V ONLY)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE.	
<b>EMERGENCY BATTERY</b> BATTERIE D'URGENCE	FOR F.T5.C.40, 120V OR 277V ONLY. <sup>(1)</sup> 3981B ACCESSORY IS REQUIRED FOR THIS OPTION	
<b>REM<sup>(1)</sup></b>	RECESSED EMERGENCY BATTERY	
<b>STRUCTURE FINISH</b> FINI STRUCTURE		<b>WHE</b>
<b>WHE</b>	WHITE FINE TEXTURE	
<b>DECORATIVE PLATE FINISH</b> FINI PLAQUE DÉCORATIVE		
<b>WHE</b>	WHITE FINE TEXTURE	
<b>MIR</b>	MIRROR	
<b>ACCESSORY</b> ACCESSOIRE		
<b>3981B*</b>	JUNCTION BOX FOR CIRCULAR T5 REMOTE EMERGENCY BATTERY	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



<b>DESIGN:</b>	Concentric parabolic reflectors create a simple and elegant direct and indirect lighting.
<b>LIGHT SOURCE:</b>	High power LED or T5 Circline sources available. Remote EM also available.
<b>STRUCTURE:</b>	Die-spun steel structure with white fine texture finish. The front plate is available in white or with a shatter proof mirror.
<b>DIFFUSER:</b>	Vacuum formed frosted polymer.
<b>CERTIFIED:</b>	c-CSA-us, c-UL-us
<b>CONCEPTION:</b>	Réflecteurs paraboliques concentriques créant un éclairage simple et élégant, direct et indirect.
<b>SOURCE LUMINEUSE:</b>	DEL haute performance ou T5 circulaire. Batterie d'urgence à distance offerte.
<b>STRUCTURE:</b>	Structure d'acier embouti avec fini blanc texturé. La plaque frontale décorative est offerte en blanc ou avec un miroir incassable.
<b>DIFFUSEUR:</b>	Polymère givré thermoformé.
<b>CERTIFIÉ:</b>	c-CSA-us, c-UL-us

## FAMILY FAMILLE





3036

4236



3036B

4236B

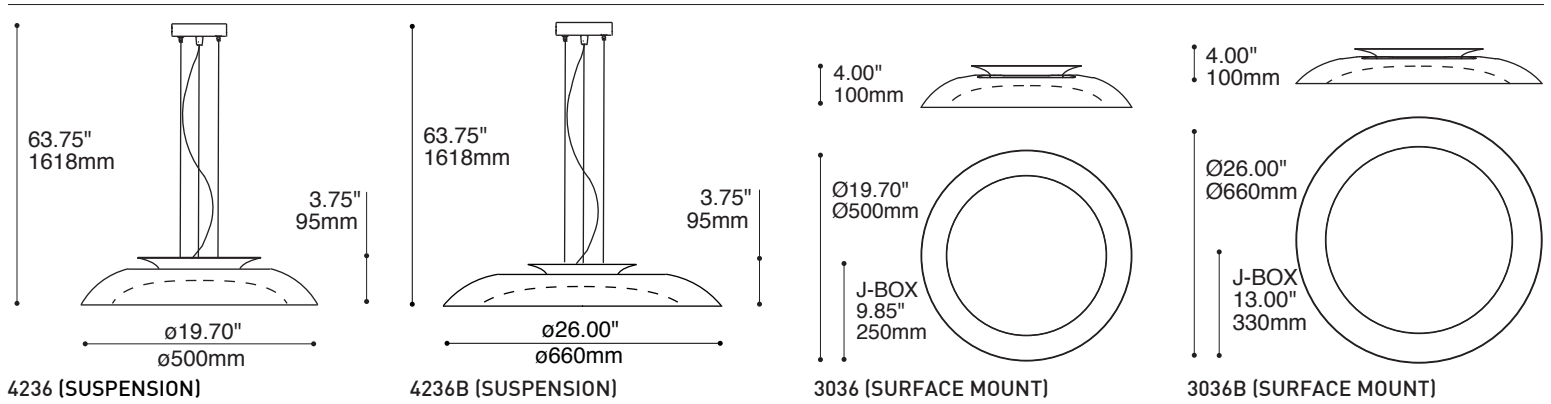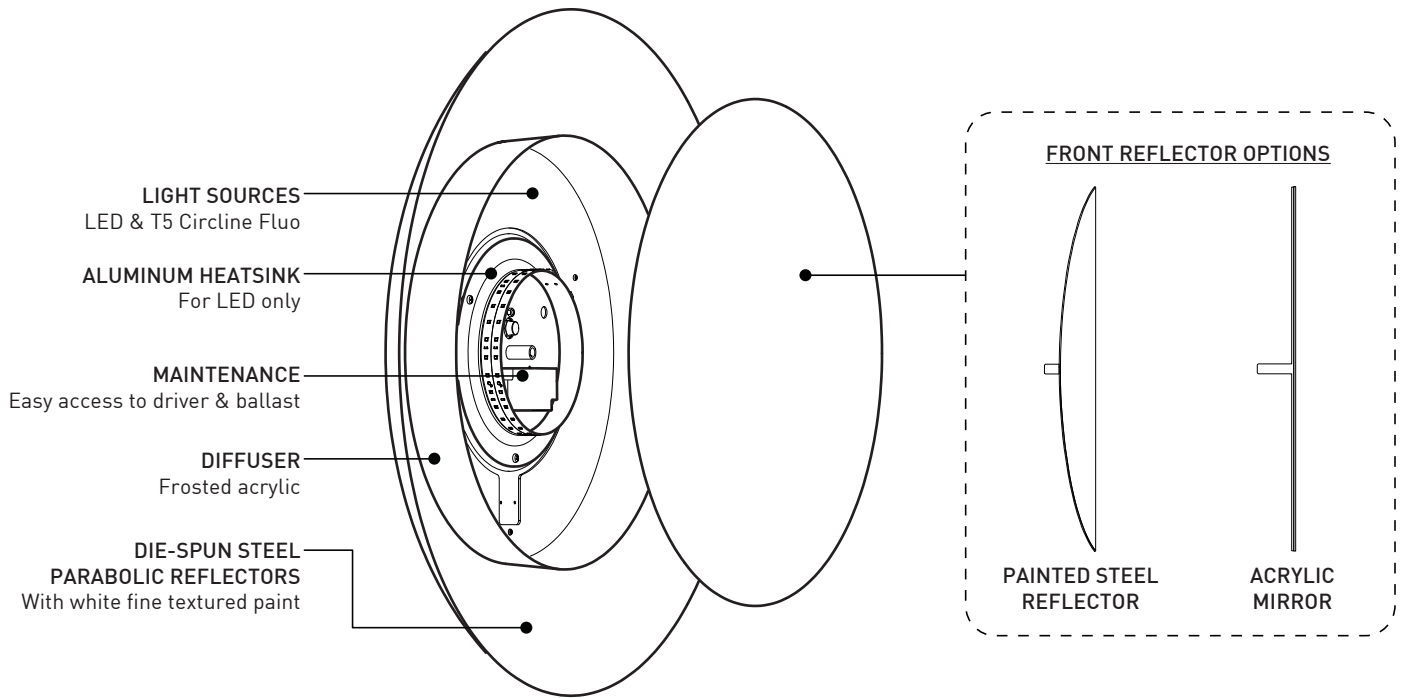

### SPECIFICATIONS

	LED	FLUORESCENT
LIGHT SOURCE	39 x LED (Reg) & 78 x LED (HO)	22W - 40W T5 CIRCLINE
DELIVERED LUMENS	1347 lm (Reg) & 2602 lm (HO)	1130 lm [XX36-FT5C22] & 2080 lm [XX36B-FT5C40]
SYSTEM WATTAGE	17W (Reg) & 32W (HO)	25W [XX36-FT5C22] & 60W [XX36B-FT5C40]
CRI	80 CRI (typical)	N/A
LIGHT DISTRIBUTION	Direct-Indirect	
MODULE	UL Recognized - Proprietary design - Made in USA	N/A
STRUCTURE	Die-spun steel structure + Mirror (MIR option)	
VOLTAGE	120V or 277V	120 or 277V and 347V
DRIVER	Constant current 350mA (Reg) or 700mA (HO), UL recognized	Advance Smartmade or equivalent
DIMMING	Phase dimming (DP) and 0-10V dimming (DV)	N/A
URGENCY	N/A	Remote Emergency Battery for FT5C40
LM-79 & ROHS	Available on request	
WARRANTY	5 years	3-5 years (on ballast, depending of ballast)

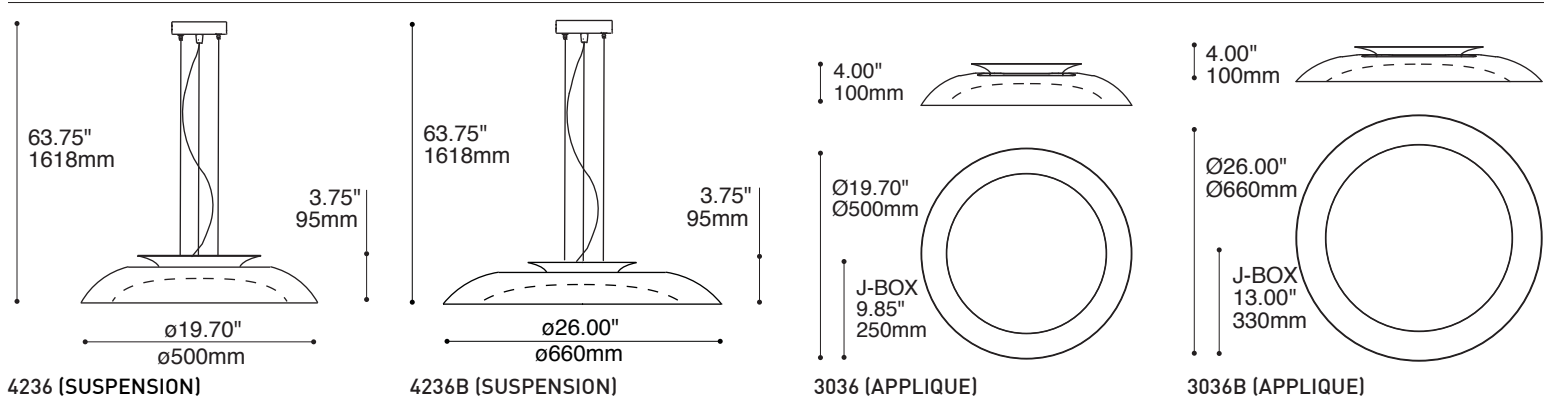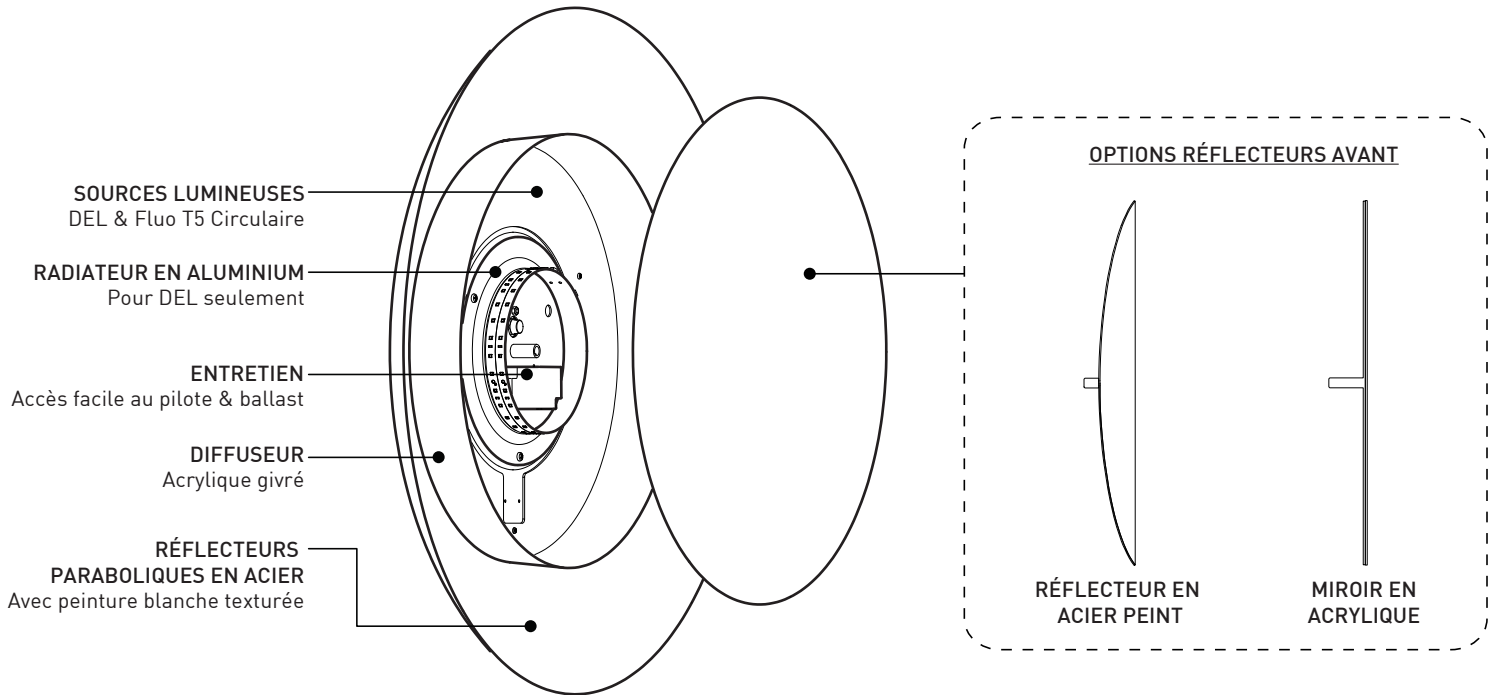

### SPECIFICATIONS

**SOURCE LUMINEUSE**  
**LUMENS (LIVRÉS)**  
**CONSOMMATION TOTALE**  
**IRC**  
**DISTRIBUTION LUMINEUSE**  
**MODULE**  
**STRUCTURE**  
**VOLTAGE**  
**PILOTE**  
**GRADATION**  
**URGENCE**  
**LM-79 & ROHS**  
**GARANTIE**

### DEL

39 x DEL (Reg) & 78 x DEL (HO)  
1347 lm (Reg) & 2602 lm (HO)  
17W (Reg) & 32W (HO)  
80 IRC (typique)  
Direct-Indirect  
Reconnu par UL - Fabriqué aux États-Unis  
Structure d'acier repoussé + Miroir (option MIR)  
120V ou 277V  
350mA (Reg) ou 700mA (HO)  
Phase (DP) ou 0-10V (DV)  
Sur demande & Conforme  
5 ans (sur les composantes électroniques)

### FLUORESCENT

22W - 40W T5 CIRCULAIRE  
1130 lm (XX36-FT5C22) & 2080 lm (XX36B-FT5C40)  
25W (XX36-FT5C22) & 60W (XX36B-FT5C40)  
N/A  
N/A  
120 ou 277V et 347V  
Advance Smartmade ou équivalent  
N/A  
Batterie d'urgence à distance pour FT5C40  
3-5 ans (sur le ballast, selon le ballast)