

SENET 3217

PROJECT PROJET

SPEC TYPE

NOTES



FAMILY FAMILLE



4234-XFY




4427-XFY



4425-XFY

3217



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

3217 SENET

3217

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

F.T5.14 14W, T5

F.T5.24 24W, T5 HO

2XF.T5.14 14W X 2, T5

2XF.T5.24 24W X 2, T5 HO

LED REGULAR OUTPUT

LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY

30 3000K

35 3500K

40 4000K

VOLTAGE VOLTAGE

120V 120 VOLT

277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH 2XF.T5.24 ONLY

DM1 ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST*

AVAILABLE WITH F.T5.14 & 2XF.T5.14 ONLY

DM7 ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST*

AVAILABLE WITH ALL T5 LIGHT SOURCES

D3D LUTRON HI-LUME 3D ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)*

D33 LUTRON HI-LUME 3D ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)*

AVAILABLE WITH ALL LED LIGHT SOURCES

DV 0-10V DIMMING (120-277V)

DP PHASE DIMMING (120V ONLY)

EMERGENCY BATTERY BATTERIE D'URGENCE

AVAILABLE WITH ALL T5 LIGHT SOURCES

NOT AVAILABLE WITH A DIMMING BALLAST, LED LIGHT SOURCE OR WITH A 3980 ACCESSORY (MINI JUNCTION BOX)

REM⁽¹⁾ RECESSED EMERGENCY BATTERY

⁽¹⁾ 3981B ACCESSORY IS REQUIRED FOR THIS OPTION

STRUCTURE FINISH FINI STRUCTURE

CHR CHROME

CHR

DIFFUSER FINISH FINI DIFFUSEUR

WH WHITE

WH

ACCESSORY ACCESSOIRE

3980 MINI JUNCTION BOX

3981B JUNCTION BOX FOR T5 REMOTE EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: Graceful lines diffuse light beautifully along this elegant form. Chrome end caps and ADA compliant.

LIGHT SOURCE: LED and T5 light sources. Dimming and EM available.

STRUCTURE: Die-stamped steel structure with plated finish.

DIFFUSER: Hand blown white triplex glass.

CERTIFIED: c-CSA-us, c-UL-us



CONCEPTION: Lignes gracieuses diffusant magnifiquement la lumière le long de cette forme élégante. Embouts chromés. Conforme à la norme ADA.

SOURCE LUMINEUSE: DEL offerte et T5; ballasts à gradation et d'urgence offerts.


STRUCTURE: Acier embouti plaqué.

DIFFUSEUR: Verre triplex blanc soufflé à la main.

CERTIFIÉ: c-CSA-us, c-UL-us

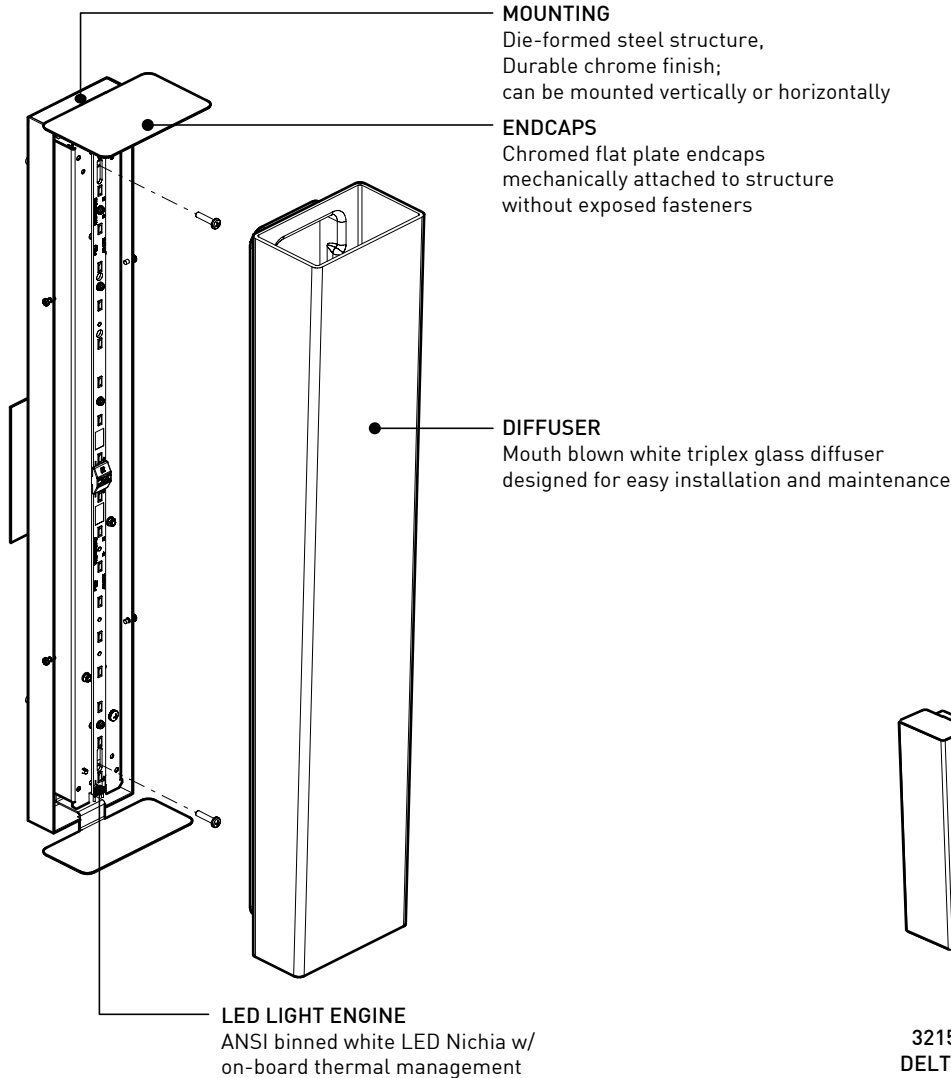

3215
DELTA



3216
FOLIA



3217
SENET

SPECIFICATIONS



LIGHT SOURCE
MODULE
LUMENS (DELIVERED)
SYSTEM WATTAGE
CCT / CRI
ROHS
THERMAL MANAGEMENT
LIGHT DISTRIBUTION
VOLTAGE
DIMMING
LM-79 / L70
HOUSING
DIFFUSER
MOUNTING
ENDCAPS
WARRANTY

LED-REG

LED-HO

FLUORESCENT

18 x NICHIA LEDES		1 or 2 x 14w T5 / 1 or 2 x 24w T5HO
UL recognized - made in USA		
690 lm	1002 lm	
9W	13.5W	
80 CRI (typical)		
Compliant		
Light Engine w/ on-board Thermal Management		
Direct - 120° Beam Angle		Direct
120 or 277V		120V-277V, 347V
Phase (DP) or 0-10V (DV) Dimming		Advance Mark 7 (T5), Mark 10 (T5HO) or Lutron
On request / Estimated 50 000 hrs		
Formed Cold Rolled steel finished in white polyester powder coat (0.036" nominal thickness)		
Mouth blown white triplex glass		
Formed Cold Rolled Steel (0.060" nominal thickness) w/ Chrome Plated Finish		
Precision laser cutting and Formed Cold rolled Steel (0.048" nominal thickness) w/ Chrome Plated Finish		
5 years		1 year

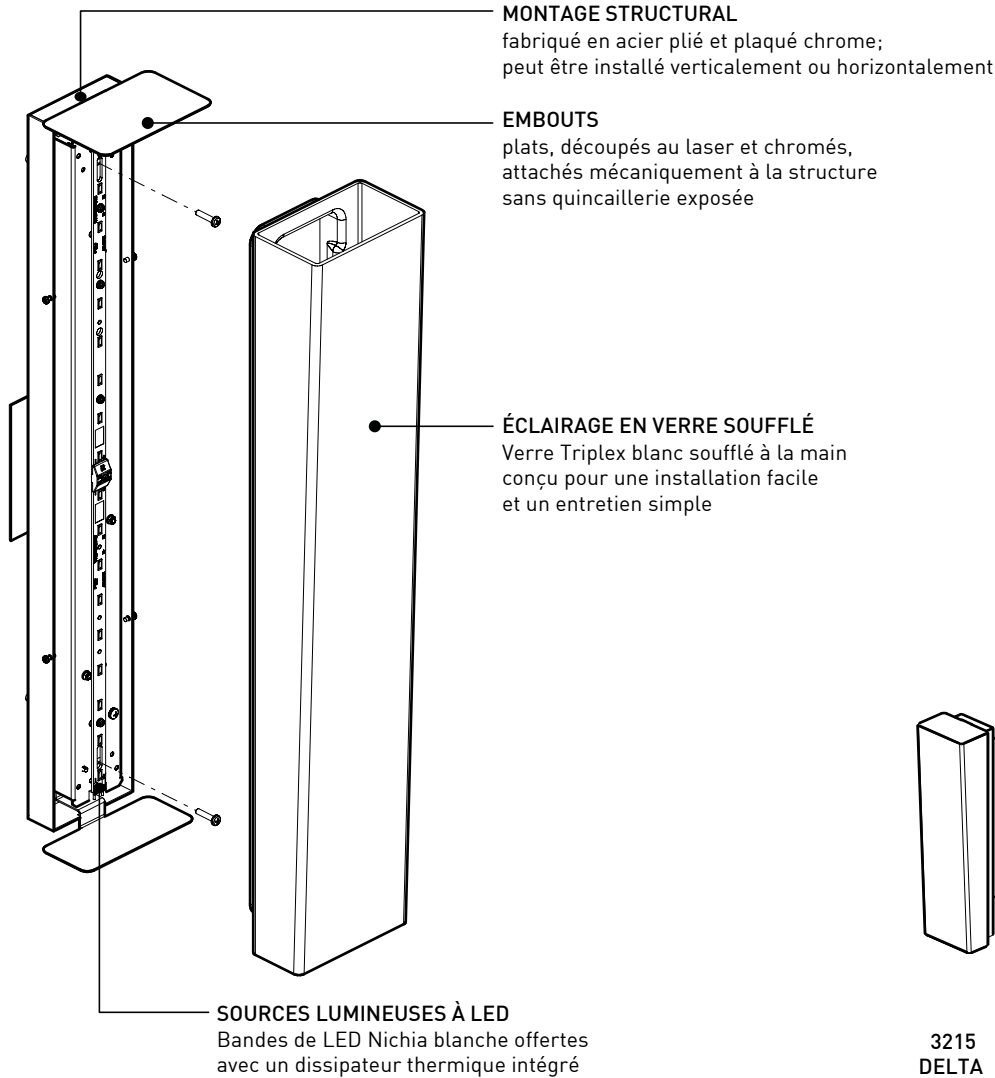

3215
DELTA



3216
FOLIA



3217
SENET

SPÉCIFICATIONS

	LED-REG	LED-HO	FLUORESCENTE
SOURCE LUMINEUSE	18 x NICHIA LEDES		1 ou 2 x 14w T5 / 1 ou 2 x 24w T5HO
MODULE	Reconnu UL - Fabriqué aux États-Unis		
LUMENS (LIVRÉS)	690 lm	1002 lm	
CONSOMMATION TOTALE	9W	13.5W	
CCT / CRI	80 CRI (typique)		
ROHS	Conforme		
GESTION THERMIQUE	Sources lumineuses avec autocontrôle de température		
DISTRIBUTION LUMINEUSE	Directe - diffusée à 120°		Directe
VOLTAGE	120 ou 277V		120V-277V, 347V
GRADATION	Gradation phase (DP) ou 0-10V (DV)		Advance Mark 7 (T5), Mark 10 (T5HO) ou Lutron
LM-79 / L70	Sur demande / 50 000 hrs estimées		
BOÎTIER	Acier découpé, plié (0.036" épaisseur nominale) / fini de peinture électrostatique à base de Polyester blanche		
DIFFUSEUR	Verre Triplex blanc soufflé à la main		
MONTAGE STRUCTURAL	Acier découpé, plié (0.060" épaisseur nominale) et chromé		
EMBOUTS	Acier découpé, plié (0.048" épaisseur nominale) et chromé		
GARANTIE	5 ans		1 an