

# FLEX ONE 3416 / FLEX TWO 3417


PROJECT PROJET

SPEC TYPE

NOTES



## OPTIONS

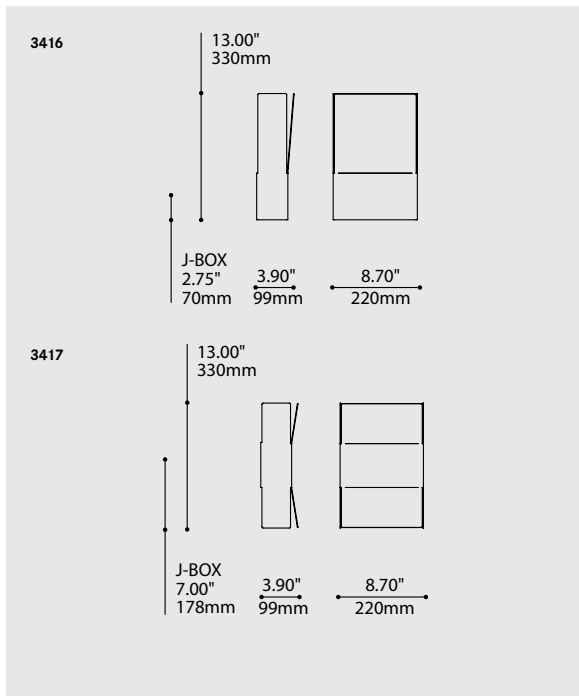

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

### MODEL MODÈLE

3416 FLEX ONE  
3417 FLEX TWO

### LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

**3416**

**CF.D.18** 18W, CFL, DOUBLE TWIN TUBE, G24Q2 BASE  
**CF.D.26** 26W, CFL, DOUBLE TWIN TUBE, G24Q3 BASE  
**LED.6.30** 6W, LED 3000K (WARM)  
**LED.6.40** 6W, LED 4000K (NEUTRAL)

**3417**

**2XCF.D.18** 18W X 2, CFL, DOUBLE TWIN TUBE, G24Q2 BASE  
**2XLED.6.30** 6W X 2, LED 3000K (WARM)  
**2XLED.6.40** 6W X 2, LED 4000K (NEUTRAL)

### VOLTAGE VOLTAGE

120V 120 VOLT  
277V\* 277 VOLT  
347V\*\* 347 VOLT

\* ONLY AVAILABLE WITH CF.D.18, CF.D.26 & 2XCF.D.18 AND LED WITH DIMMING DRIVER DLT

\*\* ONLY AVAILABLE WITH CF.D.18, CF.D.26 & 2XCF.D.18 (NON-DIMMING BALLAST)

### DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH CF.D.18, CF.D.26 & 2XCF.D.18

**DM1** ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST\*  
**DM7** ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST\*  
**DED** LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)\*  
**DE3** LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)\*

AVAILABLE WITH LED.6.30, LED.6.40, 2XLED.6.30, 2XLED.6.40

**DLT** LIGHTTECH TRAILING EDGE ELECTRONIC DIMMING DRIVER\*

\*SEE REFERENCE SECTION FOR OPTIONS PAGE 524

### EMERGENCY BATTERY BATTERIE D'URGENCE

AVAILABLE WITH CF.D.18, CF.D.26 & 2XCF.D.18, 120V OR 277V ONLY  
NOT AVAILABLE WITH A DIMMING BALLAST

**REM** <sup>(1)</sup> REMOTE EMERGENCY BATTERY\*

<sup>(1)</sup> 3981 ACCESSORY IS REQUIRED FOR THIS OPTION

\*SEE REFERENCE SECTION FOR EMERGENCY BATTERY DETAILS PAGE 530

### DIFFUSER FINISH FINI DIFFUSEUR

**SC** SATIN CHROME

### ACCESSORY ACCESSOIRE

**3981\*** JUNCTION BOX FOR CFL REMOTE EMERGENCY BATTERY

\*SEE PAGE 530

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

**Design:** The perfectly proportioned plated steel housing now has a translucent acrylic lamp shields

**Installation:** Vertical mounting is recommended

**Light Source:** Indirect only (3416) either 6W LED in 3000K (Warm white) or 4000K (Neutral white) or 18W CFL or 26W CFL; direct / indirect (3417B) either 2 x 6W LED in 3000K (Warm white) or 4000K (Neutral white) or 2 x 26W CFL

**Structure:** Die-stamped steel diffuser and steel inner structure with white polyester powder paint finish

**Diffusers:** Translucent frosted acrylic

**Certified:** c-CSA-us

**Conception:** Boîtier en acier plaqué parfaitement proportionné possédant maintenant un acrylique translucide, qui protège les ampoules


**Installation:** Position verticale recommandée

**Source lumineuse:** Indirect seulement (3416) pour DEL 6W en 3000K (blanc chaud) ou 4000K (blanc neutre) ou CFL 18W ou CFL 26W; direct / indirect (3417B) DEL 2 x 6W en 3000K (blanc chaud) ou 4000K (blanc neutre) ou CFL 2 x 26W


**Structure:** Diffuseur d'acier découpé et plié avec placage chrome satiné. Structure intérieure peinte avec peinture électrostatique à base de polyester blanche

**Diffuseur:** Acrylique givré translucide


**Certifié:** c-CSA-us



POSITION 1




POSITION 2

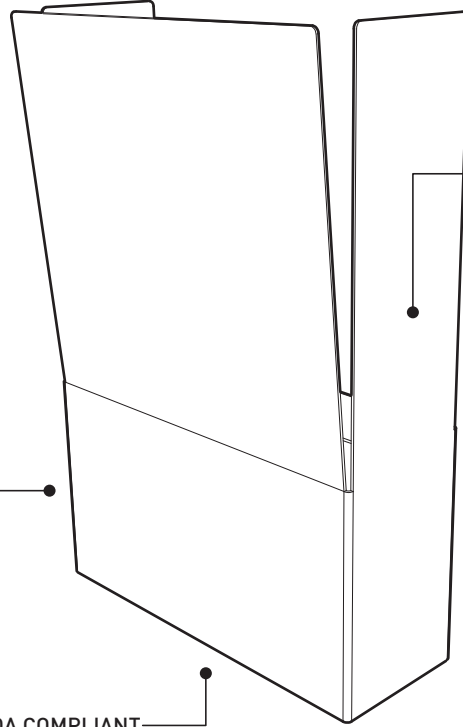


**SATIN CHROME HOUSING**  
White polyester powder painted inner structure  
Highly Reflective  
Easy access for installation and maintenance

**LIGHT SOURCES**  
LED : 6W  
CFL : 18/26W  
(DIM & EM available)

ADA COMPLIANT

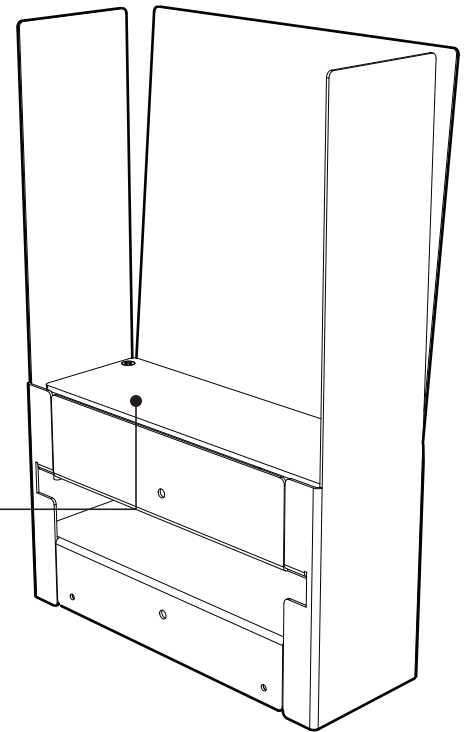

**TRANSLUCENT ACRYLIC DIFFUSER AND PROTECTOR**  
Shields lamps  
Prevents dust

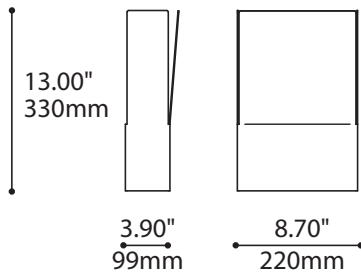

## SPECIFICATIONS


LIGHT SOURCE  
MODULE  
LUMENS (ESTIMATED)  
CRI  
ROHS  
HOUSING  
HEATSINK  
LIGHT DISTRIBUTION  
DIFFUSER  
VOLTAGE  
DRIVER / BALLAST  
DIMMING  
EMERGENCY  
LM-79  
WARRANTY

### LED


1 x 6W Luxeon Rebel  
UL recognized - made in USA  
510 lm  
85 CRI (3000K) - 85 CRI (4000K)  
Compliant  
Die-formed satin chromed steel  
Aluminium  
Indirect  
Translucent acrylic  
120-240V, 120-277V (Dimming)  
Hatch 700 mA  
Ligtech 700mA  
Available  
5 years

### FLUORESCENT


1 x 18 or 26W CFL  
1250 lm/lamp (18W) & 1800 lm/lamp (26W)  
Die-formed satin chromed steel  
Indirect  
Translucent acrylic  
120-277/347V, 120-277V (Dimming)  
Universal  
Advance Mark 7 & Mark 10, Lutron Ecosystem Digital or 3-Wire  
IOTA ISL-42-EM-B (1 Lamp 26w-425 lm/90 min)  
1 year



POSITION 1



POSITION 2

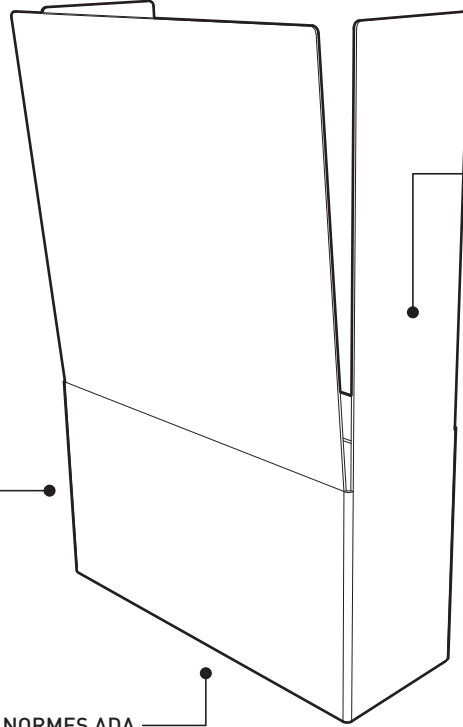


SOURCES LUMINEUSES  
LED : 6W  
CFL : 18/26W  
(DIM & EM disponibles)


CONFORME AUX NORMES ADA

BOÎTIER CHROME SATINÉ

Intérieur avec fini de peinture électrostatique à base de polyester très réfléchissante et blanche. Accès facile pour l'installation et l'entretien

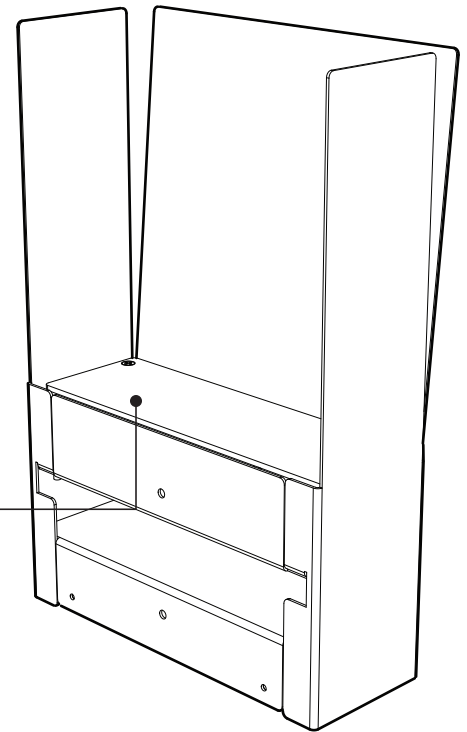

PROTECTEUR ET DIFFUSEUR  
TRANSLUCIDE D'ACRYLIQUE  
Couvre les sources lumineuses  
Protège contre la poussière

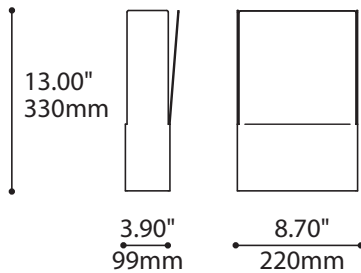

## SPÉCIFICATIONS

SOURCE LUMINEUSE

MODULE

LUMENS (ESTIMÉS)

IRC

ROHS

BOÎTIER

RADIATEUR

DISTRIBUTION LUMINEUSE

DIFFUSEUR

VOLTAGE

PILOTE / BALLAST

GRADATION

URGENCE

LM-79

GARANTIE

## DEL

1 x 6W

Reconnu par UL - Fabriqué aux États-Unis

510 lm

85 IRC (3000K) - 85 IRC (4000K)

Conforme

Acier embouti avec fini chrome satiné

Aluminium

Indirect / Direct-Indirect

Acrylique translucide

120-240V, 120-277V (à intensité variable)

Hatch 700 mA

Lightech 700mA

Disponible

5 ans

## FLUORESCENT

1 x 18 ou 26W CFL

1250 lm/lamp (18W) & 1800 lm/lamp (26W)

Acier embouti avec fini chrome satiné

Indirect / Direct-Indirect

Acrylique translucide

120-277/347V, 120-277V (à intensité variable)

Universel

Advance Mark 7 & Mark 10, Lutron Ecosystem Digital ou 3-Fils

IOTA ISL-42-EM-B (1 Source 26w-425 lm/90 min)

1 an