



NODE 3446

PROJECT PROJÉT
SPEC TYPE
NOTES

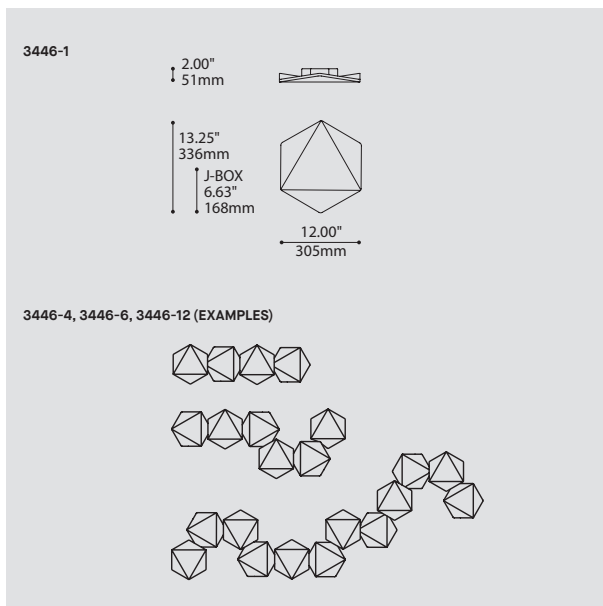

OPTIONS



ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
3446-1	NODE 12" SET OF 1	
3446-4	NODE 12" SET OF 4	
3446-6	NODE 12" SET OF 6	
3446-12	NODE 12" SET OF 12	
LIGHT SOURCE SOURCE LUMINEUSE		LED.3
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.3	☞ 3W, LED (PER UNIT)	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP*	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE. *NOT AVAILABLE WITH 3446-1		
SHADE LOCK OPTION OPTION D'ABAT-JOUR BARRÉ		
IF NO OPTION IS SELECTED, THE SHADE ATTACHMENT IS MAGNETIC.		
LOC	NON REMOVABLE SHADE*	
*SECURED WITH SCREW IN ADDITION TO MAGNETIC ATTACHEMENT		
STRUCTURE FINISH FINI STRUCTURE		WHE
WHE	WHITE FINE TEXTURE	
SHADE FINISH FINI ABAT-JOUR		
CHF	CHARCOAL FELT	
REF	RED FELT	
SGF	SILVER GRAY FELT	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



- DESIGN:** Compose an original pattern of light with these warmly diffused soft felt hexagonal shapes. Create your personal motif using one or several sets of up to 12 Nodes at varying angles to add a large unique ambient lighting pattern and inspiration to your space.
- INSTALLATION:** Designed for rapid installation of up to 12 units on a single junction box. Quick connection through a discreet joiner arm on mounting surface. Units are added in increments of 60°. The shade is quickly secured with magnetic fittings (screw attachment option available).
- SHADE:** A hexagon shaped 3D molded synthetic felt material made of recycled polyester; it is light, rigid, recyclable and sound absorbing. Low VOC, no formaldehyde, non-irritable, odourless, stable.
- CERTIFIED:** c-CSA-us. ASTM C423 0.75 NRC material. Fire rating equivalent: C423 ASTM E-84 / CAN ULC S102 Class A
- CONCEPTION:** Créez un motif original et infini de lumière diffuse avec ces formes hexagonales feutrées. Isolez un Node ou regroupez jusqu'à douze hexagones reliés ensemble selon les angles que vous désirez pour ajouter un grand effet créatif de lumière ambiante dans votre espace.
- INSTALLATION:** Conçu pour une installation rapide, seulement une boîte de jonction est requise pour toute installation jusqu'à un maximum de 12 unités. Joints par des bras de connexion avec connecteurs rapides localisés discrètement sur la surface de montage, chaque Node peut s'orienter en incréments de 60° entre eux durant l'installation. L'abat-jour est fixé instantanément avec de puissants aimants (attache par vis offert en option).
- ABAT-JOUR:** Forme hexagonale moulée en feutre aux propriétés acoustiques et composée de polyester recyclé. Légère, rigide, recyclable, bas COV, sans formaldéhyde, non irritante et inodore.
- CERTIFIÉ:** c-CSA-us. Acoustique: ASTM C423: NRC 0.75. Résistance Feu équivalent: ASTM E-84 / CAN ULC S102 Classe A

FAMILY FAMILLE



3446 (WALL)

3446B (WALL)


3446B (CEILING)

A CUSTOM LIGHT INSTALLATION FOR YOUR SPACE

Starting from a single power connection, connect a set of up to 12 Nodes for your personalised motif design. Install additional sets to expand the pattern further.




CREATIVE NETWORK

Here are just a few examples of the endless possibilities of Node:

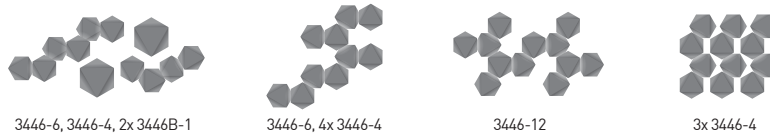


WEB OF LIGHT

Each Node emits a soft spread of indirect light on the wall or ceiling. The cumulative effect of multiple lights combines to enliven and brighten the room.

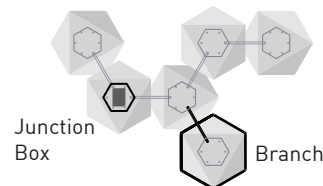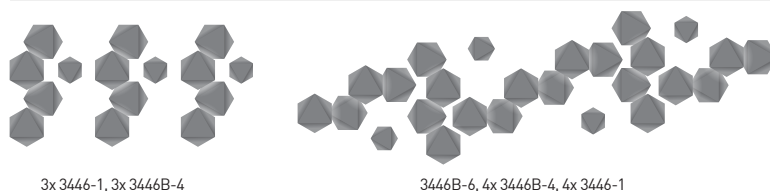

FLEXIBLE SETUP

Connect up to 12 Nodes with connector bars in angles of 0°, +60° and -60°. Optionally create Secondary Branches at available locations. The total quantity is the set size. Install more sets to continue the pattern.

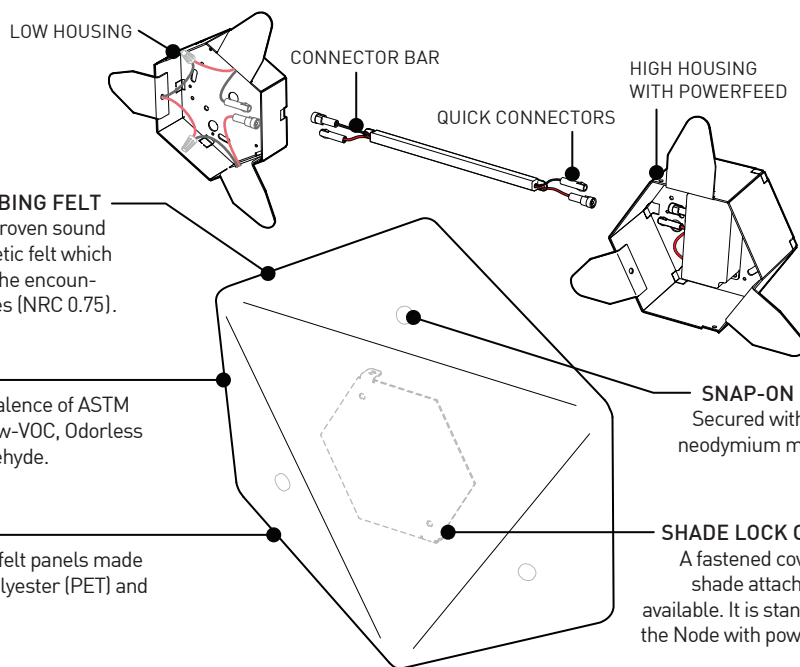

SOUND ABSORBING FELT

Composed of a proven sound absorbing synthetic felt which absorbs 75% of the encountered soundwaves (NRC 0.75).

SAFE

Fire Rated equivalence of ASTM E-84 Class A. Low-VOC, Odorless and no Formaldehyde.

ECOLOGICAL

Custom molded felt panels made from recycled polyester (PET) and are recyclable.




SNAP-ON SHADE

Secured with strong neodymium magnets.


SHADE LOCK OPTION

A fastened coverplate shade attachment is available. It is standard on the Node with power feed.


12" SIZE

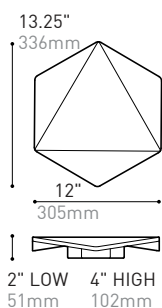


OFFERED SETS:

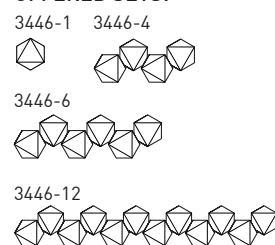

17" SIZE

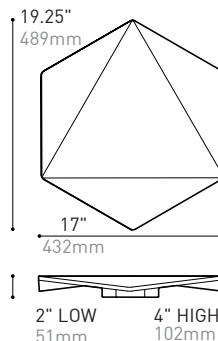

OFFERED SETS:

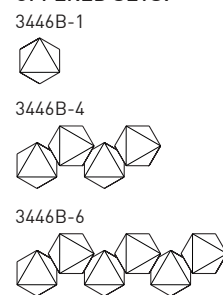

SPECIFICATIONS

	3446-1	3446-4	3446-6	3446-12	3446B-1	3446B-4	3446B-6
LIGHT SOURCE	3x Nichia LED	12x Nichia LED	18x Nichia LED	36x Nichia LED	3x Nichia LED	12x Nichia LED	18x Nichia LED
DELIVERED LUMENS	330lm (4000K)	1320lm (4000K)	1980lm (4000K)	3960lm (4000K)	595lm (4000K)	2380lm (4000K)	3570lm (4000K)
SYSTEM WATTAGE	3,8W Total	14W Total	21W Total	42W Total	7,5W Total	28W Total	42W Total
LIGHT DISTRIBUTION	Indirect						
CRI	85 CRI Typical						
VOLTAGE	120V - 277V (Phase dimming is 120v only)						
STRUCTURE	Recycled Polyester felt shade, Die formed 18ga steel housing						
LED MODULE	Mid power LED, UL Recognized, Proprietary design, Made in USA						
DRIVER & DIMMING	Constant Current, 0-10V dimming (DV) & Phase dimming (DP)*, UL Recognized						*3446-1 is not available with Phase dimming
LM-79	On request						
WARRANTY	5 years						

CRÉER VOTRE MOTIF

À partir d'un seul boîtier d'alimentation électrique, connecter un ensemble de jusqu'à 12 Nodes dans un motif personnalisé. Installer d'autres ensembles afin d'agrandir le motif davantage.



RESEAU CRÉATIF

Voici quelques exemples des possibilités infinies du Node:



TISSAGE DE LUMIÈRE


Chaque Node émet un doux diffusion de lumière indirecte sur le mur ou plafond. L'effet cumulatif des Nodes se combinent pour animer et éclaircir votre espace.

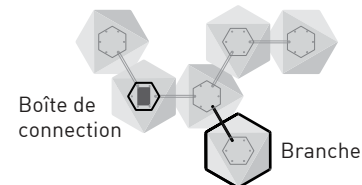


INSTALLATION FLEXIBLE

Connecter jusqu'à 12 Nodes avec barres de connection dans des angles de 0°, +60° et -60°. Placer optionnellement des branches secondaires. La quantité totale est la celle de l'ensemble. Installer plus d'ensembles afin de continuer le motif.


GRANDEUR 12"

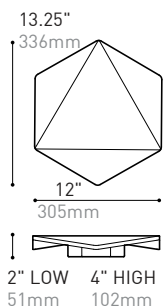



ENSEMBLES OFFERTS :

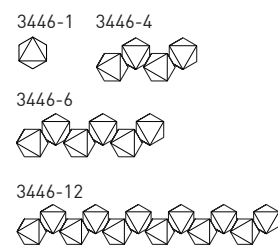

GRANDEUR 17"

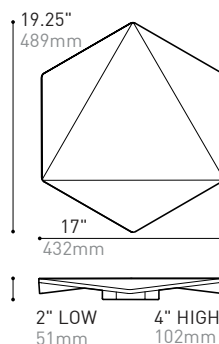

ENSEMBLES OFFERTS :

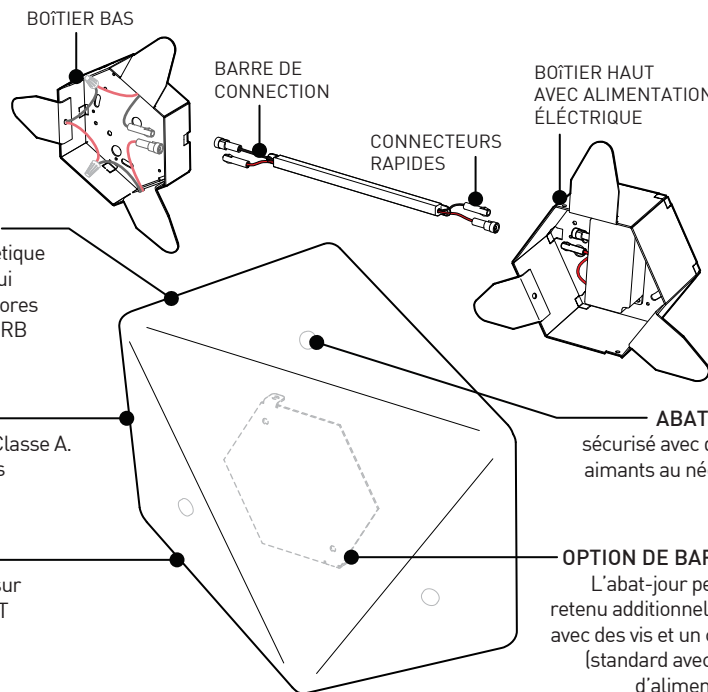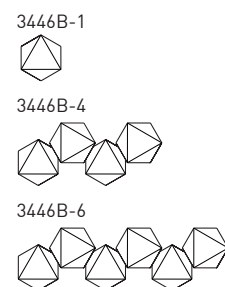

MATÉRIAU ACOUSTIQUE

Composé d'un feutre synthétique acoustique rigide éprouvé qui absorbe 75% des ondes sonores qui le rencontrent avec un CRB (NRC) de 0.75.

SÉCURITAIRE

Résistance feu ASTM E-84 Classe A. Bas COV, sans odeur et sans Formaldéhyde.

ÉCOLOGIQUE

Panneaux de feutre moulé sur mesure fait de polyester PET recyclés et recyclables.



SPÉCIFICATIONS

	3446-1	3446-4	3446-6	3446-12	3446B-1	3446B-4	3446B-6
SOURCE LUMINEUSE	3 DEL Nichia	12 DEL Nichia	18 DEL Nichia	36 DEL Nichia	3 DEL Nichia	12 DEL Nichia	18 DEL Nichia
LUMENS LIVRÉS	330lm (4000K)	1320lm (4000K)	1980lm (4000K)	3960lm (4000K)	595lm (4000K)	2380lm (4000K)	3570lm (4000K)
WATTAGE SYSTÈME	3,8W Total	14W Total	21W Total	42W Total	7,5W Total	28W Total	42W Total
DISTRIBUTION LUMINEUSE	Indirecte						
IRC	85 IRC Typique						
VOLTAGE	120V - 277V (Gradation Phase en 120V seulement)						
STRUCTURE	Abat-jour moulé en polyester recyclé, Boîtier en acier 18ga						
MODULE DEL	DEL de moyenne puissance, Reconnu UL, Conception Eureka, fait au É.U.						
UNITÉ D'ALIMENTATION	Courant constant, gradation 0-10V (DV) et Gradation phase (DP)*, Reconnu UL				*3446-1 n'est pas disponible avec gradation Phase		
LM-79	Sur demande						
GARANTIE	5 ans						



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



3446X-XX