


STROKE 3542

PROJECT PROJET

SPEC TYPE

NOTES

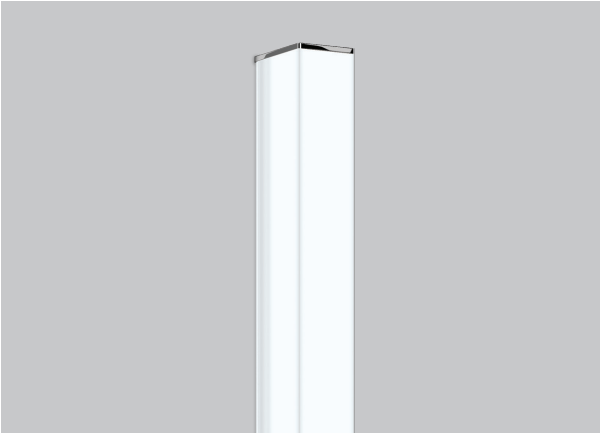


FAMILY FAMILLE



3542

74042

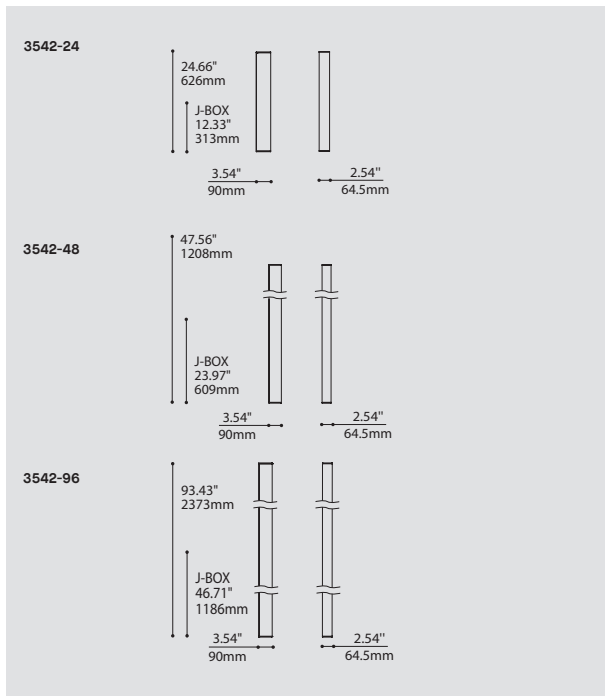

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

3542-24 STROKE 24"
 3542-48 STROKE 48"
 3542-96 STROKE 96"

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, OTHER INFO)

3542-24
 LED.9 9W, LED
 LED.17 17W, LED HO
 3542-48
 LED.17 17W, LED
 LED.34 34W, LED HO
 3542-96
 LED.34 34W, LED
 LED.68 68W, LED HO

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K
 35 3500K
 40 4000K

VOLTAGE VOLTAGE

120V 120 VOLT
 277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120-277V)
 LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT.

DV

DIFFUSER FINISH FINI DIFFUSEUR

FRO FROSTED

FRO

END CAP FINISH FINI EMBOUT

CHR CHROME
 WHE WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3980 MINI JUNCTION BOX
 3984 SURFACE MOUNTING PLATE
 ACCESSORY IS MANDATORY, PLEASE SPECIFY YOUR ACCESSORY TYPE.

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: Clean, sleek and slender profile with an encasing diffuser and minimal structure. Available in several lengths and ADA compliant.

LIGHT SOURCE: High performance custom made LED strips with standard 0-10V dimming driver integrated within the fixture.

STRUCTURE: Extruded aluminum structure with precision machined end caps mechanically attached to the structure without any exposed fasteners.

DIFFUSER: Custom blended and extruded acrylic composite lens with snap-fit assembly.

CERTIFIED: c-CSA-us


CONCEPTION: Profil mince et élégant entouré d'un diffuseur avec une structure minimaliste. Offert en différentes longueurs et conforme à la norme ADA.

SOURCE LUMINEUSE: Modules DEL haute performance conçus et fabriqués sur mesure avec un convertisseur à gradation 0-10V intégré à même le luminaire.

STRUCTURE: Structure d'aluminium extrudé, embouts usinés se fixant à la structure sans attache visible.


DIFFUSEUR: Lentille de composite d'acrylique extrudé et assemblée par encliquetage.

CERTIFIÉ: c-CSA-us

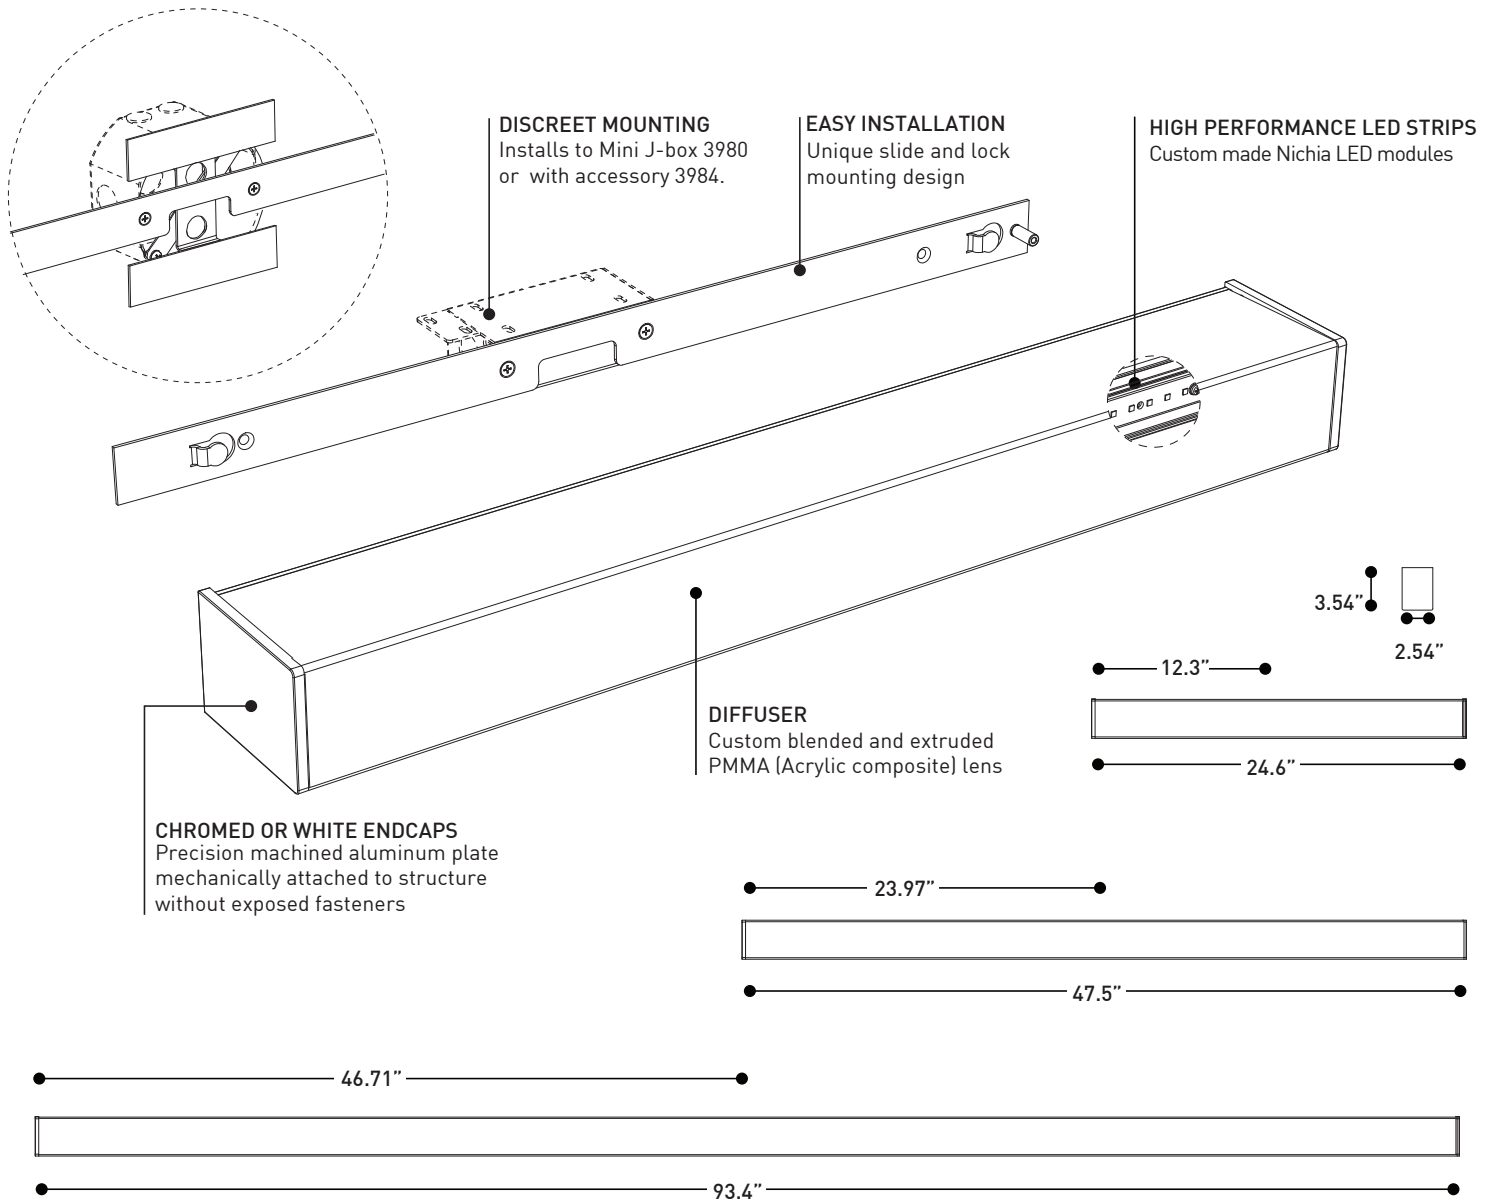

SPECIFICATIONS

	3542-24	3542-24 HO	3542-48	3542-48 HO	3542-96	3542-96 HO
LIGHT SOURCE	48 x Nichia mid power LED		96 x Nichia mid power LED		192 x Nichia mid power LED	
MODULE	UL Recognized - Made in USA					
DELIVERED LUMENS	~923lm	~1687lm	~1806lm	~3483lm	~3488lm	~6615lm
LUMENS PER FOOT	~461.5lm	~843lm	~451lm	~870lm	~436lm	~826lm
SYSTEM WATTAGE	9.4W	19.8W	18.4W	40.4W	37.4W	77.2W
DIMMING	Standard 0-10V dimming (DV)					
CRI	85 CRI (Typical)					
ENDCAPS	Chromed or white machined aluminum endcaps					
DIFFUSER	Custom extruded high performance diffuser					
VOLTAGE	120V - 277V					
LIGHT DISTRIBUTION	Semi-Direct					
WARRANTY	5 years					

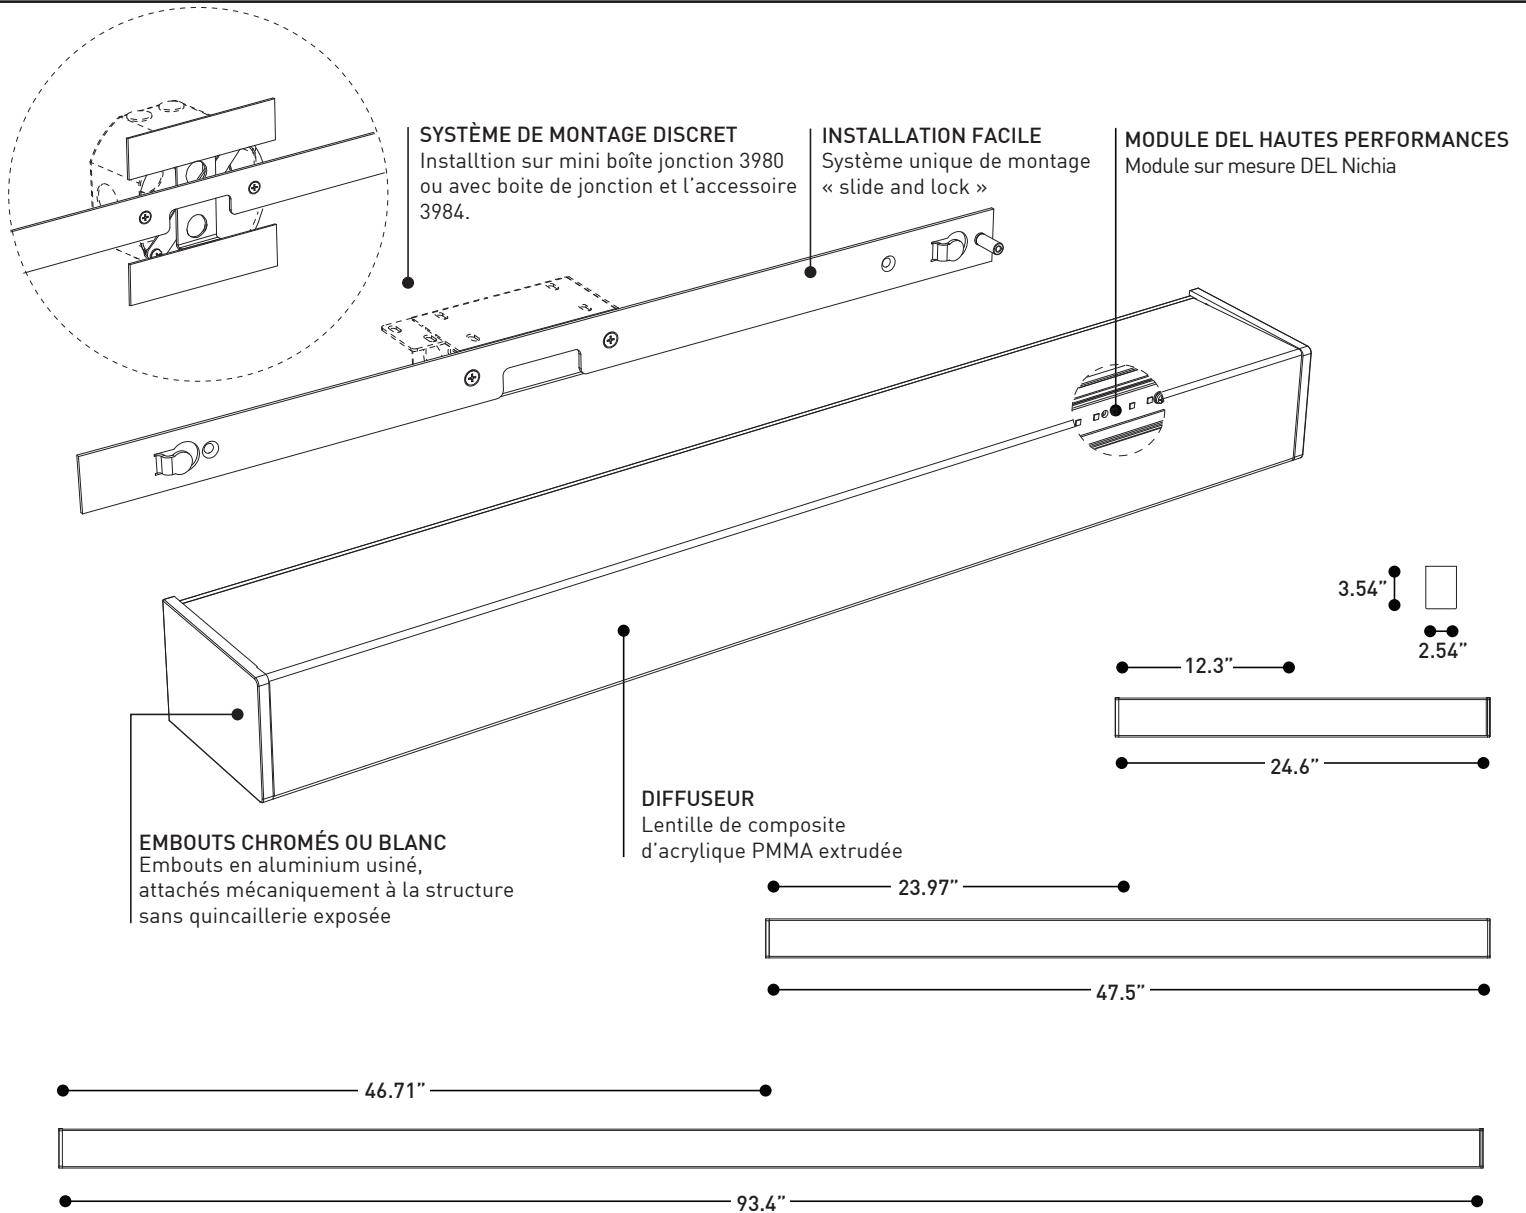

SPÉCIFICATIONS	3542-24	3542-24 HO	3542-48	3542-48 HO	3542-96	3542-96 HO
SOURCE LUMINEUSE	48 x DEL mi-puissance		96 x DEL mi-puissance		192 x DEL mi-puissance	
MODULE	Reconnu UL - Fabriqué aux États-Unis					
LUMENS (LIVRÉS)	~923lm	~1687lm	~1806lm	~3483lm	~3488lm	~6615lm
LUMENS PAR PIED	~461.5lm	~843lm	~451lm	~870lm	~436lm	~826lm
WATTAGE DU SYSTEM	9.4W	19.8W	18.4W	40.4W	37.4W	77.2W
DIMMING	Standard 0-10V DIM					
CRI	85 CRI (Typique)					
EMBOUS	Embouts chromés ou blanc en aluminium usiné					
DIFFUSEUR	Diffuseur extrudé de haute performance fait sur mesure					
VOLTAGE	120V - 277V					
DISTRIBUTION LUMINEUSE	Semi-Directe					
GARANTIE	5 ans					