

# STROKE 3542

PROJECT PROJET

SPEC TYPE

NOTES




FAMILY FAMILLE



3542 (WALL)

74042

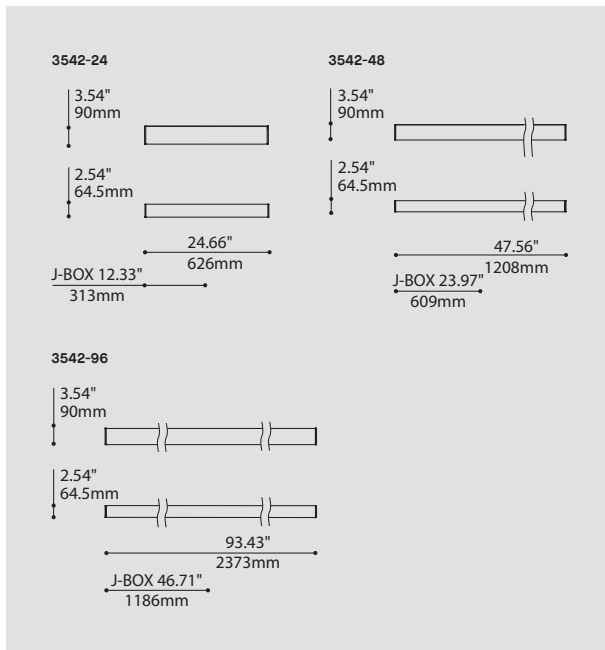

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

### MODEL MODÈLE

3542-24 STROKE 24"  
3542-48 STROKE 48"  
3542-96 STROKE 96"

### LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, OTHER INFO)

3542-24  
LED.9 9W, LED  
LED.17 17W, LED HO  
  
3542-48  
LED.17 17W, LED  
LED.34 34W, LED HO  
  
3542-96  
LED.34 34W, LED  
LED.68 68W, LED HO

### COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K  
35 3500K  
40 4000K

### VOLTAGE VOLTAGE

120V 120 VOLT  
277V 277 VOLT

### DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120-277V)  
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT.

### DIFFUSER FINISH FINI DIFFUSEUR

FRO FROSTED

### END CAP FINISH FINI EMBOUT

CHR CHROME  
WHE WHITE FINE TEXTURE


### ACCESSORY ACCESSOIRE

3980 MINI JUNCTION BOX  
3984 SURFACE MOUNTING PLATE  
ACCESSORY IS MANDATORY, PLEASE SPECIFY YOUR ACCESSORY TYPE.

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** Clean, sleek and slender profile with an encasing diffuser and minimal structure. Available in several lengths.
- LIGHT SOURCE:** High performance custom made LED strips with standard 0-10V dimming driver integrated within the fixture.
- STRUCTURE:** Extruded aluminum structure with precision machined end caps mechanically attached to structure without any exposed fasteners.
- DIFFUSER:** Custom blended and extruded acrylic composite lens with snap-fit assembly.
- CERTIFIED:** c-CSA-us
- CONCEPTION:** Profil mince et élégant entouré d'un diffuseur avec une structure minimaliste. Offert en différentes longueurs.
- SOURCE LUMINEUSE:** Modules DEL haute performance conçus et fabriqués sur mesure avec un convertisseur à gradation 0-10V intégré à même le luminaire.
- STRUCTURE:** Structure d'aluminium extrudé, embouts usinés se fixant à la structure sans fixation visible.
- DIFFUSEUR:** Lentille de composite d'acrylique extrudé et assemblée par encliquetage.
- CERTIFIÉ:** c-CSA-us

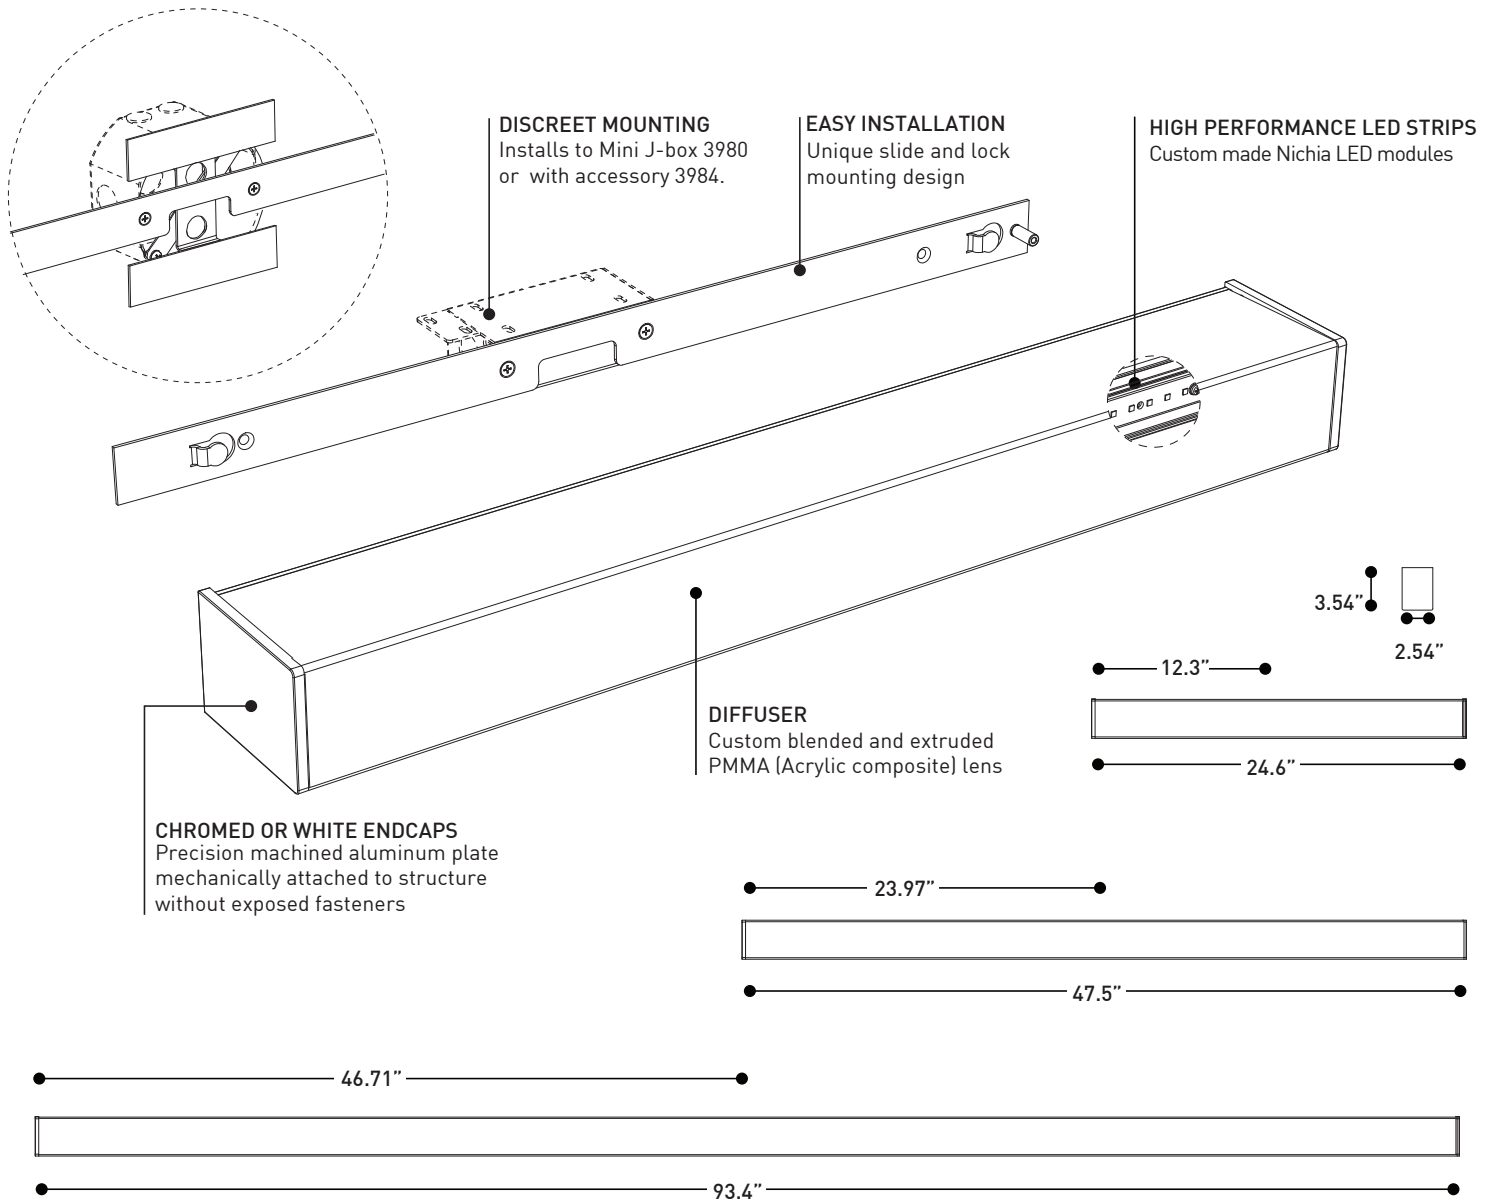

## SPECIFICATIONS

	3542-24	3542-24 HO	3542-48	3542-48 HO	3542-96	3542-96 HO
LIGHT SOURCE	48 x Nichia mid power LED		96 x Nichia mid power LED		192 x Nichia mid power LED	
MODULE	UL Recognized - Made in USA					
DELIVERED LUMENS	~923lm	~1687lm	~1806lm	~3483lm	~3488lm	~6615lm
LUMENS PER FOOT	~461.5lm	~843lm	~451lm	~870lm	~436lm	~826lm
SYSTEM WATTAGE	9.4W	19.8W	18.4W	40.4W	37.4W	77.2W
DIMMING	Standard 0-10V dimming (DV)					
CRI	85 CRI (Typical)					
ENDCAPS	Chromed or white machined aluminum endcaps					
DIFFUSER	Custom extruded high performance diffuser					
VOLTAGE	120V - 277V					
LIGHT DISTRIBUTION	Semi-Direct					
WARRANTY	5 years					

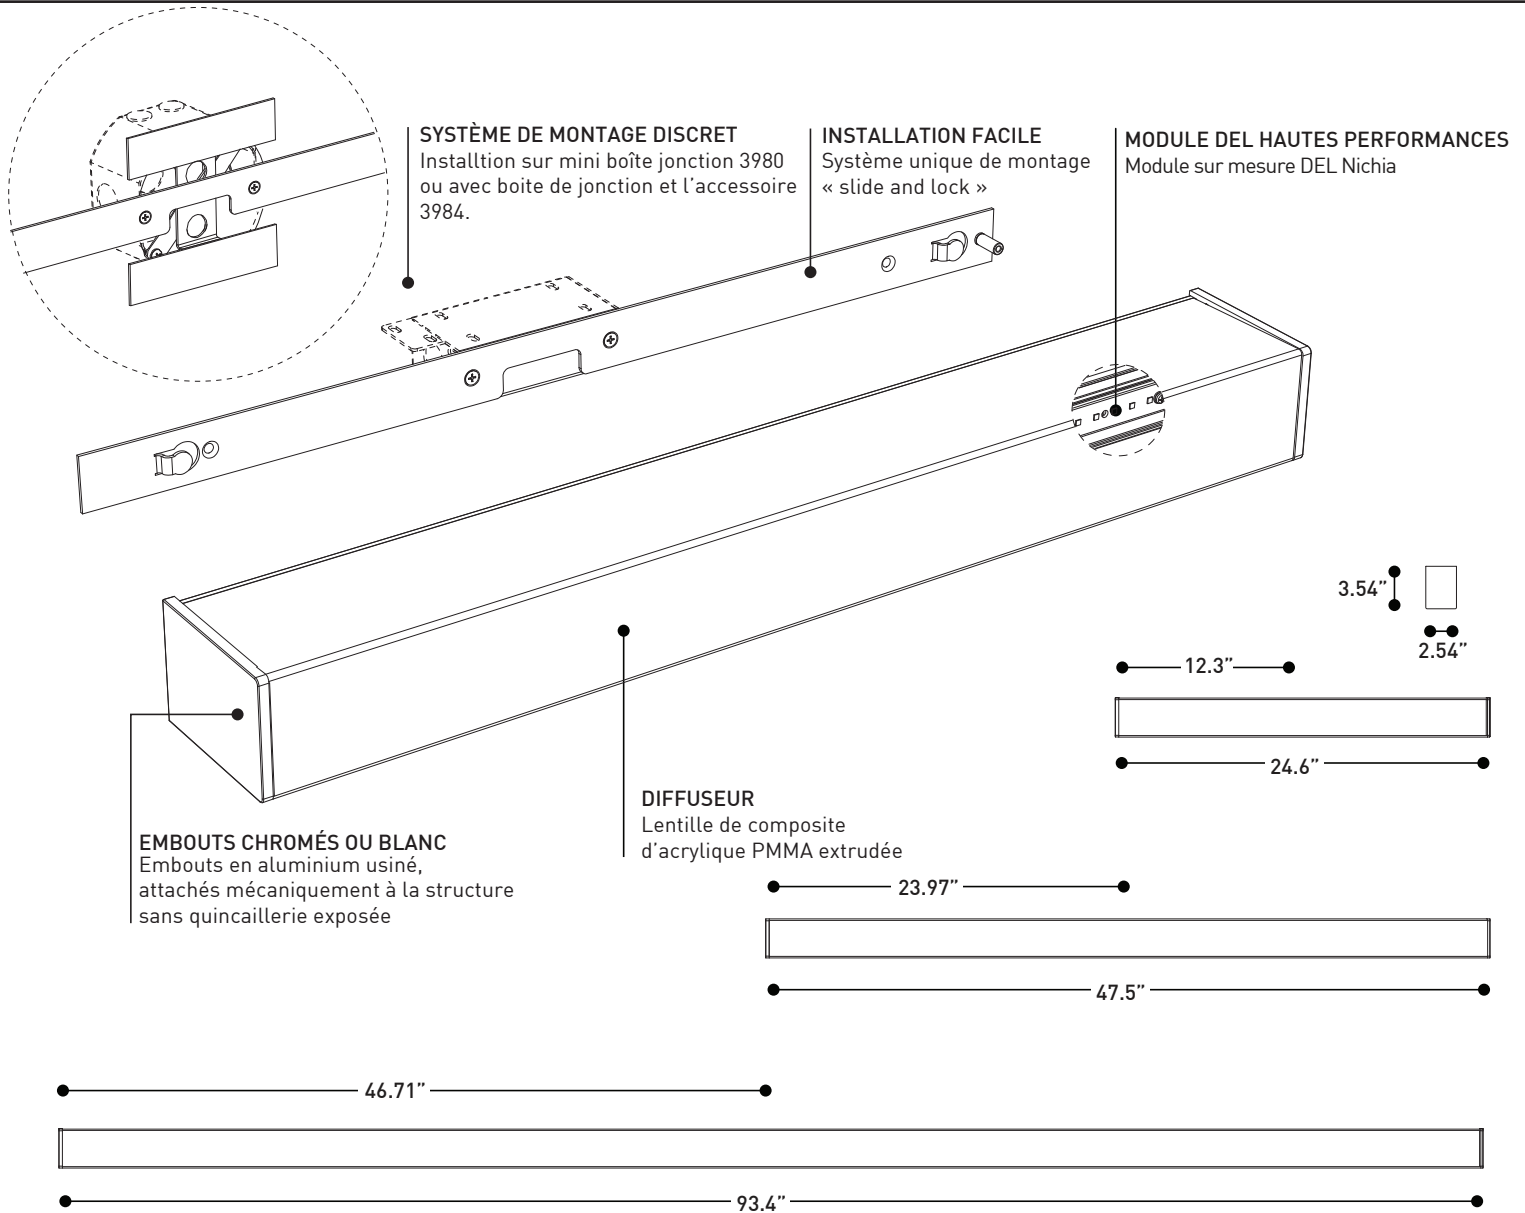

SPÉCIFICATIONS	3542-24	3542-24 HO	3542-48	3542-48 HO	3542-96	3542-96 HO
SOURCE LUMINEUSE	48 x DEL mi-puissance		96 x DEL mi-puissance		192 x DEL mi-puissance	
MODULE	Reconnu UL - Fabriqué aux États-Unis					
LUMENS (LIVRÉS)	~923lm	~1687lm	~1806lm	~3483lm	~3488lm	~6615lm
LUMENS PAR PIED	~461.5lm	~843lm	~451lm	~870lm	~436lm	~826lm
WATTAGE DU SYSTEM	9.4W	19.8W	18.4W	40.4W	37.4W	77.2W
DIMMING	Standard 0-10V DIM					
CRI	85 CRI (Typique)					
EMBOUS	Embouts chromés ou blanc en aluminium usiné					
DIFFUSEUR	Diffuseur extrudé de haute performance fait sur mesure					
VOLTAGE	120V - 277V					
DISTRIBUTION LUMINEUSE	Semi-Directe					
GARANTIE	5 ans					