

BOLT 3544

PROJECT PROJÉT
SPEC TYPE
NOTES




FAMILY FAMILLE



3544

74044

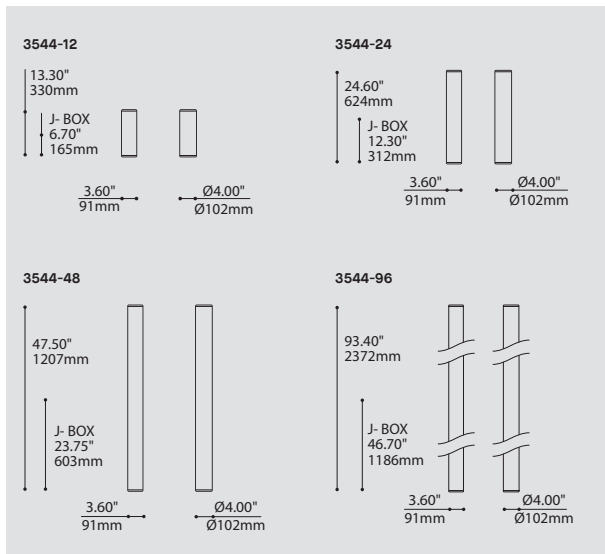

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE


CODE

MODEL MODÈLE		
3544-12	BOLT 12"	
3544-24	BOLT 24"	
3544-48	BOLT 48"	
3544-96	BOLT 96"	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)		
3544-12		
LED.8		8W, LED
3544-24		
LED.17		17W, LED
3544-48		
LED.34		34W, LED
3544-96		
LED.68		68W, LED
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30		3000K
35		3500K
40		4000K
VOLTAGE VOLTAGE		
120V		120 VOLT
277V		277 VOLT
DIMMING OPTION OPTION DE GRADATION		DV
DV		0-10V DIMMING (120-277V) LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT.
DIFFUSER FINISH FINI DIFFUSEUR		FRO
FRO		FROSTED
END CAP FINISH FINI EMBOUT		
CHR		CHROME
WHE		WHITE FINE TEXTURE
ACCESSORY ACCESSOIRE		
3980		MINI JUNCTION BOX (PROVIDED FOR 3544-24, 3544-48, 3544-96)
3980B		MINI JUNCTION BOX 6" (PROVIDED FOR 3544-12)
3984		SURFACE MOUNTING PLATE ACCESSORY IS MANDATORY, PLEASE SPECIFY YOUR ACCESSORY TYPE.


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	A bold yet elegant linear profile with a white glowing appearance and hidden mechanical structure. Offered in various lengths and ADA compliant.
INSTALLATION:	Discreet mounting bracket with slide and lock features which installs onto included mini junction box 3980 or 3980B.
LIGHT SOURCE:	High performance custom made LED strips with standard 0-10V dimming driver integrated within the fixture.
STRUCTURE:	Extruded aluminum structure, die casted aluminum end caps mechanically attached without any visible fasteners.
DIFFUSER:	Custom extruded PMMA diffuser with internal light spreading sheet for optimal light diffusion.
CERTIFIED:	c-CSA-us
CONCEPTION:	Un profil linéaire audacieux et élégant avec une grande surface lumineuse et une structure mécanique minimisée. Offert en plusieurs longueurs et conforme à la norme ADA.
INSTALLATION:	Support de fixation discret avec un système unique «slide & lock» qui s'installe sur la mini boîte de jonction 3809 ou 3980B incluse.
SOURCE LUMINEUSE:	Modules DEL à haute performance conçus et fabriqués sur mesure incluant une unité d'alimentation DEL à gradation 0-10V standard intégrée dans le luminaire.
STRUCTURE:	Structure d'aluminium extrudé, embouts moulés sous pression et se fixant sans attache visible.
DIFFUSEUR:	Diffuseur d'acrylique PMMA extrudé sur mesure additionné d'une feuille diffusante interne pour une distribution lumineuse optimale.
CERTIFIÉ:	c-CSA-us

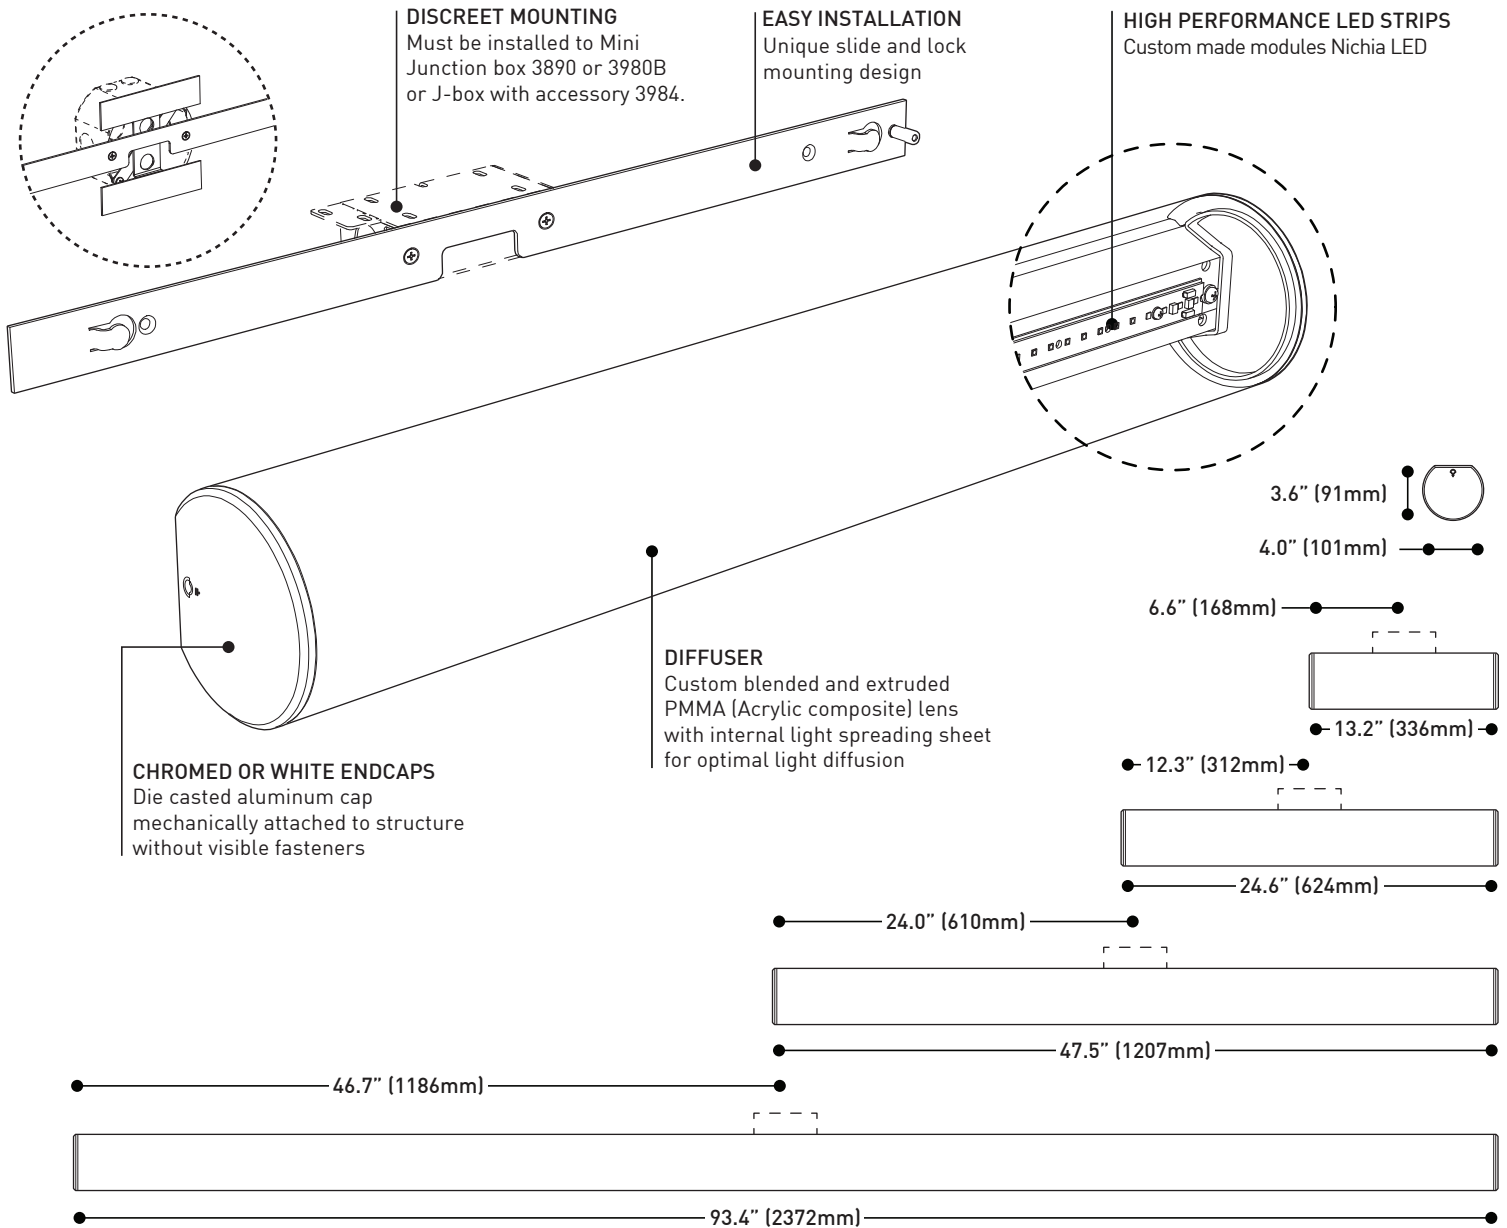

SPECIFICATIONS	3544-12	3544-24	3544-48	3544-96
LIGHT SOURCE	24x Mid-Power LED	48x Mid-Power LED	96x Mid-Power LED	192x Mid-Power LED
MODULE	UL Recognized - Made in USA			
LUMENS PER FOOT	~1000lm (4000K)			
DELIVERED LUMENS	~965lm (4000K)	~1990lm (4000K)	~4035lm (4000K)	~8107lm (4000K)
FIXTURE SYSTEM WATTAGE	10.1W	20.2W	40.3W	80.6W
DIMMING	Standard 0-10V dimming at 1% standard			
CRI	85 CRI (typical)			
VOLTAGE	120V - 277V			
STRUCTURE	Custom aluminum extrusion with chrome or white die casted aluminum endcaps			
DIFFUSER	Custom extruded PMMA diffuser with internal light spreading sheet			
WARRANTY	5 years			
NOTE ON DIMMING	The 3544-12 configuration may dim at a different level than other available configurations			

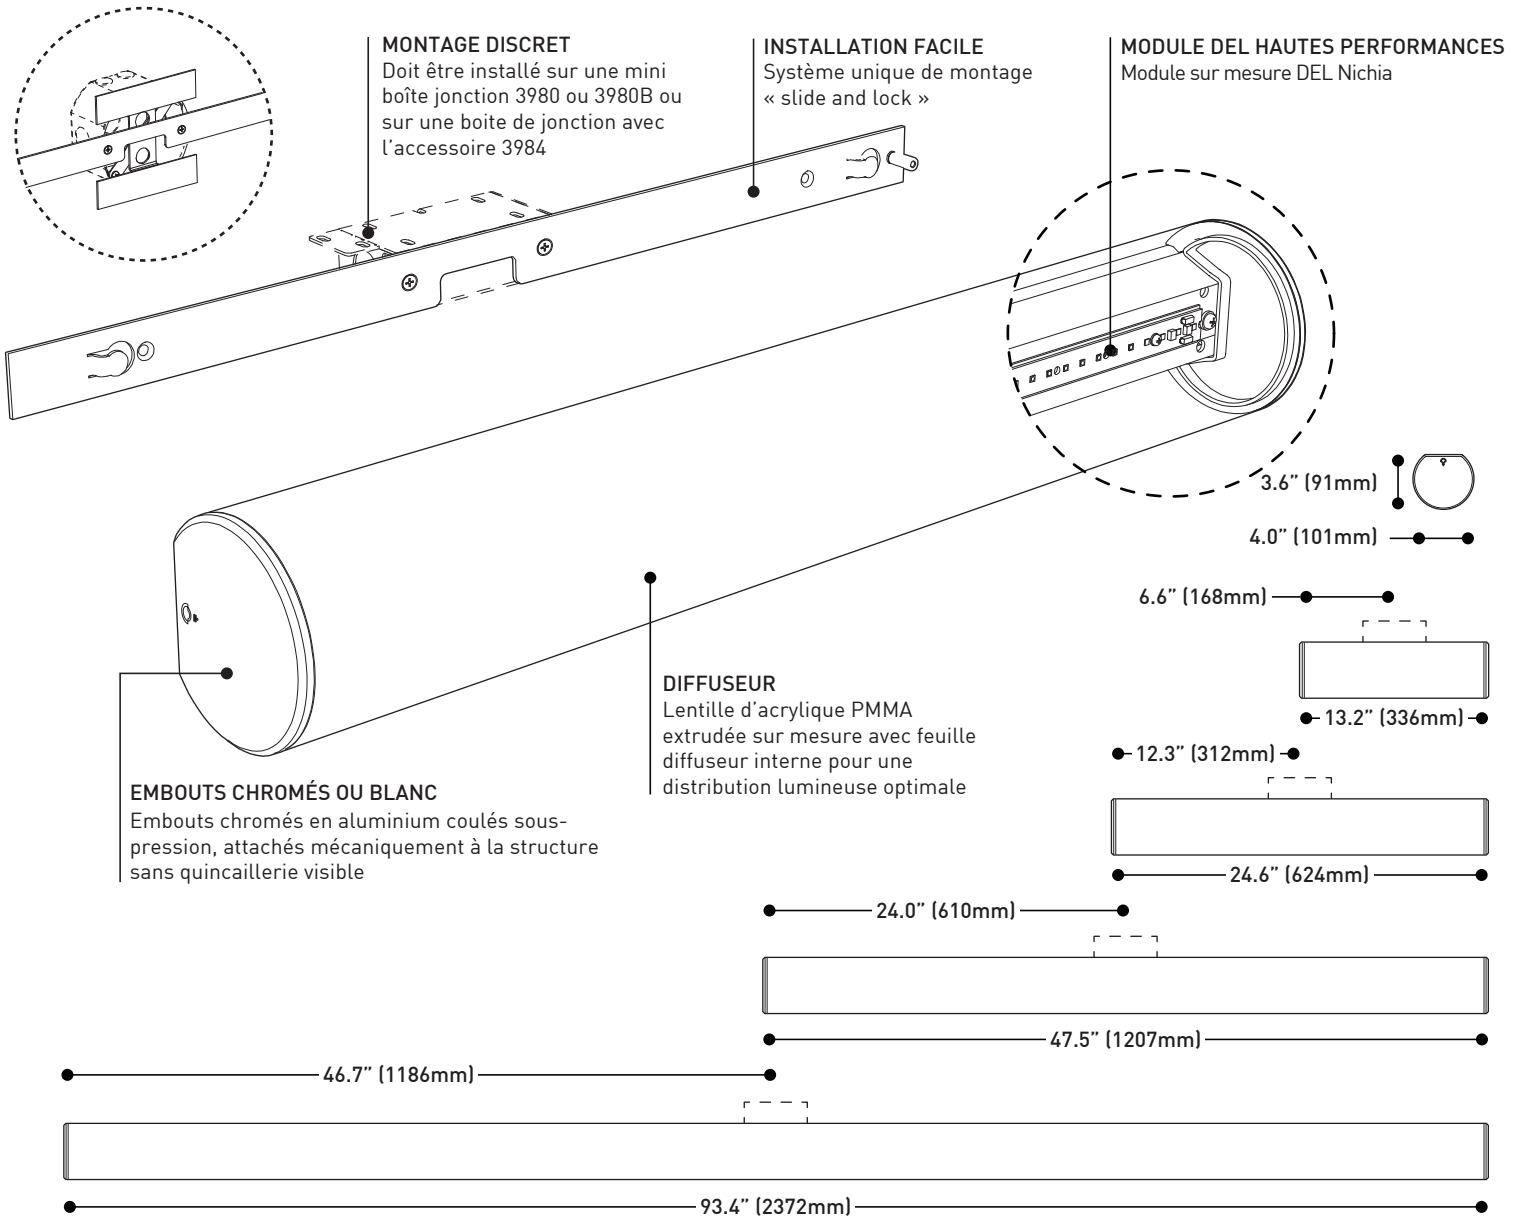

SPECIFICATIONS	3544-12	3544-24	3544-48	3544-96
SOURCE LUMINEUSE	24x DEL mi-puissance	48x DEL mi-puissance	96x DEL mi-puissance	192x DEL mi-puissance
MODULE	Reconnu UL - Fabriqué aux É.-U.			
LUMENS PAR PIED	~1000lm (4000K)			
LUMENS LIVRÉS	~965lm (4000K)	~1990lm (4000K)	~4035lm (4000K)	~8107lm (4000K)
PUISSANCE DU LUMINAIRE	10.1W	20.2W	40.3W	80.6W
GRADATION	Gradation 0-10V standard à 1%			
IRC	85 IRC (typique)			
VOLTAGE	120V - 277V			
STRUCTURE	Extrusion d'aluminium sur mesure avec embouts en aluminium coulés sous-pression (chromé ou peint blanc)			
DIFFUSEUR	Extrusion d'acrylique PMMA sur mesure avec feuille de diffusion lumineuse interne			
GARANTIE	5 ans			
NOTE SUR LE GRADATION	La configuration 3544-12 pourrait graduer à un niveau différent des autres configurations offertes			