


FLARE 3550B

PROJECT PROJET

SPEC TYPE

NOTES

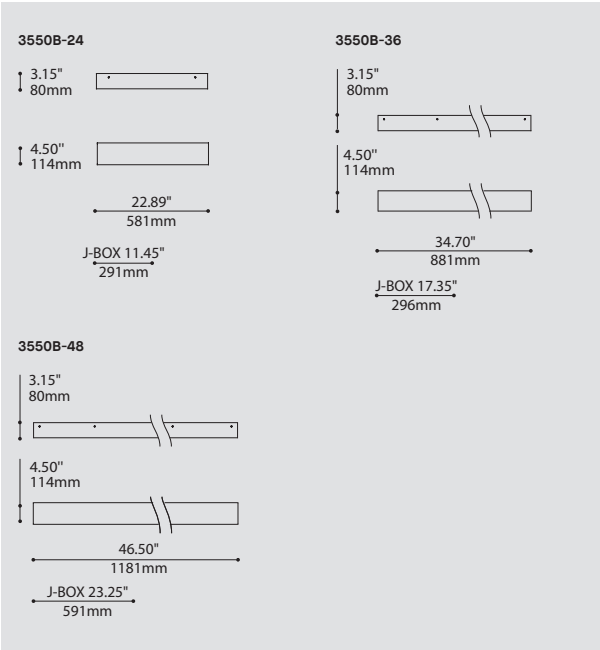

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

3550B

3550B DOUBLE FLARE

LUMINAIRE LENGTH LONGUEUR LUMINAIRE

24 24"
36 36"
48 48"

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

3550B-24

2XF.T5.14 14W X 2, T5

2XF.T5.24 24W X 2, T5 HO

3550B-36

2XF.T5.21 21W X 2, T5

2XF.T5.39 39W X 2, T5 HO

3550B-48

2XF.T5.28 28W X 2, T5

2XF.T5.54 54W X 2, T5 HO

VOLTAGE VOLTAGE

120V 120 VOLT

277V 277 VOLT

347V* 347 VOLT

*ONLY AVAILABLE WITH 2XF.T5.54 (NON-DIMMING BALLAST)

DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH 2XF.T5.24 AND 2XF.T5.54 ONLY

DM1 ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST

AVAILABLE WITH 2XF.T5.14, 2XF.T5.21, 2XF.T5.28 AND 2XF.T5.54

DM7 ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST

AVAILABLE WITH ALL T5 LIGHT SOURCES

D3D LUTRON HI-LUME 3D ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)

D33 LUTRON HI-LUME 3D ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)

EMERGENCY BATTERY BATTERIE D'URGENCE

AVAILABLE WITH ALL T5 LIGHT SOURCES. 120V OR 277V ONLY, NOT AVAILABLE WITH A DIMMING BALLAST

REM RECESSED EMERGENCY BATTERY

DIFFUSER FINISH FINI DIFFUSEUR

FRO FROSTED

FRO

ACCESSORY ACCESSOIRE

3981B JUNCTION BOX FOR T5 REMOTE EMERGENCY BATTERY

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

ADA BIM DIM IES REM

DESIGN:

Slim and modern rectangular profile available in several lengths.

LIGHT SOURCE:

Highly efficient fluorescent T5 and T5 HO light sources. Dimming and Emergency available.

STRUCTURE:

Structure in extruded aluminum & die-stamped steel. Injection moulded plastic end caps.

DIFFUSER:

Machined & frosted acrylic housing with snap-fit, extruded micro-prism acrylic lens.

CERTIFIED:

c-UL-us

FAMILY FAMILLE



3550B (WALL)



74040B