



CYCLE 3800

PROJECT PROJÉT
SPEC TYPE
NOTES

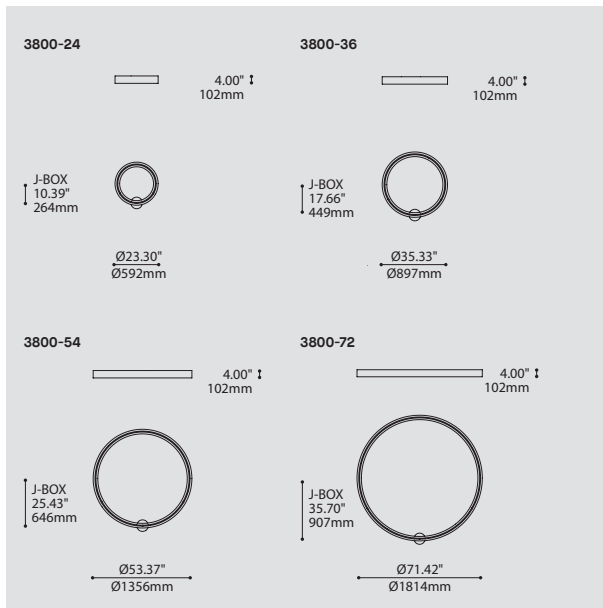

OPTIONS

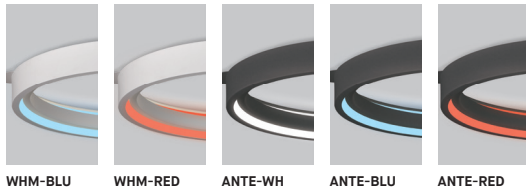

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
3800-24	CYCLE 24"	
3800-36	CYCLE 36"	
3800-54	CYCLE 54"	
3800-72	CYCLE 72"	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)		
3800-24		
LED	☰ LED REGULAR OUTPUT	
LED.HO	☰ LED HIGH OUTPUT	
3800-36		
LED	☰ LED REGULAR OUTPUT	
LED.HO	☰ LED HIGH OUTPUT	
3800-54		
LED	☰ LED REGULAR OUTPUT	
LED.HO	☰ LED HIGH OUTPUT	
3800-72		
LED	☰ LED REGULAR OUTPUT	
LED.HO	☰ LED HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120-277 VOLT)	
DP	PHASE DIMMING (120V)	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT.	
DRIVER POSITION POSITION DU PILOTE		RDP
RDP	RECESSED DRIVER*	
	*3981C (3800-24, 3800-36, 3800-54 (REG), 3800-72 (REG)) OR 3981D (3800-54 (HO), 3800-72 (HO)) ACCESSORY IS REQUIRED. RECESSED DRIVER POSITION IS STANDARD IN THIS PRODUCT	
CANOPY FINISH FINI PAVILLON		WHM
WHM	MATTE WHITE	
RING FINISH FINI ANNEAU		
WHM	MATTE WHITE	
ANTE	ANTHRACITE FINE TEXTURE	
OPTIONAL INSIDE FINISH OF EXTERNAL RING FINI INTERNE OPTIONNEL DE L'ANNEAU EXTÉRIEUR		
IF NO FINISH IS SELECTED THE INSIDE FINISH OF THE EXTERNAL RING WILL BE WHITE		
BLU	BLUE	
RED	RED	
ACCESSORY ACCESSOIRE		
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION (FOR 3800-24, 3800-36, 3800-54 (REG), 3800-72 (REG))	
3981D	JUNCTION BOX FOR RECESSED DRIVER OPTION (FOR 3800-54 (HO), 3800-72 (HO))	



PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




DESIGN:	The perfectly diffused direct /indirect illumination of Cycle create a luminous halo that fills large spaces with presence and simplicity.
STRUCTURE:	Seamlessly finished, rolled concentric aluminum extrusions with powder coat finish.
CERTIFIED:	c-CSA-us
CONCEPTION:	L'éclairage direct/indirect diffus du Cycle crée un halo lumineux occupant l'espace avec simplicité et grandeur.
STRUCTURE:	Structure d'extrusions d'aluminium cintrées concentriques avec peinture électrostatique.
CERTIFIÉ:	c-CSA-us



RECOGNIZED WINNER

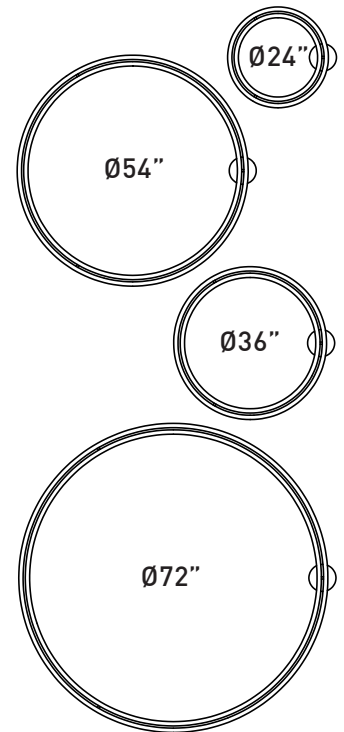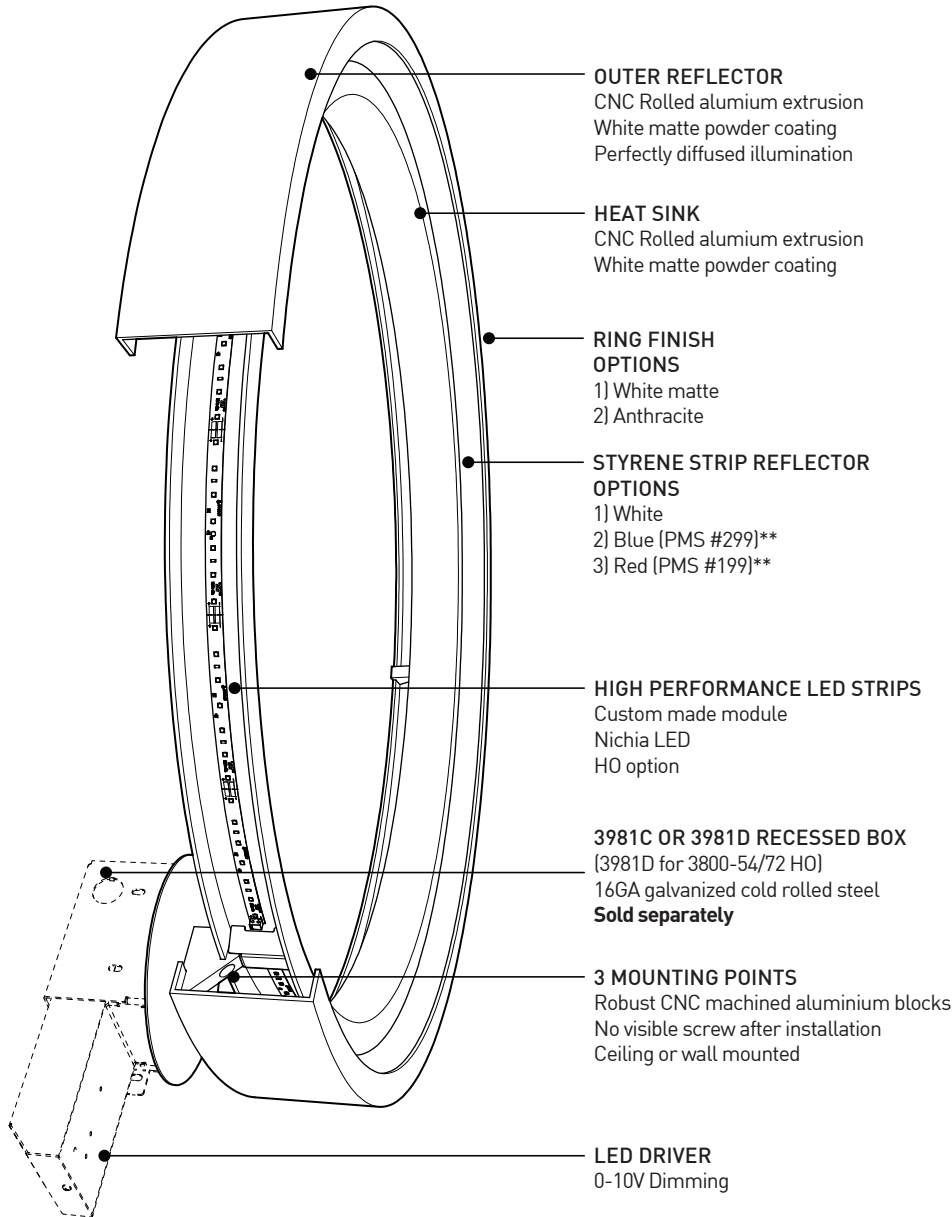

4 VERSATILE SIZES
An infinite number of possible layouts
From the smallest to the largest space



CEILING OR WALL MOUNTED

CHARACTERISTICS	3800-24	3800-36	3800-54	3800-72
LIGHT SOURCE	117x Nichia	195x Nichia	312x Nichia	429x Nichia
DELIVERED LUMENS	~1645 lm (4000K)	~2772 lm (4000K)	~4470 lm (4000K)	~6155 lm (4000K)
SYSTEM WATTAGE	~21W	~34W	~54W	~73W
LIGHT SOURCE (HO)	117x Nichia ± 41W	195x Nichia ± 69W	312x Nichia ± 110W	429x Nichia ± 127W
DELIVERED LUMENS (HO)	~3287 lm (4000K)	~5547 lm (4000K)	~8944 lm (4000K)	~11691 lm (4000K)
SYSTEM WATTAGE	~48W	~78W	~126W	~144W
MODULE	UL Recognized - Custom design flexible strip - Made in USA			
CRI	85 CRI (typical)			
STRUCTURE	Custom CNC rolled aluminium extrusions (0.125in thickness) / Seamless welding			
LIGHT DISTRIBUTION	Direct/Indirect 50/50			
VOLTAGE*	120V or 277V or 347V*	120V or 277V or 347V*	120V or 277V or 347V*	120V or 277V
DIMMING	0-10V Dimming (standard with this fixture)			
WARRANTY	5 years			
WEIGHT (PACKED)	35 lbs	50 lbs	75 lbs	100 lbs

* 347V not available for HO option

** Color may vary slightly as it will be affected by the color temperature of the light and by the saturation/reflection onto the colored surface



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com





3800-24 | 3800-36
3800-54 | 3800-72



RECOGNIZED WINNER




NGL 2014

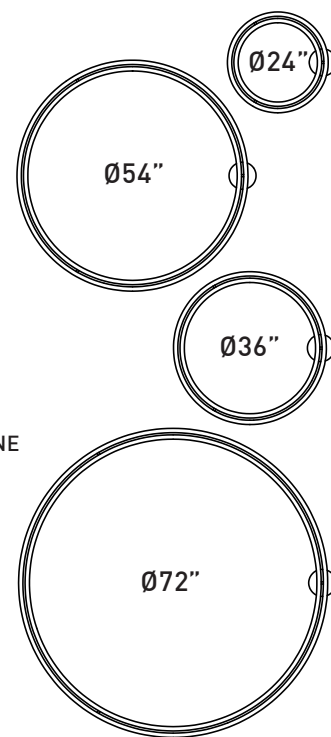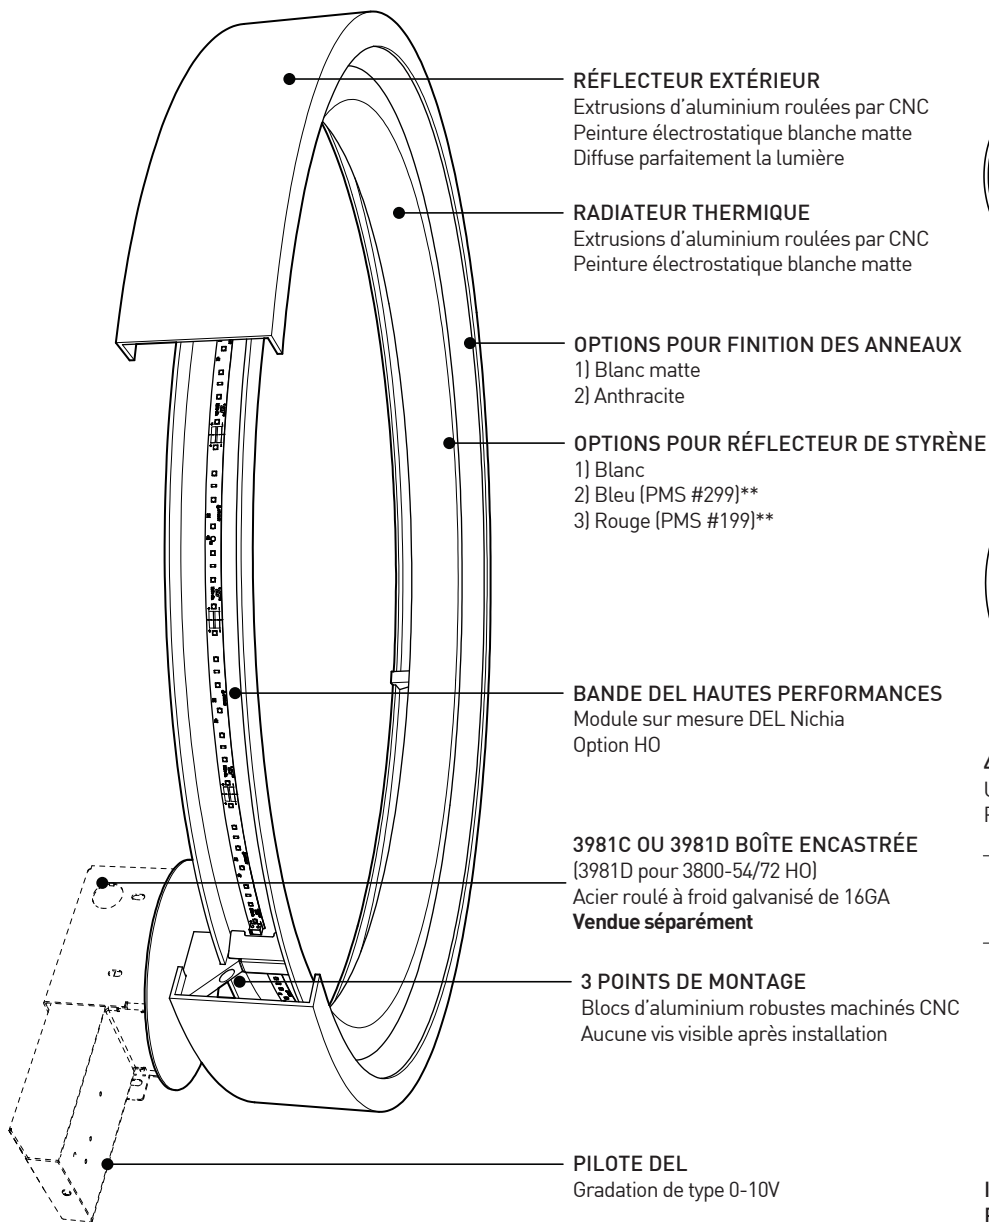

4 FORMATS POLYVALENTS

Une infinité de combinaisons possibles
Pour les petits aux plus grands espaces

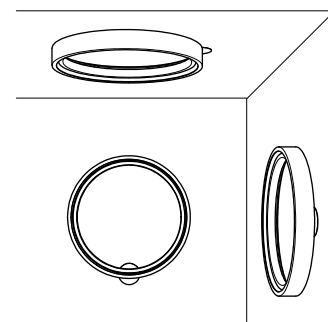

INSTALLATION MURALE OU EN PLAFONNIER

CARACTÉRISTIQUES	3800-24	3800-36	3800-54	3800-72
SOURCE LUMINEUSE	117x Nichia	195x Nichia	312x Nichia	429x Nichia
LUMENS REELS	~1645 lm (4000K)	~2772 lm (4000K)	~4470 lm (4000K)	~6155 lm (4000K)
CONSOMMATION TOTALE	~21W	~34W	~54W	~73W
SOURCE LUMINEUSE (HO)	117x Nichia ± 41W	195x Nichia ± 69W	312x Nichia ± 110W	858x Nichia ± 127W
LUMENS REELS (HO)	~3287 lm (4000K)	~5547 lm (4000K)	~8944 lm (4000K)	~11691 lm (4000K)
CONSOMMATION TOTALE	~48W	~78W	~126W	~144W
MODULE	Reconnu UL - Bandes DEL sur mesure - Fabriqué aux États-Unis			
IRC	85 IRC (typique)			
STRUCTURE	Extrusions d'aluminium roulées par CNC (0.125po d'épaisseur) / joints de soudure invisibles			
DISTRIBUTION LUMINEUSE	Direct/Indirect 50/50			
VOLTAGE*	120V ou 277V ou 347V*	120V ou 277V ou 347V*	120V ou 277V ou 347V*	120V ou 277V
GRADATION	Gradation 0-10V (standard avec ce luminaire)			
GARANTIE	5 ans			
POIDS (EMBALLÉ)	35 lbs	50 lbs	75 lbs	100 lbs

* 347V pas disponible pour l'option HO

** La couleur peut varier en fonction de la température lumineuse choisie et de la saturation / réflexion sur la surface colorée



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



3800-24 | 3800-36
3800-54 | 3800-72