


BROADWAY 4211-GGL

PROJECT PROJÉT
SPEC TYPE
NOTES



OPTIONS

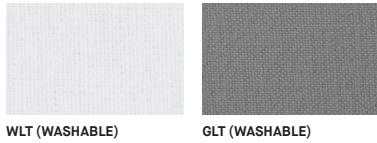

OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	INC TRACK CIRCUIT	INC	LED	CFL	CFL DIM
MOUNTING	2734B	2401E	2403G	2402G	2402J
CABLE	71.65"	71.30"	71.80"	72.05"	48.55"
STEM	47.05"	46.70"	-	47.45"	47.95"


MOUNTING OPTIONS OPTIONS DE MONTAGE

2734B	2401E	2403G	2402G	2402J
1.46" x 1.36" 37 x 35mm	Ø4.50" x 1.00" Ø114 x 25mm	Ø4.50" x 1.50" Ø114 x 38mm	Ø5.25" x 1.75" Ø133 x 44mm	Ø5.25" x 2.25" Ø133 x 57mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS


STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CÂBLE

STEM STD 36" 914mm	CABLE STD 60" 1523mm	3 x AC CABLE STD 60" 1523mm
--------------------------	----------------------------	-----------------------------------

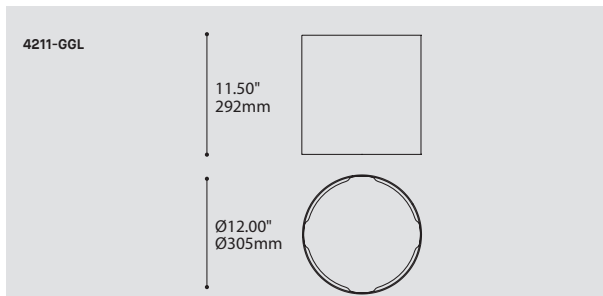


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE


MODEL MODÈLE	4211-GGL	BROADWAY	CODE	4211-GGL
LIGHT SOURCE SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)			
CF.D.13*		13W, CFL, DOUBLE TWIN TUBE, G24Q1 BASE		
CF.D.18*		18W, CFL, DOUBLE TWIN TUBE, G24Q2 BASE		
CF.T.26*		26W, CFL, TRIPLE TWIN TUBE, G24Q3 BASE		
INC.100		100W, INC, A19 / HAL T10, MEDIUM BASE (120V ONLY)		
LED.10*		10W, LED		
		*NOT AVAILABLE WITH A TRACK ADAPTOR		
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	FOR LED ONLY			
30		3000K		
35		3500K		
40		4000K		
VOLTAGE VOLTAGE	FOR LED ONLY			
120V		120 VOLT		
277V*		277 VOLT		
347V**		347 VOLT		
		*NOT AVAILABLE WITH A TRACK ADAPTOR		
		**ONLY AVAILABLE WITH CF.D.13, CF.D.18 AND CF.T.26 (NON-DIMMING BALLAST)		
DIMMING OPTION OPTION DE GRADATION	AVAILABLE WITH CF.D.18 AND CF.T.26 ONLY, MAXIMUM 36" STEM / CABLE LENGTH			
DED		LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)		
DE3		LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)		
		AVAILABLE WITH LED ONLY		
DV		0-10V DIMMING (120-277V)		
DP		PHASE DIMMING (120V ONLY)		
		LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
STEM OR CABLE TIGE OU CÂBLE	AVAILABLE WITH LED ONLY			
S6*		1/4" (6MM) STEM, FIELD ADJUSTABLE (NOT AVAILABLE WITH CFL LAMPS)		
S10*		3/8" (10MM) STEM, NOT FIELD ADJUSTABLE (FOR CFL LAMPS ONLY)		
C*		CLEAR CABLE, FIELD ADJUSTABLE		
AC**		AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE (FOR LED LAMPS ONLY)		
		*NOT AVAILABLE WITH LED LIGHT SOURCE		
		**NOT AVAILABLE WITH A TRACK ADAPTOR		
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CÂBLE	AVAILABLE WITH LED ONLY			
36		36" STEM (STD LENGTH)		
60		60" CABLE OR AIRCRAFT CABLE (STD LENGTH)		
**		CUSTOM STEM LENGTH (PLEASE SPECIFY)		
**		CUSTOM CABLE OR AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)		
		FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING MONTAGE	AVAILABLE WITH LED ONLY			
RC		ROUND CANOPY / PAVILLON ROND FOR INC: 1.00" CANOPY (2401E) FOR DIMMING LED: 1.75" CANOPY (2403G) FOR CFL: 1.75" CANOPY (2402G) FOR DIMMING CFL: 2.25" CANOPY (2402J)		
TA1		TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT INC 120V ADAPTOR (2734B)		
MOUNTING OPTION OPTION DE MONTAGE	AVAILABLE WITH LED ONLY			
SCA*		SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)		
		*ONLY AVAILABLE WITH A STEM		
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL (A)	AVAILABLE WITH LED ONLY			
WH		WHITE		
BLK		BLACK		
M G		METALLIC GRAY		
		(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY		
STRUCTURE FINISH FINI STRUCTURE (B)	AVAILABLE WITH LED ONLY			
S C		SATIN CHROME		
BLK		BLACK		
CHR		CHROME		
WH		WHITE		
		(B) INCLUDE CANOPY FINISH IF A CANOPY IS SELECTED		
SHADE FINISH FINI ABAT-JOUR	AVAILABLE WITH LED ONLY			
WLT		WHITE - LINEN TRILAM		
GLT		GRAY - LINEN TRILAM		
ACRYLIC FINISH FINI ACRYLIQUE	AVAILABLE WITH LED ONLY			
WH		WHITE		WH

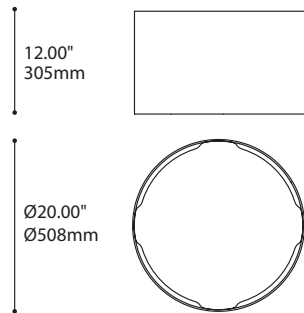


GGU

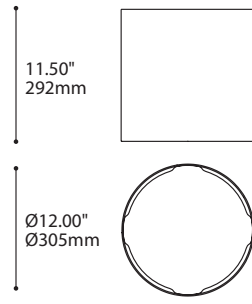


GGL



GIS




GIL

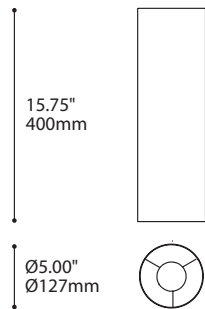

TF (LED NOT AVAILABLE)


TRILAM FABRIC SHADE
Wide variety of shade options available.
Washable & stain resistant options.
Ideal for commercial use.

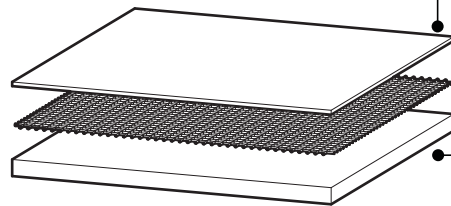

FIRST LAYER: PROTECTIVE SHIELD
Clear polymeric film for durability and washability

SECOND LAYER: FABRIC
High quality linen textile treated with resin

THIRD LAYER: DIFFUSER
Lighting grade translucent white polymer for diffusion

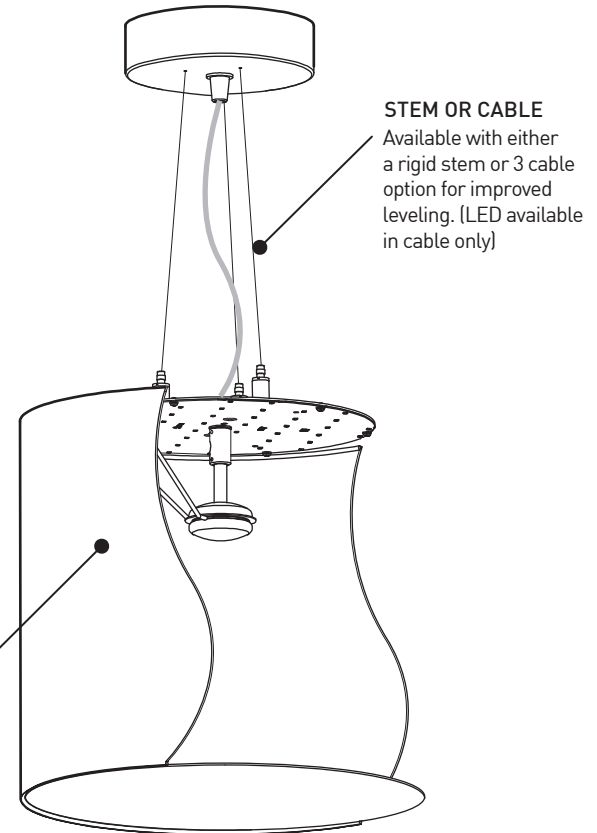

STEM OR CABLE
Available with either a rigid stem or 3 cable option for improved leveling. (LED available in cable only)

SPECIFICATIONS

LIGHT SOURCES

CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.40

GGL | GIL

LED.10.30
LED.10.40
CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.100

GGU | GIS

LED.24.30
LED.24.40
CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.100

DIMMING OPTIONS

DV 0-10V (120-277V), DP PHASE DIMMING (120V), DED, DE3

VOLTAGE

120V, 277V, 347V (277 not available with track adapter, 347 only with CF)

LIGHT DISTRIBUTION

Direct and indirect (LED only provides semi-direct)

STRUCTURE FINISH

Satin chrome, Chrome, Black, White

SHADE FINISH

White linen, White linen trilam, White fabric box, Gray linen trilam

DIFFUSER


Acrylic diffuser for LED version

CERTIFICATION


c-CSA-us , c-UL-us (F.T5.C Circline only)

WARRANTY


5 year warranty on LED fixture, 2 year warranty on FLOU fixtures




GGU

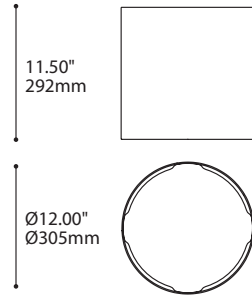


GGL

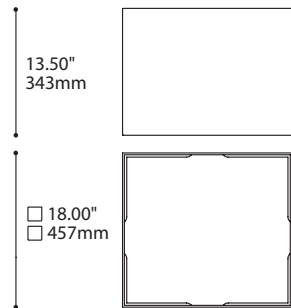

GIS


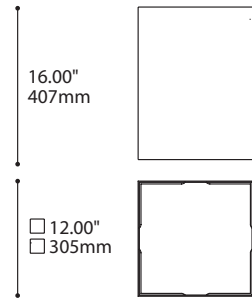


GIL



TF (NON DISPONIBLE EN DEL)

ABAT-JOUR EN TISSU TRILAM
Grande variété d'abat-jour disponible.
Option de tissus lavable & résistant aux taches.
Idéale pour utilisation commerciale.

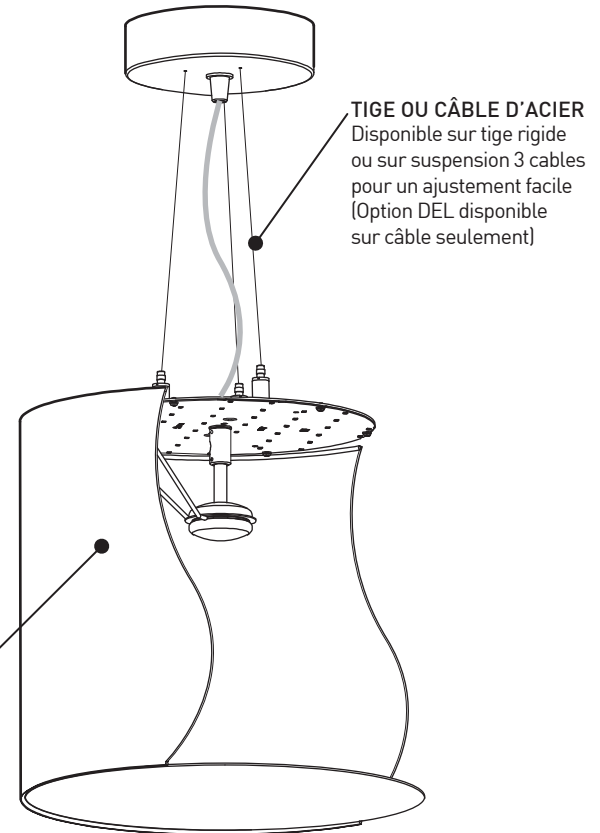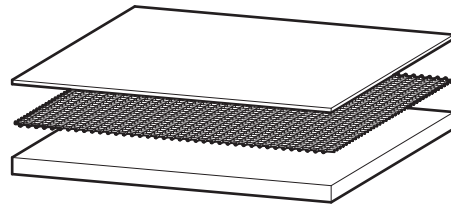

- COUCHE 1: BOUCLIER PROTECTEUR**
Film transparent polymérique pour une durabilité et netoyabilité accrues
- COUCHE 2: TISSU**
Lin tissé de haute qualité traité avec une résine plastique
- COUCHE 3: DIFFUSEUR**
Feuille de polymère grade éclairage à haute diffusion

SPECIFICATIONS

SOURCE LUMINEUSE

CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.40

GGL | GIL

LED.10.30
LED.10.40
CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.100

GGU | GIS

LED.24.30
LED.24.40
CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.100

OPTIONS DE GRADATION

DV 0-10V (120-277V), GRADATION DP PHASE (120V), DED, DE3

VOLTAGE

120V, 277V, 347V (277V non disponible sur système de rail, 347V seulement avec source CF)

DISTRIBUTION LUMINEUSE

Directe et indirecte (semi-directe seulement pour l'option DEL)

STRUCTURE

Satin chrome, Chrome, Noir, Blanc

ABAT-JOUR

Lin tissé blanc, Lin tissé blanc TRILAM, Tissu blanc, Lin gris TRILAM

DIFFUSEUR

Diffuseur en acrylique pour l'option DEL

CERTIFICATION

c-CSA-us, c-UL-us (F.T5.C Circulaire seulement)

GARANTIE

Garantie de 5 ans sur le luminaire en DEL, Garantie de 2 ans sur les luminaires en fluorescent