


BROADWAY 4211-GIL

PROJECT PROJÉT
SPEC TYPE
NOTES



OPTIONS

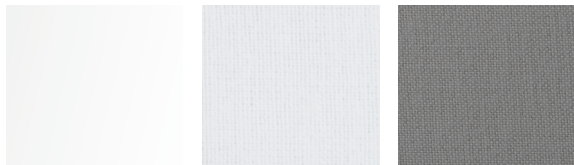

WH3 WLT (WASHABLE) GLT (WASHABLE)

OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	INC TRACK 1 CIRCUIT	INC	LED	CFL	CFL DIM
MOUNTING	2734B	2401E	2403G	2402G	2402J
CABLE	73.65"	73.30"	73.80"	74.05"	50.55"
STEM	49.05"	48.70"	-	49.45"	49.95"


MOUNTING OPTIONS OPTIONS DE MONTAGE

2734B	2401E	2403G	2402G	2402J
1.46" x 1.36" 37 x 35mm	Ø4.50" x 1.00" Ø114 x 25mm	Ø4.50" x 1.50" Ø114 x 38mm	Ø5.25" x 1.75" Ø133 x 44mm	Ø5.25" x 2.25" Ø133 x 57mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS


STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

STEM STD 36" 914mm	CABLE STD 60" 1523mm	3 x AC CABLE STD 60" 1523mm
--------------------------	----------------------------	-----------------------------------

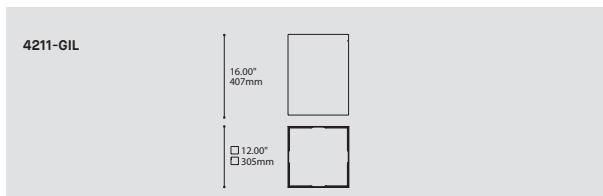


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE


MODEL MODÈLE	4211-GIL	BROADWAY	CODE	4411-GIL
LIGHT SOURCE SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)			
CF.D.13*		13W, CFL, DOUBLE TWIN TUBE, G24Q1 BASE		
CF.D.18*		18W, CFL, DOUBLE TWIN TUBE, G24Q2 BASE		
CF.T.26*		26W, CFL, TRIPLE TWIN TUBE, G24Q3 BASE		
INC.100		100W, INC, A19 / HAL T10, MEDIUM BASE (120V ONLY)		
LED.10.30*		10W, LED 3000K (WARM)		
LED.10.40*		10W, LED 4000K (NEUTRAL)		
		*NOT AVAILABLE WITH A TRACK ADAPTOR		
VOLTAGE VOLTAGE	120V	120 VOLT		
	277V*	277 VOLT		
	347V**	347 VOLT		
		*NOT AVAILABLE WITH A TRACK ADAPTOR		
		**ONLY AVAILABLE WITH CF.D.13, CF.D.18 AND CF.T.26 (NON-DIMMING BALLAST)		
DIMMING OPTION OPTION DE GRADATION	AVAILABLE WITH CF.D.18 AND CF.T.26 ONLY, MAXIMUM 36" STEM / CABLE LENGTH			
DED	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)			
DE3	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)			
	AVAILABLE WITH LED ONLY			
DV	0-10V DIMMING (120-277V)			
DP	PHASE DIMMING (120V ONLY)			
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.			
STEM OR CABLE TIGE OU CABLE	S6*	1/4" (6MM) STEM, FIELD ADJUSTABLE (NOT AVAILABLE WITH CFL LAMPS)		
	S10*	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE (FOR CFL LAMPS ONLY)		
	C*	CLEAR CABLE, FIELD ADJUSTABLE		
	AC**	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE (FOR LED LAMPS ONLY)		
		*NOT AVAILABLE WITH LED LIGHT SOURCE		
		**NOT AVAILABLE WITH A TRACK ADAPTOR		
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE	36	36" STEM (STD LENGTH)		
	60	60" CABLE (STD LENGTH)		
	**	CUSTOM STEM LENGTH (PLEASE SPECIFY)		
	**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)		
		FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING MONTAGE	RC	ROUND CANOPY / PAVILLON ROND FOR INC: 1" CANOPY (2401E) FOR CFL: 1.75" CANOPY (2402G) FOR DIMMING CFL: 2.25" CANOPY (2402J) FOR DIMMING LED: 1.50" CANOPY (2403G)		
	TA1	TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT INC 120V ADAPTOR (2734B)		
MOUNTING OPTION OPTION DE MONTAGE	SCA*	SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)		
		*ONLY AVAILABLE WITH A STEM		
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL^(A)	WH	WHITE		
	BLK	BLACK		
	M G	METALLIC GRAY		
		^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY		
STRUCTURE FINISH FINI STRUCTURE^(B)	S C	SATIN CHROME		
	BLK	BLACK		
	CHR	CHROME		
	WH	WHITE		
		^(B) INCLUDE CANOPY FINISH IF A CANOPY IS SELECTED		
SHADE FINISH FINI ABAT-JOUR	WH3	WHITE - LINEN		
	WLT	WHITE - LINEN - TRILAM		
	GLT	GRAY - LINEN - TRILAM		
ACRYLIC FINISH FINI ACRYLIQUE	WH	WHITE		

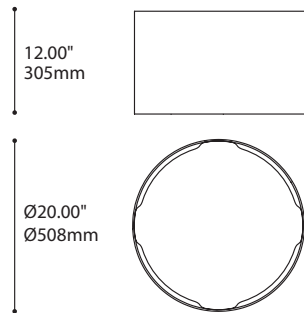


GGU

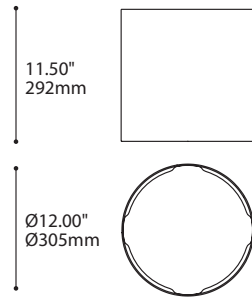


GGL

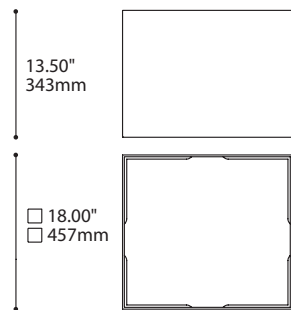


GIS

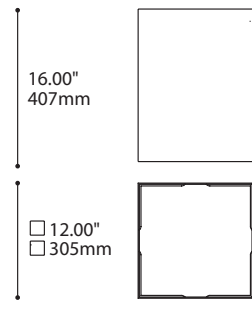

GIL

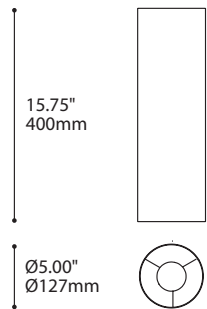


TF (LED NOT AVAILABLE)

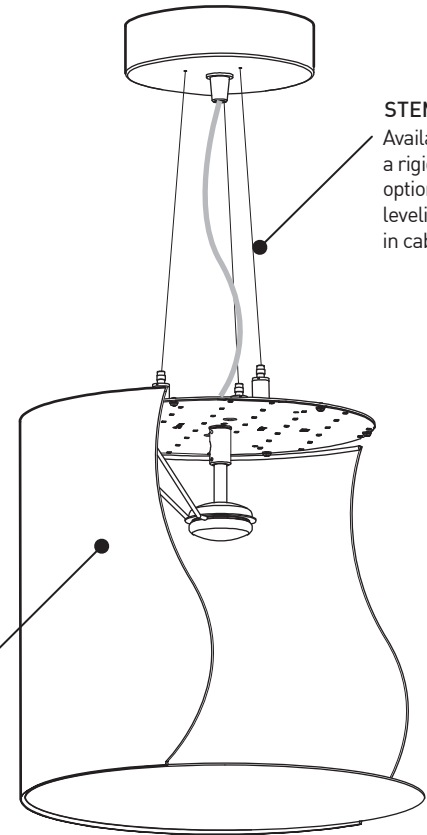

STEM OR CABLE
Available with either a rigid stem or 3 cable option for improved leveling. (LED available in cable only)

TRILAM FABRIC SHADE
Wide variety of shade options available. Washable & stain resistant options. Ideal for commercial use.

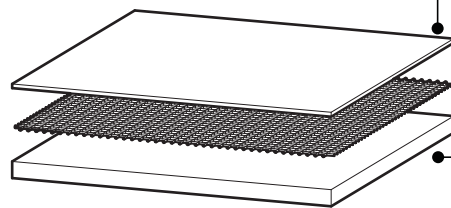

FIRST LAYER: PROTECTIVE SHIELD
Clear polymeric film for durability and washability

SECOND LAYER: FABRIC
High quality linen textile treated with resin

THIRD LAYER: DIFFUSER
Lighting grade translucent white polymer for diffusion

SPECIFICATIONS

LIGHT SOURCES

CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.40

GGL | GIL

LED.10.30
LED.10.40
CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.100

GGU | GIS

LED.24.30
LED.24.40
CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.100

DIMMING OPTIONS

DV 0-10V (120-277V), DP PHASE DIMMING (120V), DED, DE3

VOLTAGE

120V, 277V, 347V (277 not available with track adapter, 347 only with CF)

LIGHT DISTRIBUTION

Direct and indirect (LED only provides semi-direct)

STRUCTURE FINISH

Satin chrome, Chrome, Black, White

SHADE FINISH

White linen, White linen trilam, White fabric box, Gray linen trilam

DIFFUSER

Acrylic diffuser for LED version

CERTIFICATION

c-CSA-us, c-UL-us (F.T5.C Circline only)

WARRANTY


5 year warranty on LED fixture, 2 year warranty on FLOU fixtures




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com




4211
TF | GIS | GIL | GGU | GGL

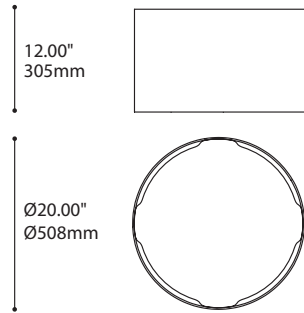


GGU

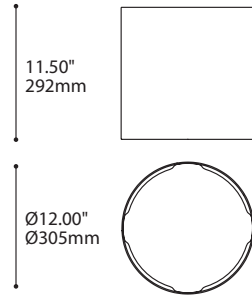


GGL

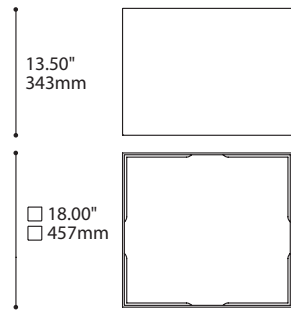

GIS


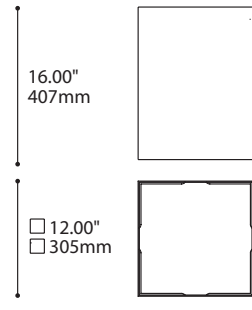


GIL

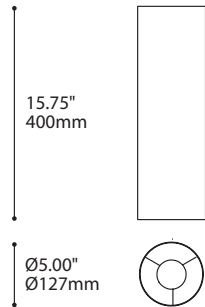

TF (NON DISPONIBLE EN DEL)

ABAT-JOUR EN TISSU TRILAM
Grande variété d'abat-jour disponible.
Option de tissus lavable & résistant aux taches.
Idéale pour utilisation commerciale.

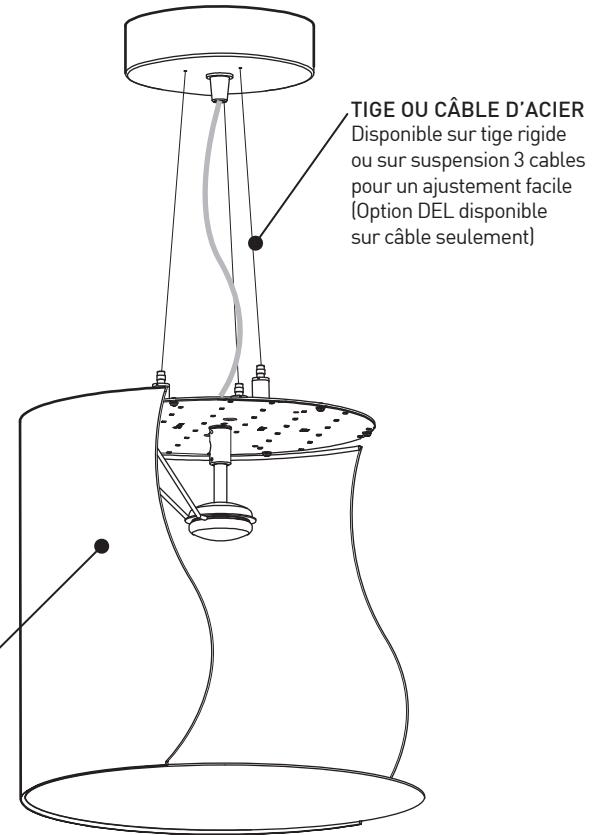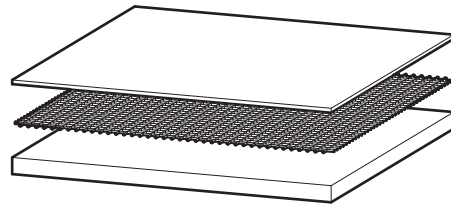

- COUCHE 1: BOUCLIER PROTECTEUR**
Film transparent polymérique pour une durabilité et netoyabilité accrues
- COUCHE 2: TISSUS**
Lin tissé de haute qualité traité avec une résine plastique
- COUCHE 3: DIFFUSEUR**
Feuille de polymère grade éclairage à haute diffusion

SPECIFICATIONS

SOURCE LUMINEUSE

CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.40

GGL | GIL

LED.10.30
LED.10.40
CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.100

GGU | GIS

LED.24.30
LED.24.40
CF.D.13
CF.D.18
CF.T.26
CF.SP.26
INC.100

OPTIONS DE GRADATION

DV 0-10V (120-277V), GRADATION DP PHASE (120V), DED, DE3

VOLTAGE

120V, 277V, 347V (277V non disponible sur système de rail, 347V seulement avec source CF)

DISTRIBUTION LUMINEUSE

Directe et indirecte (semi-directe seulement pour l'option DEL)

STRUCTURE

Satin chrome, Chrome, Noir, Blanc

ABAT-JOUR

Lin tissé blanc, Lin tissé blanc TRILAM, Tissu blanc, Lin gris TRILAM

DIFFUSEUR

Diffuseur en acrylique pour l'option DEL

CERTIFICATION

c-CSA-us, c-UL-us (F.T5.C Circulaire seulement)

GARANTIE

Garantie de 5 ans sur le luminaire en DEL, Garantie de 2 ans sur les luminaires en fluorescent