

MIKA 4230-RAP

PROJECT PROJÉT
SPEC TYPE
NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	LED TRACK 1 CIRCUIT	LED DIM
MOUNTING	2734E	2403G
CABLE	77.87"	76.87"

MOUNTING OPTIONS OPTIONS DE MONTAGE

2734E	2403G
6.15" x 2.00" 156 x 51mm	Ø4.50" x 1.75" Ø114 x 44mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

CABLE STD 60" 1523mm	
----------------------------	--

4230-RAP	
----------	--

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	4230-RAP	CODE
4230-RAP	MIKA RAP (Ø12")	
LIGHT SOURCE SOURCE LUMINEUSE	LED.9	
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.9	9W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V*	277 VOLT	
*NOT AVAILABLE WITH A TRACK ADAPTOR		
DIMMING OPTION OPTION DE GRADATION		
DV*	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE. *NOT AVAILABLE WITH A TRACK ADAPTOR		
CABLE CABLE		C
C	CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING MONTAGE		
RC	ROUND CANOPY / PAVILLON ROND FOR DIMMING LED: 1.75" CANOPY (2403G)	
TA1	TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT LED DIMMING 120V ADAPTOR (2734E)	
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL (A)		
BLK	BLACK	
WH	WHITE	
(A) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
STRUCTURE FINISH FINI STRUCTURE		WHE
WHE	WHITE FINE TEXTURE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES** **LED**

DESIGN: Classic round globe with a high-tech frosted shade and LED light engine, Mika can be specified as a single pendant or create a bouquet to fill large spaces with a soft and diffused light.


LIGHT SOURCE: High performance LED module with dimming options available.

STRUCTURE: Die-cast aluminum with black satin anodized finish with a textured white finish top canopy.

DIFFUSER: Impact and graffiti resistant, translucent white rotomolded MDPE is the perfect material for this spherical design.


CERTIFIED: c-CSA-us

FAMILY FAMILLE

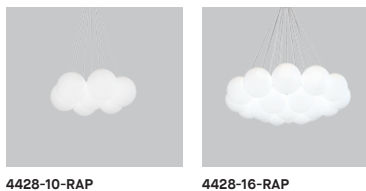

4428-10-RAP

4428-16-RAP

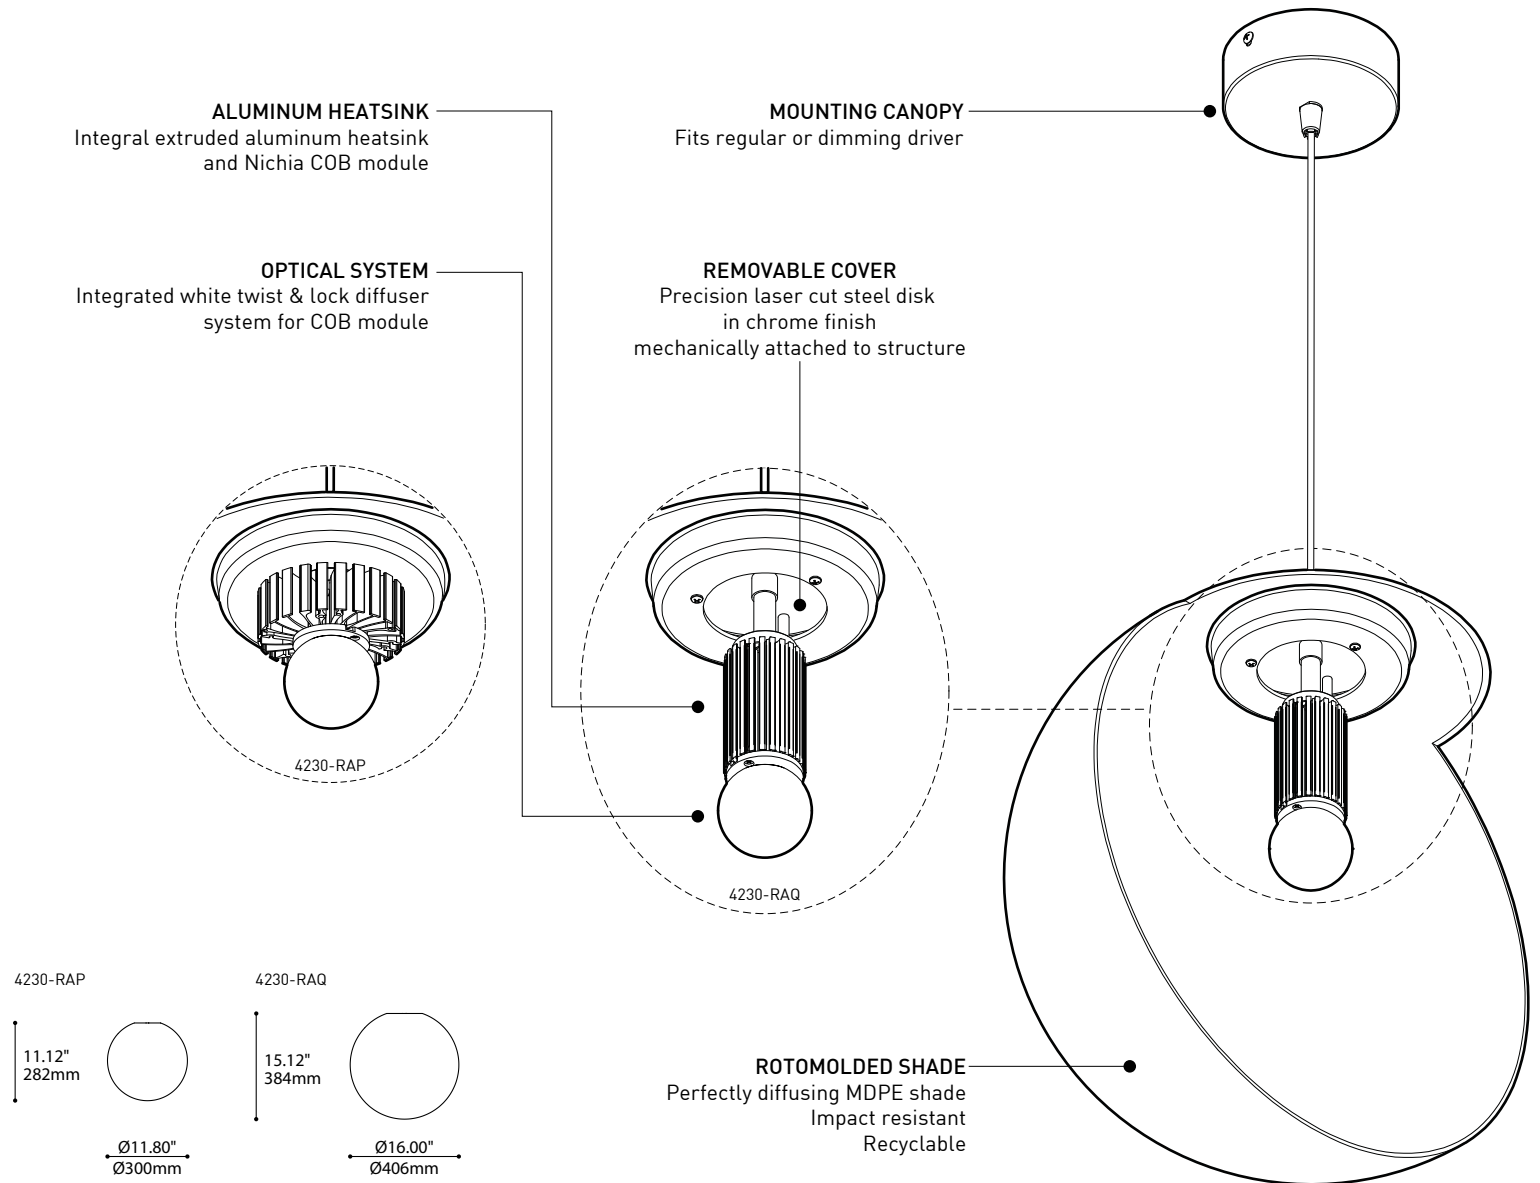


SPECIFICATIONS

4230-RAP

4230-RAQ

LIGHT SOURCE	1 x Nichia COB - total ± 9w	1 x Nichia COB - total ± 13w
DELIVERED LUMENS	836 lm (4000K)	1115 lm (4000K)
MODULE	UL Recognized - custom design	
CRI	80 CRI (typical)	
HEAT SINK	Anodized extruded aluminum	
LIGHT DISTRIBUTION	Twist & lock Ultra Wide Beam optical system white finish	
DIFFUSER	Translucent white rotomolded MDPE shade	
STRUCTURE	Laser cut steel disk in chrome finish with chrome or white canopy	
VOLTAGE	120V or 277V	
DIMMING (DP)	Phase dimming (120V only)	
DIMMING (DV)	0-10V dimming (120V or 277V)	
TRACK ADAPTOR	Available in DP Dimming only	
WARRANTY	5 years	

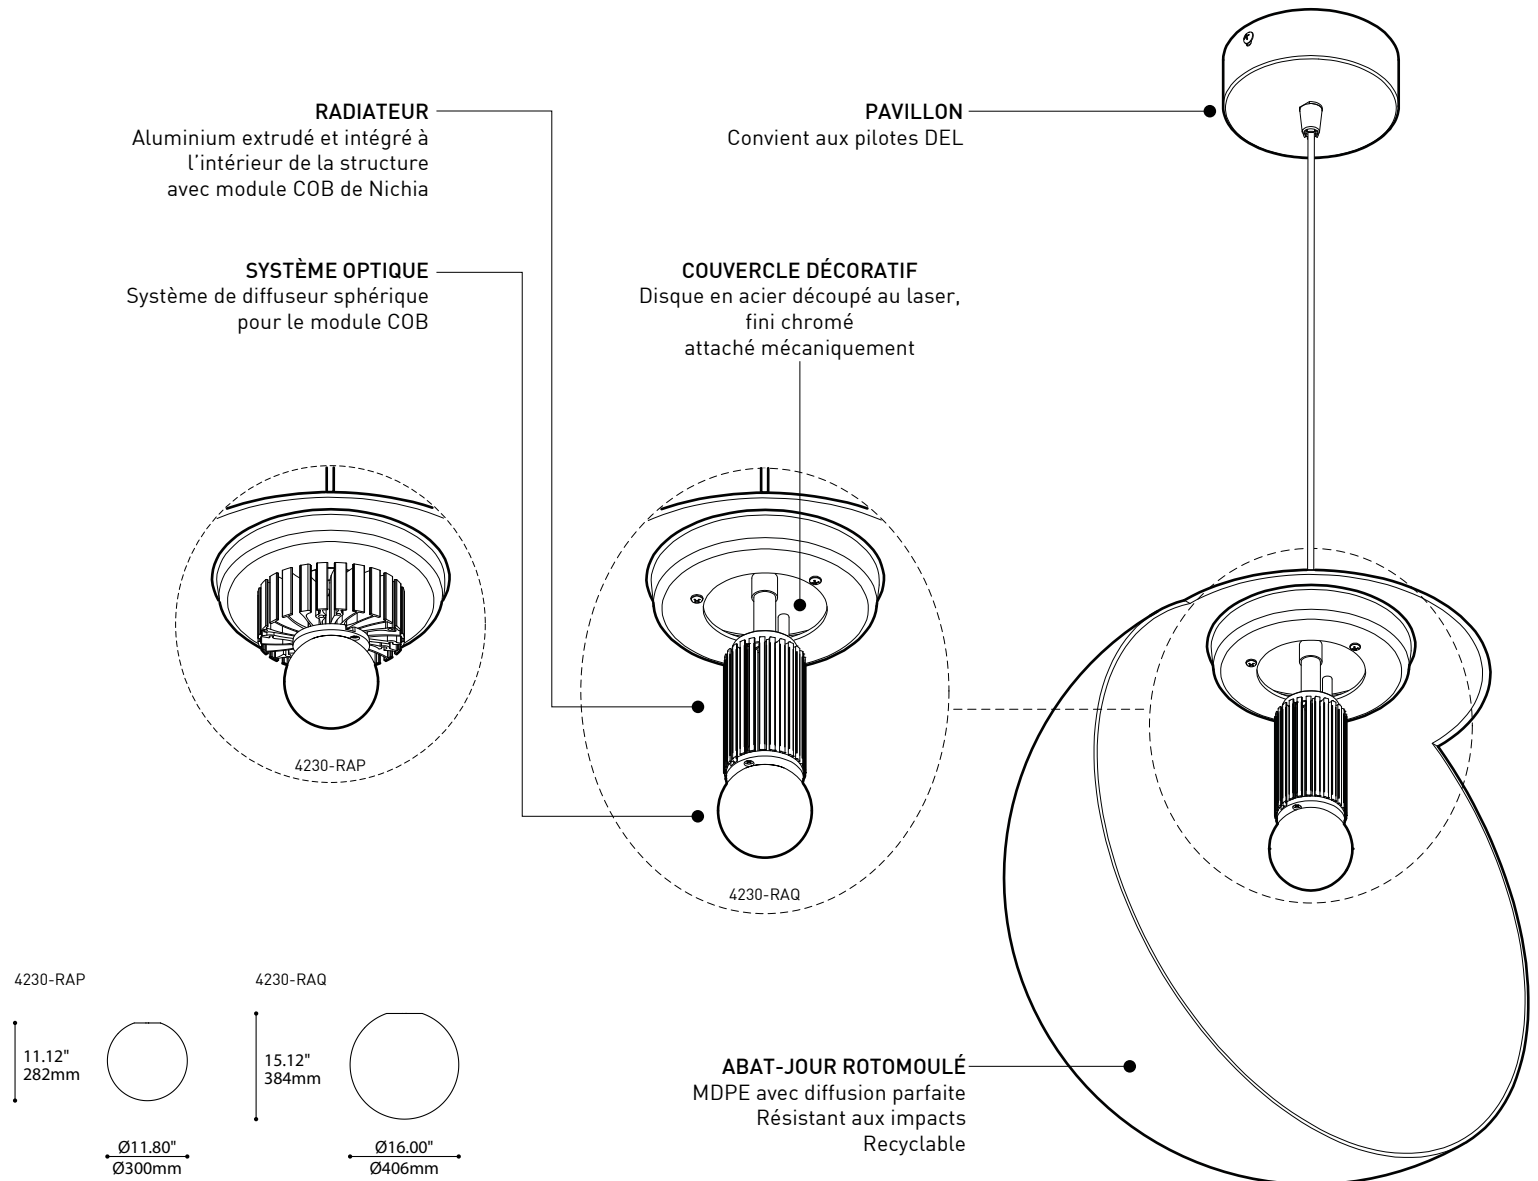

SPÉCIFICATIONS

4230-RAP

4230-RAQ

SOURCE LUMINEUSE	1 x Nichia COB - au total ± 9w	1 x Nichia COB - au total ± 13w
LUMENS RÉELS	836 lm (4000K)	1115 lm (4000K)
MODULE	Reconnu par UL - design sur mesure	
IRC	80 IRC (typique)	
RADIATEUR	Aluminium extrudé & anodisé	
DISTRIBUTION LUMINEUSE	Système optique en blanc à faisceau large	
DIFFUSEUR	Diffuseur de MDPE rotomoulé	
STRUCTURE	Disque en acier découpé au laser, fini chromé et pavillon chromé ou blanc	
VOLTAGE	120V ou 277V	
GRADATION (DP)	Phase gradation (120V seulement)	
GRADATION (DV)	0-10V gradation (120V ou 277V)	
ADAPTEUR DE RAIL	Disponible pour DP gradation seulement	
GARANTIE	5 ans	