

# VEGA 4233-XBL

PROJECT PROJÉT
SPEC TYPE
NOTES



## FAMILY FAMILLE



3738-XBL                      4427-XBL                      4425-XBL

## OVERALL HEIGHT HAUTEUR HORS TOUT

MOUNTING	2734F	2401C
CABLE	78.50"	77.30"
STEM	54.50"	53.30"

## MOUNTING OPTIONS OPTIONS DE MONTAGE

2734F	2401C
6.60" x 1.77"	Ø4.50" x 0.50"
168 x 45mm	Ø114 x 12.7mm

\* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

## STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

STEM	CABLE
STD 36"	STD 60"
914mm	1523mm

4233-XBL

18.50"  
470mm

Ø4.00"  
Ø102mm

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE **4233-XBL**

4233-XBL VEGA XBL (ACRYLIC DIFFUSER)

LIGHT SOURCE SOURCE LUMINEUSE **LED.11**

(WATTAGE, LAMP TYPE, OTHER INFO)  
LED.11 11W, LED

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K  
35 3500K  
40 4000K

VOLTAGE VOLTAGE

120V 120 VOLT  
277V\* 277 VOLT  
\*NOT AVAILABLE WITH A TRACK ADAPTOR

DIMMING OPTION OPTION DE GRADATION

DV\* 0-10V DIMMING (120V-277V)  
DP PHASE DIMMING (120V ONLY)  
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.  
\*NOT AVAILABLE WITH A TRACK ADAPTOR

STEM OR CABLE TIGE OU CABLE

S10 3/8" (10MM) STEM, NOT FIELD ADJUSTABLE  
C CLEAR CABLE, FIELD ADJUSTABLE

STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE

36 36" STEM (STD LENGTH)  
60 60" CABLE (STD LENGTH)  
\*\* CUSTOM STEM LENGTH (PLEASE SPECIFY)  
\*\* CUSTOM CABLE LENGTH (PLEASE SPECIFY)  
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING MONTAGE

RC ROUND CANOPY / PAVILLON ROND  
FOR LED: 0.50" CANOPY (2401C)\*

TA1 TRACK ADAPTOR / ADAPTATEUR DE RAIL  
1 CIRCUIT  
LED 120V ADAPTOR (2734F)  
\*3983 ACCESSORY IS PROVIDED

MOUNTING OPTION OPTION DE MONTAGE

SCA\* SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)  
\*ONLY AVAILABLE WITH A STEM

TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL (A)

WH WHITE  
BLK BLACK  
M G METALLIC GRAY  
(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY

STRUCTURE FINISH FINI STRUCTURE

CHR CHROME  
S C SATIN CHROME

CANOPY FINISH FINI PAVILLON

WHE WHITE FINE TEXTURE  
\*IF NO FINISH IS SELECTED, CANOPY FINISH WILL BE THE SAME AS STRUCTURE FINISH

DIFFUSER FINISH FINI DIFFUSEUR **WH**

WH WHITE


ACCESSORY ACCESSOIRE

3983 DEEP JUNCTION BOX (PROVIDED WITH 2401C AS PER ABOVE)

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

**BIM** **DIM** **IES** **LED**

DESIGN: Slim and elegant design pendant may be mounted on track or canopy.  
LIGHT SOURCE: High performance LED Chip-on-board (COB) module with standard 0-10V or phase dimming driver integrated within the fixture.  
DIFFUSER: Finely sandblasted acrylic with closed bottom.  
CERTIFIED: c-CSA-us

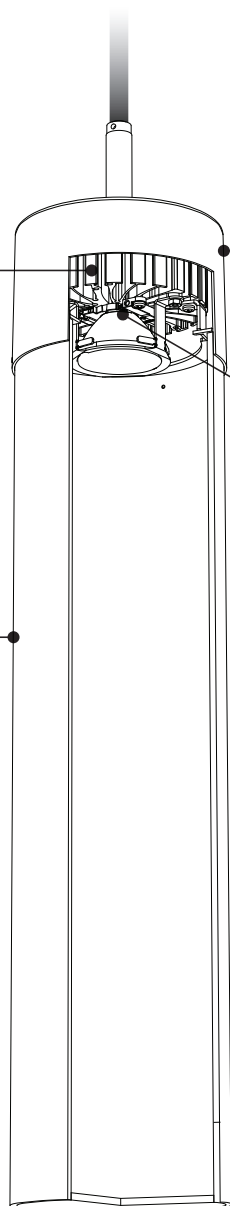

**TOUGH**

A large aluminium heatsink integrated inside the frame provides cooling to the LEDs.

**CLASS ACT**

The chrome frame add a touch of prestige to the fixture and helps it to blend in its surroundings, picking up the colors of the environment.

**RAW POWER**

A highly efficient 11.7W NICHIA COB at the center of every Vega-XBL ensure a strong lumen output.

**SIMPLE**

The driver is located inside the canopy; for easy maintenance.

**PURE BEAUTY**

The finely sandblasted acrylic diffuser produces a fabulously charming glow.

**ELEGANT**

Vega is a fixture made to illuminate spaces with a strong glow thanks to its diffusing tube.



4"




20.8"

**SPECIFICATIONS**

**4233-XBL**

LIGHT SOURCE	11W LED COB - System wattage : 13.9W
DELIVERED LUMENS	1260lm
CRI	83 CRI (Typical)
LIGHT DISTRIBUTION	Diffused direct
DIFFUSER	Closed top finely sandblasted acrylic (XBL)
STRUCTURE	Machined & spin formed chromed steel
MODULE	UL Recognized
VOLTAGE	120V (DP) or 120-277V (DV)
DRIVER	CC 350mA, UL Recognized
DIMMING	Phase dimming (DP) or 0-10V dimming (DV)
LM-79	By request
WARRANTY	5 years

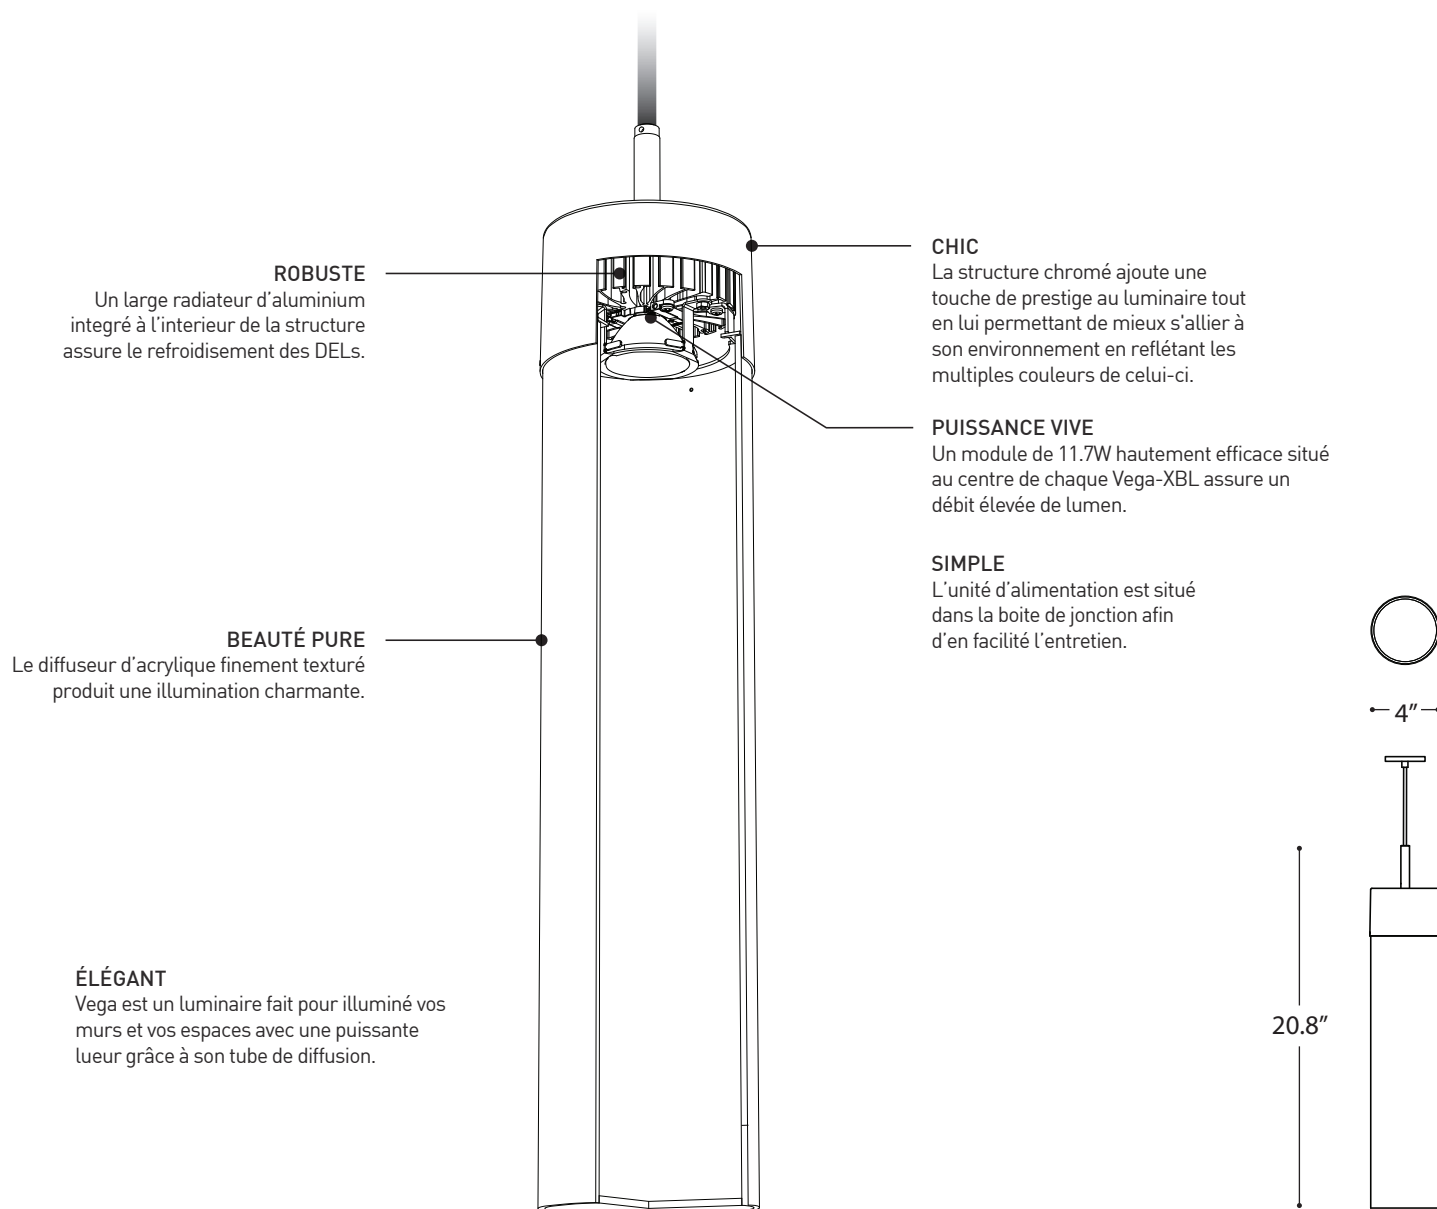

## SPÉCIFICATIONS

## 4233-XBL

SOURCE LUMINEUSE	11W DEL COB - Consommation totale : 13.9W
LUMENS RÉELS	1260lm
IRC	83 IRC (Typique)
DISTRIBUTION LUMINEUSE	Direct diffus
DIFFUSEUR	Acrylique finement texturé avec dessus fermé (XBL)
STRUCTURE	Acier chromé machiné, repoussé et plié
MODULE	Reconnu par UL
VOLTAGE	120V (DP) ou 120-277V (DV)
UNITÉ D'ALIMENTATION	CC 350mA, Reconnu UL
GRADATION	Gradation phase (DP) ou gradation 0-10V (DV)
LM-79	Sur demande
GARANTIE	5 ans