

# BEATBOX 4237-XLQ

PROJECT PROJÉT
SPEC TYPE
NOTES



## OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	HAL TRACK 1 CIRCUIT	LED TRACK 1 CIRCUIT	HAL	CFL-LED-LED DIM	CFL DIM
MOUNTING	2734	2734F	2431E	2431G	2431J
CABLE	76.30"	77.05"	75.30"	75.05"	52.55"
STEM	51.75"	52.50"	50.75"	51.50"	52.00"


## MOUNTING OPTIONS OPTIONS DE MONTAGE

2734	2734F	2431E	2431G	2431J
3.85" x 2.03" 98 x 52mm	6.60" x 1.77" 168 x 45mm	5.00" x 5.00" x 1.00" 127x127x25mm	5.25" x 5.25" x 1.75" 133x133x44mm	5.75" x 5.75" x 2.25" 146x146x57mm

\* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS


## STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

STEM STD 36"	CABLE STD 60"
914mm	1523mm

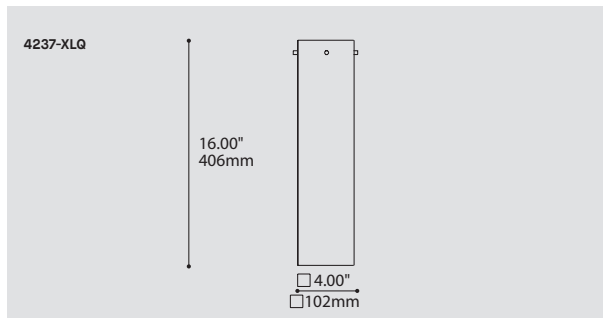

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>	4237-XLQ
4237-XLQ BEATBOX	
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	
CF.D.13*	13W, CFL, DOUBLE TWIN TUBE, G24Q1 BASE
CF.D.18*	18W, CFL, DOUBLE TWIN TUBE, G24Q2 BASE
CF.T.32*	26/32W, CFL, DOUBLE / TRIPLE TWIN TUBE, G24Q3 BASE
BIPIN.50	50W, HAL, BIPIN, GY6.35 BASE
LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT
	*NOT AVAILABLE WITH A TRACK ADAPTOR
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>	
FOR LED ONLY	
30	3000K
35	3500K
40	4000K
<b>VOLTAGE VOLTAGE</b>	
120V	120 VOLT
277V*	277 VOLT
347V**	347 VOLT
	*NOT AVAILABLE WITH A TRACK ADAPTOR
	**ONLY AVAILABLE WITH CF.D.13, CF.D.18 AND CF.T.32 (NON-DIMMING BALLAST)
<b>DIMMING OPTION OPTION DE GRADATION</b>	
AVAILABLE WITH CF.D.18 AND CF.T.32 ONLY, MAXIMUM 36" STEM / CABLE LENGTH	
DED	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)
DE3	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)
FOR LED ONLY	
DV*	0-10V DIMMING (120-277V)
	*NOT AVAILABLE WITH A TRACK ADAPTOR
<b>EMERGENCY BATTERY BATTERIE D'URGENCE</b>	
AVAILABLE WITH CF.D.13, CF.D.18 AND CF.T.32. 120V OR 277V ONLY.	
NOT AVAILABLE WITH A DIMMING BALLAST, MAXIMUM 60" STEM / CABLE LENGTH	
REM <sup>(1)</sup>	REMOTE EMERGENCY BATTERY
	<sup>(1)</sup> 3981 ACCESSORY IS REQUIRED FOR THIS OPTION
<b>STEM OR CABLE TIGE OU CABLE</b>	
S10	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE
C	CLEAR CABLE, FIELD ADJUSTABLE
<b>STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE</b>	
36	36" STEM (STD LENGTH)
60	60" CABLE (STD LENGTH)
**	CUSTOM STEM LENGTH (PLEASE SPECIFY)
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.
<b>MOUNTING MONTAGE</b>	
SQC	SQUARE CANOPY / PAVILLON CARRÉ
	FOR HAL: 1.00" CANOPY (2431E)
	FOR CFL & LED: 1.75" CANOPY (2431G)
	FOR DIMMING CFL: 2.25" CANOPY (2431J)
TA1	TRACK ADAPTOR / ADAPTEUR DE RAIL
	1 CIRCUIT
	HAL 120/12V ADAPTOR (2734)
	LED NON-DIMMING 120V ADAPTOR (2734F)
<b>MOUNTING OPTION OPTION DE MONTAGE</b>	
SCA*	SLOPE CEILING ADAPTOR / ADAPTEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)
	*ONLY AVAILABLE WITH A STEM
<b>TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL<sup>(A)</sup></b>	
WH	WHITE
BLK	BLACK
M G	METALLIC GRAY
	<sup>(A)</sup> FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY
<b>STRUCTURE FINISH FINI STRUCTURE<sup>(B)</sup></b>	
CHR	CHROME
SC	SATIN CHROME
	<sup>(B)</sup> INCLUDE CANOPY FINISH IF A CANOPY IS SELECTED
<b>DIFFUSER FINISH FINI DIFFUSEUR</b>	WH
WH	WHITE
<b>ACCESSORY ACCESSOIRE</b>	
3981	JUNCTION BOX FOR CFL REMOTE EMERGENCY BATTERY


4237-XLQ  
BEATBOX

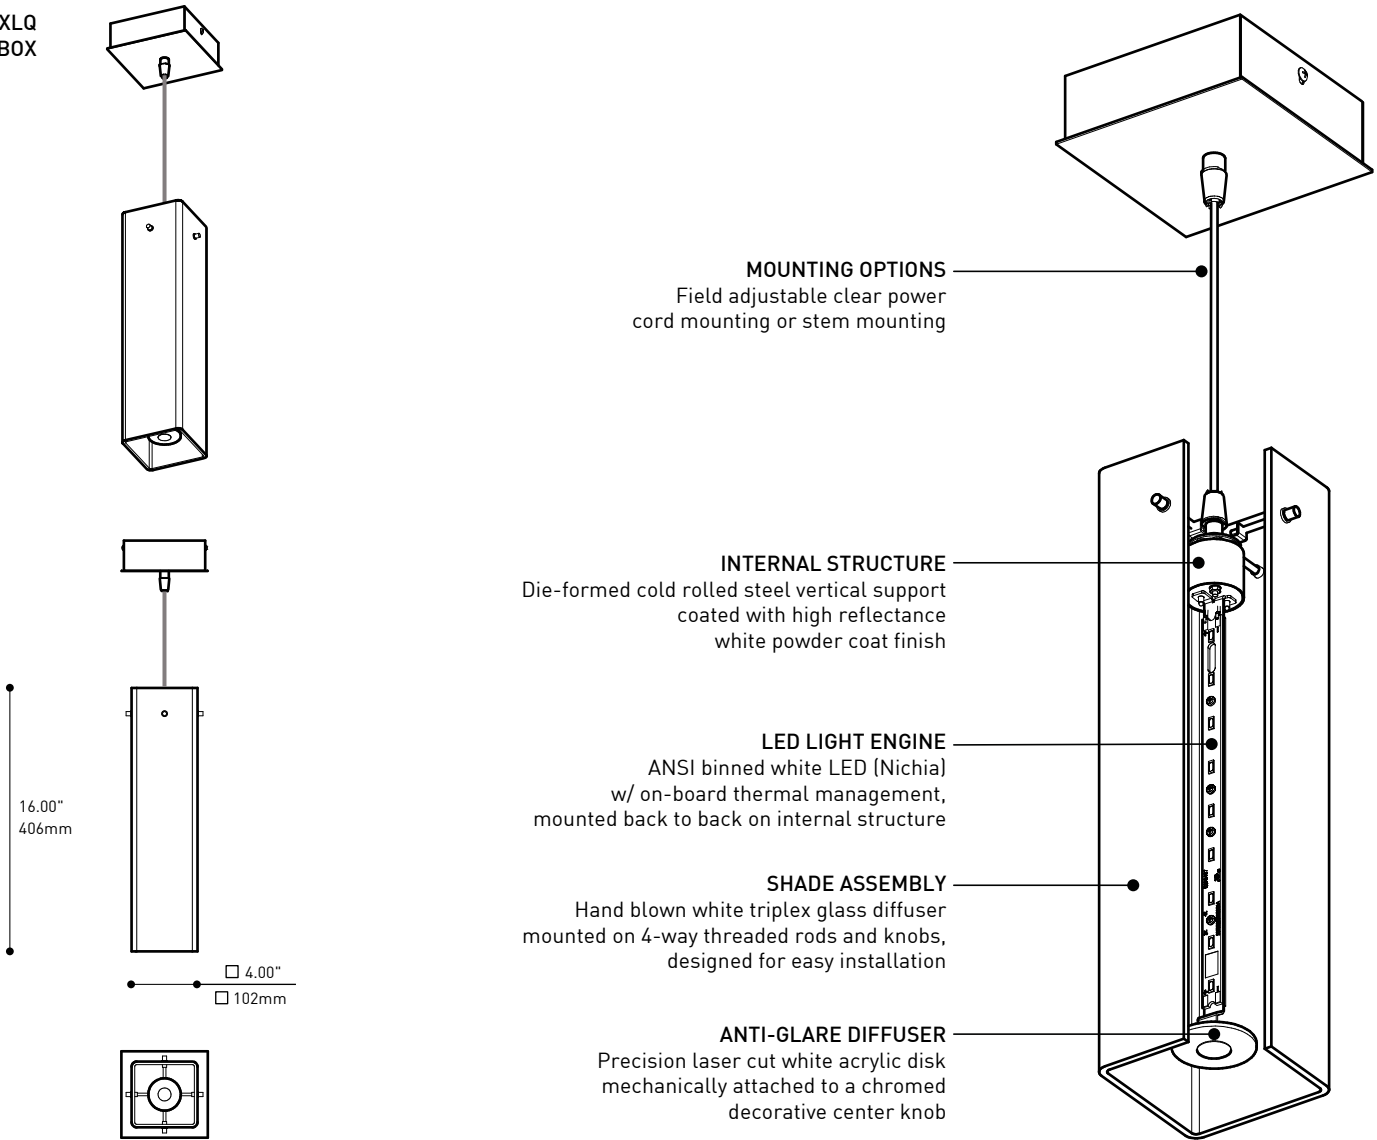

## SPECIFICATIONS

	LED	FLUORESCENT	INCANDESCENT
LIGHT SOURCE	18 x NICHIA LEDS - total $\pm 7.2W$ or $\pm 10.8W$ (HO)	1 x 13w or 18w or 26/32w CFL	1 x 50w BIPIN / 1 x 60w G9 / 1 x 100w B10
MODULE	UL recognized - made in USA		
LUMENS (DELIVERED)	990 lm (HO) - for 4000K		
CCT / CRI	ANSI binned 4000K (80 CRI)		
ROHS	Compliant		
THERMAL MANAGEMENT	Light Engine w/ on-board Thermal Management		
LIGHT DISTRIBUTION	General diffused - 120° Beam Angle	General diffused	General diffused
VOLTAGE	120 or 277V	120/277/347V	120V only
DRIVER / BALLAST	12V (120V), 12V (277V)	Advance Smartmate	N/A
DIMMING	0-10V Dimming	Lutron Ecosystem	N/A
LM-79 / L70	On request / Estimated 50 000 hrs		
STRUCTURE	Formed Cold Rolled steel finished in white polyester powder coat (0.060" nominal thickness)		
SHADE	Hand blown white triplex glass w/ 4-way side mounting points		
MOUNTING	Suspension square canopy available in various finishes		
DIFFUSER	Precision laser cutting white acrylic disk (3mm nominal thickness) combined w/ chromed decorative knob		
WARRANTY	5 years	1 year	1 year

4237-XLQ  
BEATBOX

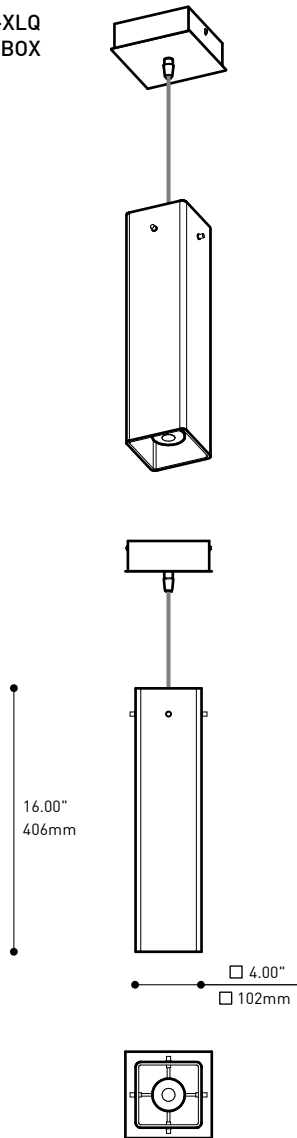


**OPTIONS DE MONTAGE**  
Système de suspension par câble électrique  
ou sur tige, ajustable sur le site et  
facile pour la mise à niveau

**STRUCTURE INTERNE**  
Support vertical découpé, plié en acier,  
couvert par une peinture blanche réfléchissante

**SOURCE LUMINEUSE À LED**  
Bandes de LED (Nichia) blanches à alimentation 12V,  
offertes avec un dissipateur thermique intégré,  
et montées verticalement sur la structure interne

**ASSEMBLAGE DU DIFFUSEUR**  
Verre Triplex blanc soufflé à la main  
monté sur un support composé de quatre tiges,  
conçu pour une installation facile

**ÉCRAN ANTI-ÉBLOUISSEMENT**  
Disque acrylique blanc découpé au laser,  
attaché mécaniquement à l'aide  
d'une pièce décorative chromée

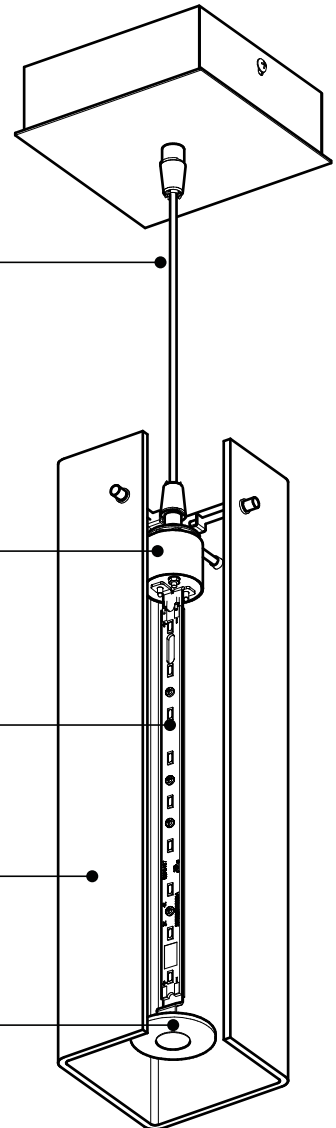

## SPÉCIFICATIONS

	LED	FLUORESCENTE	INCANDESCENTE
SOURCE LUMINEUSE	18 x NICHIA LEDS - au total ±7.2W ou ±10.8W (HO)	1 x 13w ou 18w ou 26/32w CFL	1 x 50w BIPIN / 1 x 60w G9 / 1 x 100w B10
MODULE	Reconnu UL - Fabriqué aux États-Unis		
LUMENS (LIVRÉS)	990 lm (HO) - pour 4000K		
CCT / CRI	ANSI trié à 4000K (80 CRI)		
ROHS	Conforme		
GESTION THERMIQUE	Sources lumineuses avec autocontrôle de température		
DISTRIBUTION LUMINEUSE	Mixte - Diffusée à 120°	Mixte	Mixte
VOLTAGE	120 ou 277V	120/277/347V	120V seulement
PILOTE / BALLAST	12V (120V), 12V (277V)	Advance Smartmate	Non disponible
GRADATION	0-10V Gradation	Lutron Ecosystem	Non disponible
LM-79 / L70	Sur demande / 50 000 hrs estimées		
STRUCTURE	Acier découpé, plié (0.060" épaisseur nominale) / finie de peinture électrostatique à base de Polyester blanche		
DIFFUSEUR	Verre Triplex blanc soufflé à la main, monté sur un support par quatre tiges		
MONTAGE	Pavillon carré disponible en plusieurs finis		
LENTILLE DU BAS	Disque acrylique blanc en découpe rond (3mm épaisseur nominale) attaché à l'aide d'une pièce décorative chromée		
GARANTIE	5 ans	1 an	1 an