

SKIRT 4255-UCR

PROJECT PROJET

SPEC TYPE

NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	INC-LED TRACK 1 CIRCUIT	LED DIM TRACK 1 CIRCUIT	INC	LED DIM -8W 277V	CFL	CFL DIM
MOUNTING	2734B	2734F	2401E	2403G	2402G	2402J
CABLE	70.35"	71.75"	71.00"	71.50"	71.75"	48.25"


MOUNTING OPTIONS OPTIONS DE MONTAGE

2734B	2734F	2401E	2403G	2402G	2402J
1.46" x 1.36" 37 x 35mm	7.25" x 1.70" 37 x 35mm	Ø4.50" x 1.00" Ø114 x 25mm	Ø4.50" x 1.50" Ø114 x 38mm	Ø5.25" x 1.75" Ø133 x 44mm	Ø5.25" x 2.25" Ø133 x 57mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

AC CABLE STD 60" 1523mm	
-------------------------------	--

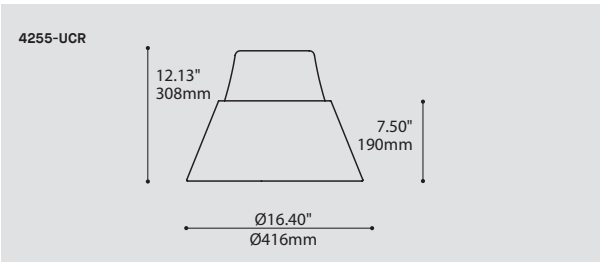

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE 4255-UCR

4255-UCR SKIRT

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

CF.D.13*		13W, CFL, DOUBLE TWIN TUBE, G24Q1 BASE
CF.D.18*		18W, CFL, DOUBLE TWIN TUBE, G24Q2 BASE
CF.T.32*		26/32W, CFL, TRIPLE TWIN TUBE, G24Q3 BASE
INC.100		100W, INC, A19 / HAL T10, MEDIUM BASE (120V ONLY)
LED.4		4W, LED
LED.8		8W, LED
LED.18		18W, LED

*NOT AVAILABLE WITH A TRACK ADAPTOR

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY

30	3000K
35	3500K
40	4000K

VOLTAGE VOLTAGE

120V	120 VOLT
277V*	277 VOLT
347V*	347 VOLT**

*NOT AVAILABLE WITH A TRACK ADAPTOR

**ONLY AVAILABLE WITH CF.D.13, CF.D.18 & CF.T.32 (NON-DIMMING BALLAST)

DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH CF.D.18 & CF.T.32

MAXIMUM 36" AIRCRAFT CABLE LENGTH

DED	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)
DE3	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)

FOR LED ONLY

DV*	0-10V DIMMING (120-277V)
DP	PHASE DIMMING (120V ONLY)

LED DIMMING DRIVER IS STANDARD FOR LED.18, PLEASE SPECIFY YOUR DIMMING TYPE.

*NOT AVAILABLE WITH A TRACK ADAPTOR

CABLE CABLE

AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE
----	---

CABLE LENGTH LONGUEUR DE CABLE

60	60" AIRCRAFT CABLE (STD LENGTH)
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING MONTAGE

RC	ROUND CANOPY / PAVILLON ROND FOR LED 18W: 0.50" CANOPY (2401C) FOR INC & LED: 1.00" CANOPY (2401E) FOR DIMMING LED 4W AND 8W & LED 8W 277V: 1.75" CANOPY (2403G) FOR CFL: 1.75" CANOPY (2402G) FOR DIMMING CFL: 2.25" CANOPY (2402J)
----	---

TRACK ADAPTOR / ADAPTEUR DE RAIL*

TA1	1 CIRCUIT INC, LED NON-DIMMING (4W & 8W) & LED (18W) 120V ADAPTOR (2734B) LED DIMMING (4W & 8W) 120V ADAPTOR (2734F)
-----	--

TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL^(A)

WH	WHITE
BLK	BLACK
M G	METALLIC GRAY

^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY

STRUCTURE FINISH FINI STRUCTURE^(B)

BLK	BLACK
WH	WHITE

INTERNAL PARABOLIC REFLECTOR SUPPLIED AS WHITE ONLY.

^(B) INCLUDE CANOPY FINISH IF A CANOPY IS SELECTED





DIFFUSER FINISH FINI DIFFUSEUR

CFR	CLEAR / FROSTED
-----	-----------------

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT


BIM **DIM** **IES** **LED**

DESIGN:	Beautiful organic glass direct/indirect pendant with a floating conic skirt shape.
STRUCTURE:	Die-formed steel canopy and fittings with white parabolic interior reflector.
DIFFUSER:	Hand blown clear glass with a precisely aligned frosted section and black or white die-spun aluminum shade.
CERTIFIED:	c-CSA-us

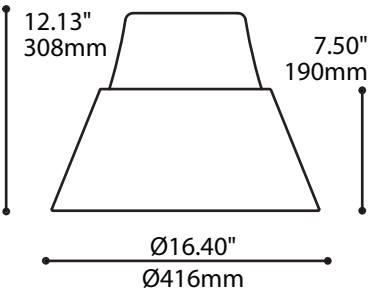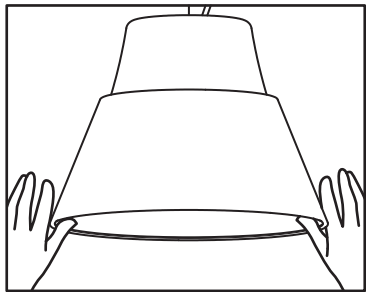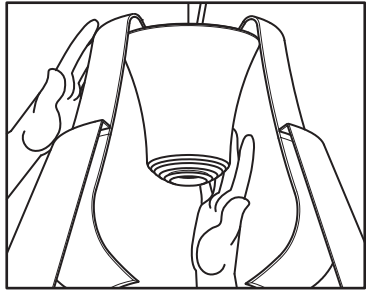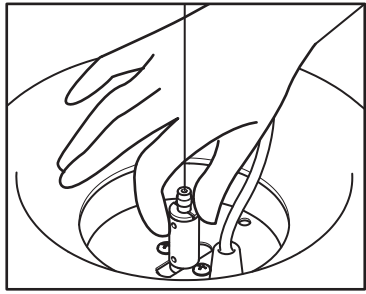

PARABOLIC REFLECTOR
White powder coated spun
16Ga aluminium sheet

SINGLE AIRCRAFT CABLE
Adjustable on site

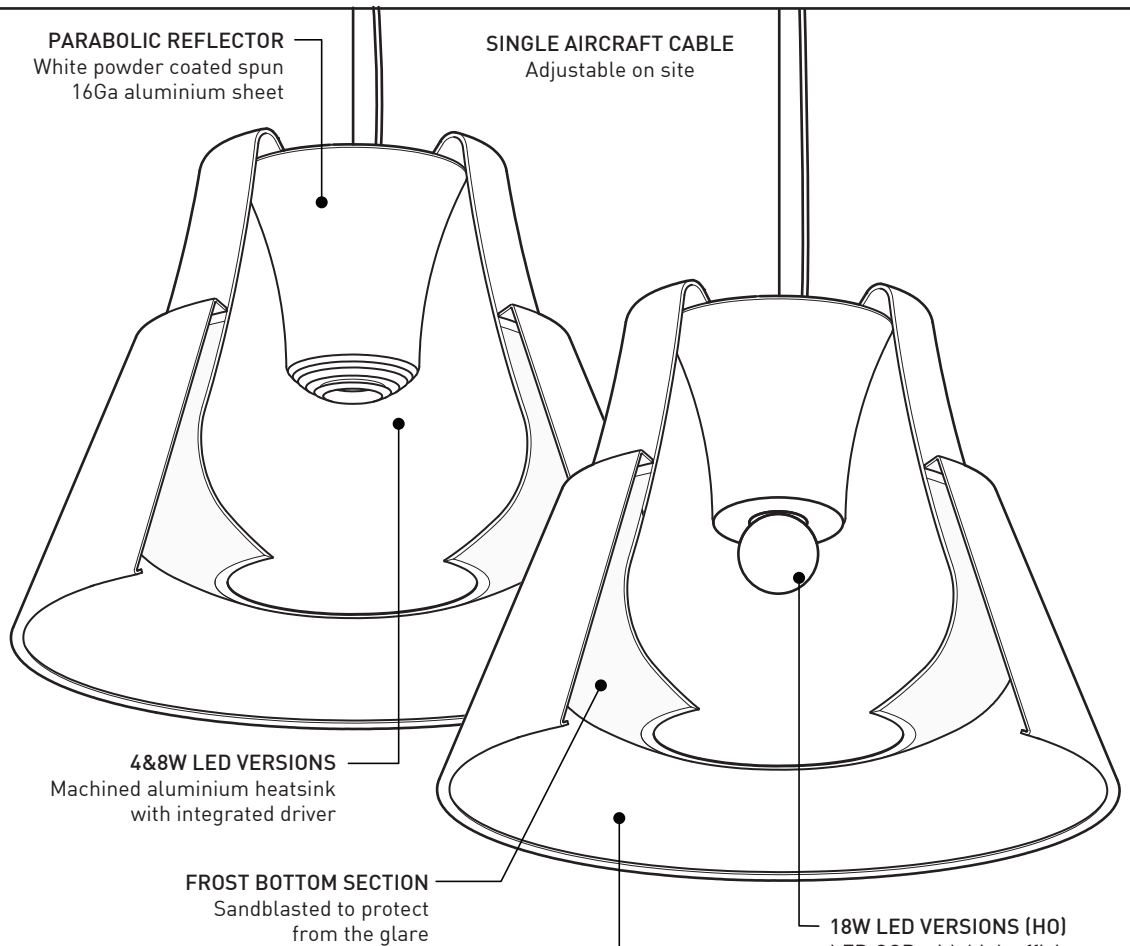


4&8W LED VERSIONS
Machined aluminium heatsink
with integrated driver

FROST BOTTOM SECTION
Sandblasted to protect
from the glare

SPUN ALUMINIUM SHADE
The severe geometrical shape contrast
with the soft curves of the glass

18W LED VERSIONS (H0)
LED COB with high efficiency
spherical diffuser



4255-UFL (BARE)




4255-UCR (SKIRT)

SPECIFICATIONS


	LED 4W	LED 8W	LED 18W
LIGHT SOURCE	4x high power LED (total 4.7W)	4x high power LED (total 9.8W)	1x COB LED (total 18W)
DELIVERED LUMENS	478lm (4000K)	875lm (4000K)	1304lm (4000K)
CRI	84 CRI (Typical)		
DRIVER	CC 350mA	CC 700mA	CC 500mA
DIMMING	Phase dimming (DP) or 0-10V dimming (DV)		
LM-79	On request		On request
WARRANTY	5 years		

SPECIFICATIONS


	COMPACT FLUO G24Q	COMPACT FLUO GU24	INCANDESCENT
LIGHT SOURCE	13W, 18W, 26/32W	Spiral 26W self ballasted	A19, T10 100W
DIMMING	Advance Mark 7&10, Lutron EcoSystem	Dimmable light bulb only	Always
VOLTAGE	120-277V, 347V (non-dimming)	120V	120V

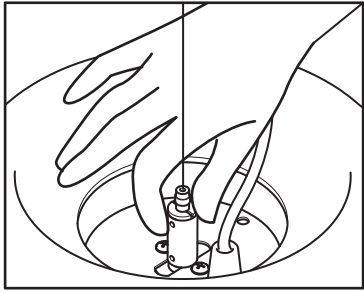


REFLECTEUR PARABOLIQUE
Aluminium repoussé 16Ga
Peinture blanche en poudre

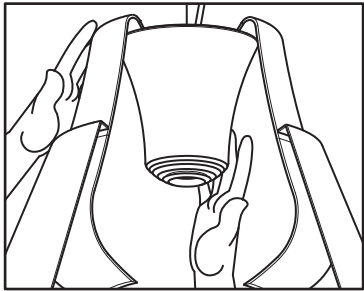

UN CABLE D'ACIER
Adjustable en chantier

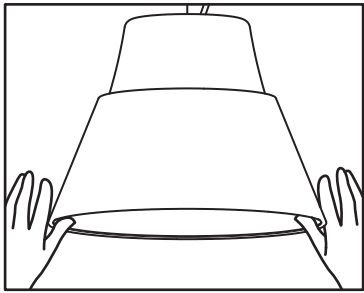

VERSIONS DEL 4W et 8W
Radiateur en aluminium machiné
avec unité d'alimentation intégrée

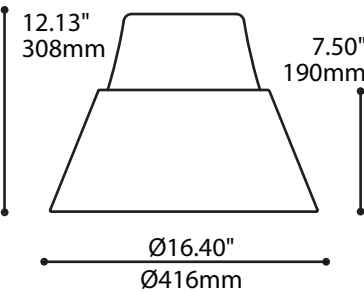

SECTION DU BAS GIVRÉE
Surface du dessous traitée au sable
pour minimiser l'éblouissement

ABAT-JOUR D'ALUMINIUM REPOUSSÉ
Les angles bruts contrastent avec les douces
courbes du verre Feuille d'aluminium de 16Ga

VERSION DEL 18W (HO)
DEL COB avec diffuseur
sphérique de haute efficacité



4255-UFL (BARE)



4255-UCR (SKIRT)

SPÉCIFICATIONS

SOURCE LUMINEUSE
LUMENS RÉELS
IRC
ALIMENTATION
GRADATION
LM-79
GARANTIE

LED 4W

4x DEL haute intensité (total 4.7W)
478lm (4000K)
84 IRC (typique)
CC 350mA
Gradation de type Phase (DP) ou 0-10V (DV)
Sur demande
5 ans

LED 8W

4x DEL haute intensité (total 9.8W)
875lm (4000K)
CC 700mA

LED 18W

1x DEL COB (total 18W)
1304lm (4000K)
CC 500mA
Sur demande

SPÉCIFICATIONS

SOURCE LUMINEUSE
GRADATION
VOLTAGE

COMPACT FLUO G24Q

13W, 18W, 26/32W
Advance Mark 7&10, Lutron EcoSystem
120-277V, 347V (sans gradation)

COMPACT FLUO GU24

Spirale 26W ballast intégré
Ampoule à gradation seulement
120V

INCANDESCENT

A19, T10 100W
Toujours
120V