


APERTURE 4256


PROJECT PROJÉT
SPEC TYPE
NOTES



OPTIONS

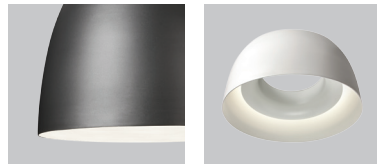

ANTE INTERIOR VIEW

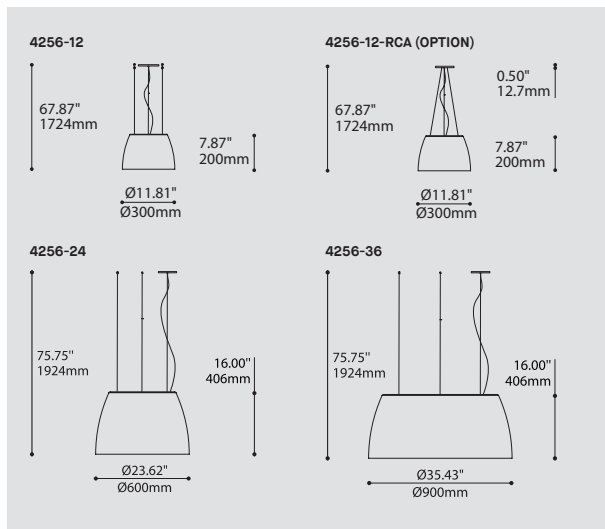

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
4256-12	APERTURE 12"	
4256-24	APERTURE 24"	
4256-36	APERTURE 36"	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)		
4256-12*		
LED	REGULAR OUTPUT	
4256-24		
LED	REGULAR OUTPUT	
4256-36		
LED	REGULAR OUTPUT	
*3983 ACCESSORY IS PROVIDED ONLY FOR 4256-12		
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE.		
CABLE CABLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CABLE		
FOR 4256-12 ONLY IF NO OPTION IS SELECTED, A ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES WILL BE PROVIDED		
RCA	CENTERED ROUND CANOPY - AIRCRAFT CABLES ANGLED TO CENTER	
STRUCTURE FINISH FINI STRUCTURE		WHM
WHM	MATTE WHITE	
EXTERIOR SHADE FINISH FINI ABAT-JOUR EXTÉRIEUR		
WHM	MATTE WHITE	
ANTE	ANTHRACITE FINE TEXTURE	
INTERIOR SHADE FINISH FINI ABAT-JOUR INTÉRIEUR		WHM
WHM	MATTE WHITE	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR 4256-12 AS PER ABOVE)	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: Hidden inside of an elegant form is a beautiful soft glow of LED illumination that encircles a surprising hollow core. Aperture is available in three formats, small, large and extra-large.

INSTALLATION: Easy to install, adjust and level triple aircraft cable mounting.

LIGHT SOURCE: Aperture features a custom LED light engine that is available with a standard dimming driver.

EXTERIOR FINISH: White or Anthracite matte polyester powder coating.

INTERIOR FINISH: Highly reflective matte white polyester powder coating.

CERTIFIED: c-CSA-us

CONCEPTION: Cachée tout au fond de cette forme élégante se trouve une lumière douce et radieuse qui encercle un noyau évidé. L'Aperture est offerte en trois formats, petit, large et extra-large.

INSTALLATION: Câbles de retenue de type aviation facilitant l'installation, l'ajustement et la mise à niveau.

SOURCE LUMINEUSE: Aperture est composée de bandes de DEL sur-mesure offert avec un pilote d'intensité variable.

FINITION EXTERNE: Peinture en poudre de polyester blanc ou anthracite mat.


FINITION INTERNE: Peinture en poudre de polyester hautement réfléchissante blanc mat.

CERTIFIÉ: c-CSA-us

ANATOMY

BIM **DIM** **IES** **LED**

APERTURE

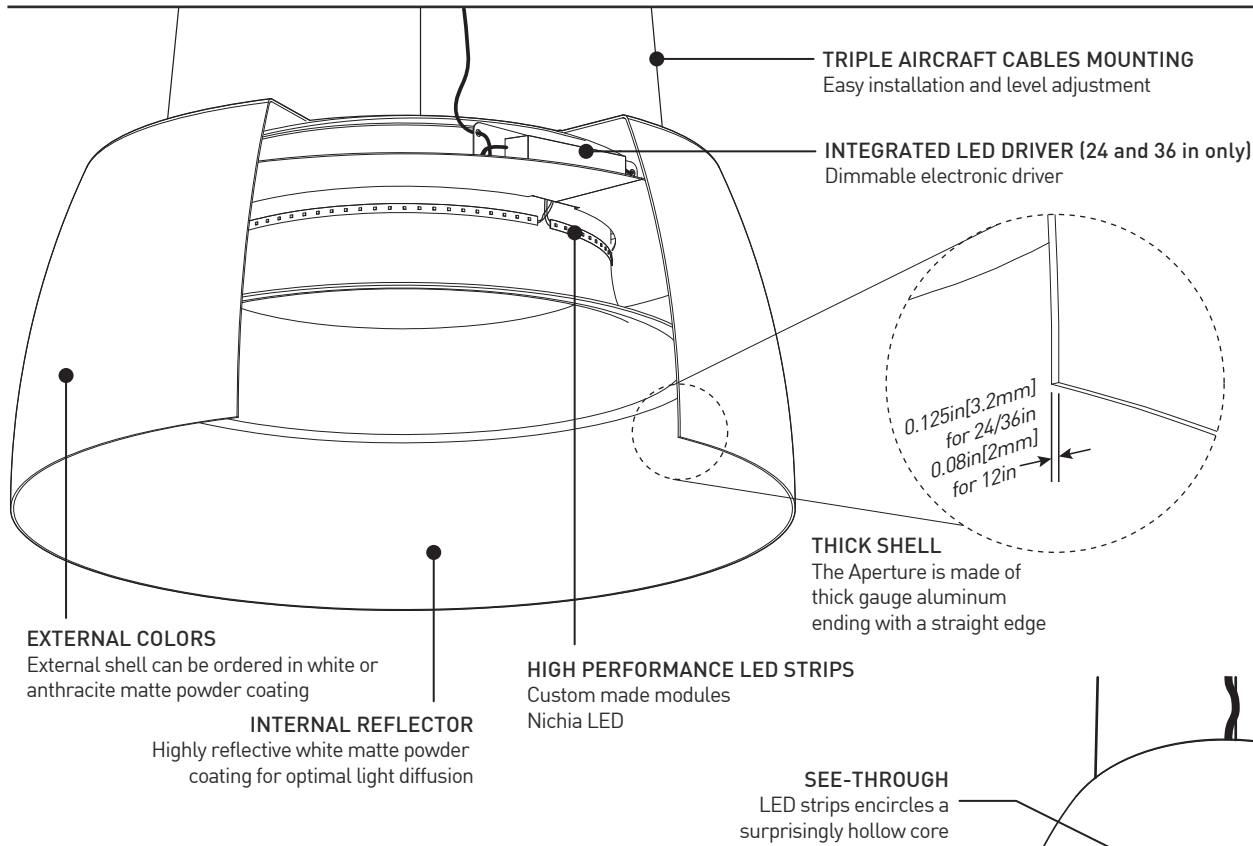

reddot award 2015 winner



reddot 21 world of design

PIA'14
PRODUCT INNOVATION AWARDS
Architectural PRODUCTS

RECOGNIZED WINNER





NGL 2014



VERSATILITY

Available in three different diameters, all versions feature the same shape making it a complete family. Aperture Ø12" (4256-12) is also available with aircraft cables angled to center (RCA option shown below).

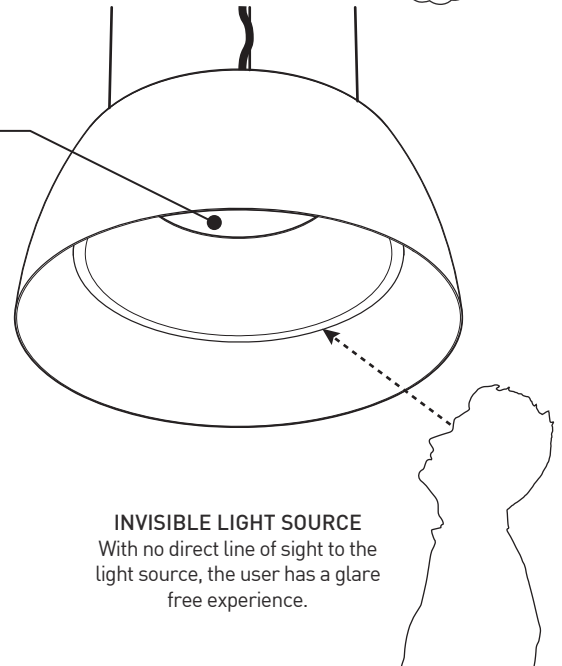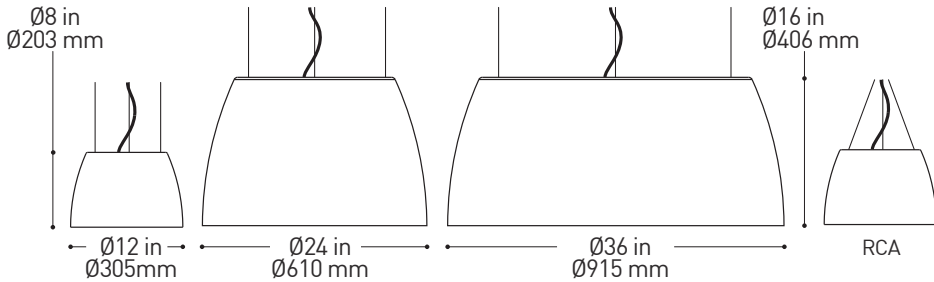

CHARACTERISTICS


	4256-12	4256-24	4256-36
LIGHT SOURCE	39x Nichia	78x Nichia	117x Nichia
DELIVERED LUMENS	~662lm	~1538lm	~2930lm
SYSTEM WATTAGE	16.2W	32.4W	47.9W
MODULE	UL recognized - Custom design flexible strip - Made in USA		
CRI	85 CRI (typical)		
STRUCTURE	Custom aluminum spinning (2mm thickness)		
LIGHT DISTRIBUTION	Indirect reflection on internal reflector (no direct sight view of LED source)		
VOLTAGE	120V or 277V		
DRIVE (DIMMING)	Standard phase (DP) or 0-10V dimming (DV)		
LM-79	On request		
APPROX. WEIGHT	4 lbs (1.8 kg)	14 lbs (6kg)	35 lbs (15.5 kg)
WARRANTY	5 years		



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



4256-12
4256-24
4256-36

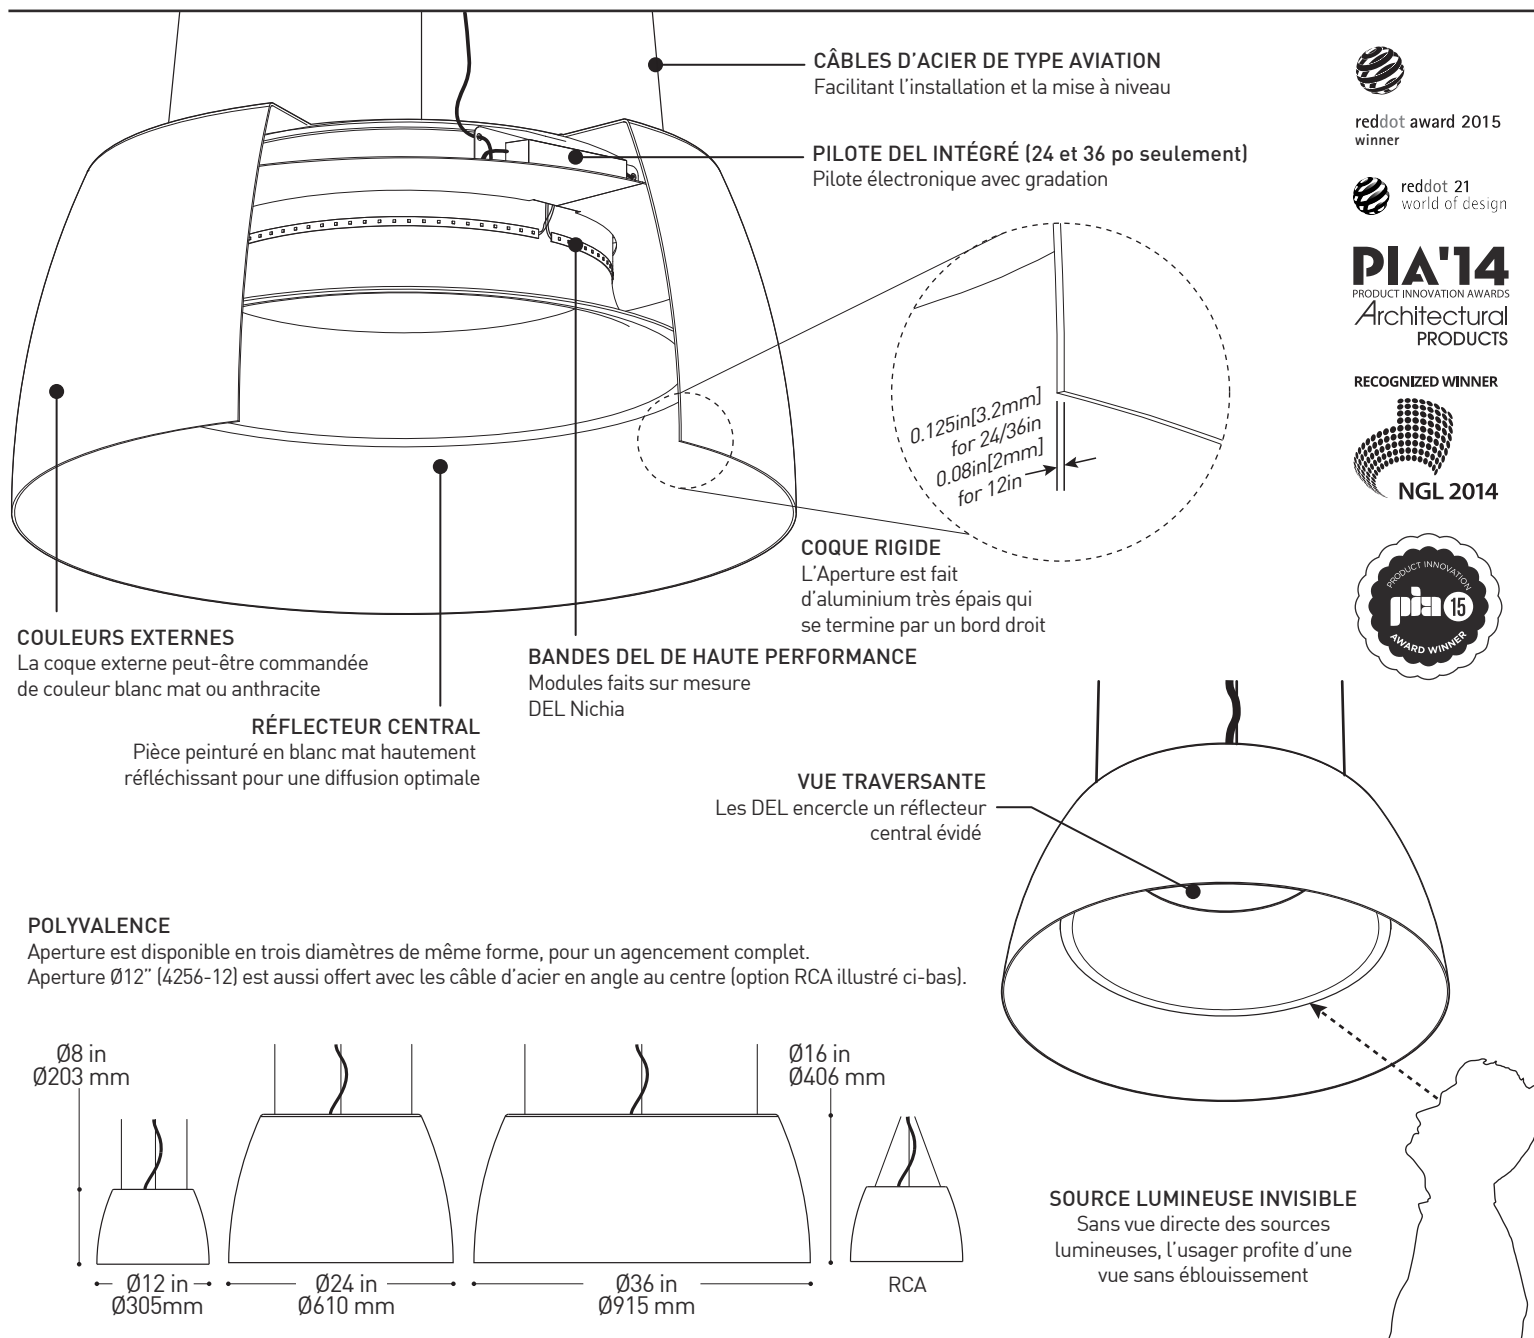

reddot award 2015 winner



reddot 21 world of design

PIA'14
PRODUCT INNOVATION AWARDS
Architectural PRODUCTS

RECOGNIZED WINNER



NGL 2014



CARACTÉRISTIQUES

	4256-12	4256-24	4256-36
SOURCE LUMINEUSE	39x Nichia	78x Nichia	117x Nichia
LUMENS RÉELS	~662lm	~1538lm	~2930lm
CONSOMMATION TOTALE	16.2W	32.4W	47.9W
MODULE	Reconnu par UL - Bande flexible fabriquée sur mesure - Fabriqué au États-Unis		
IRC	85 IRC (typique)		
STRUCTURE	Pièce d'aluminium repoussée fait sur mesure (épaisseur 2mm)		
DISTRIBUTION LUMINEUSE	Réflexion indirecte sur le réflecteur central (sans vue directe sur les sources DEL)		
VOLTAGE	120V ou 277V		
PILOT (GRADATION)	Gradation standard phase (DP) ou 0-10V (DV)		
LM-79	Sur demande		
POIDS APPROX.	4 lbs (1.8 kg)	14 lbs (6kg)	35 lbs (15.5 kg)
GARANTIE	5 ans		



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



4256-12
4256-24
4256-36