

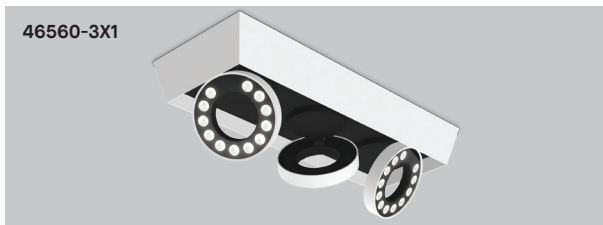
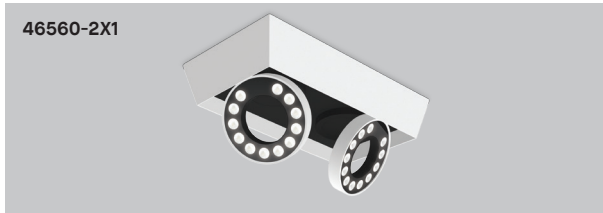


# FLEET 46560

PROJECT PROJÉT
SPEC TYPE
NOTES

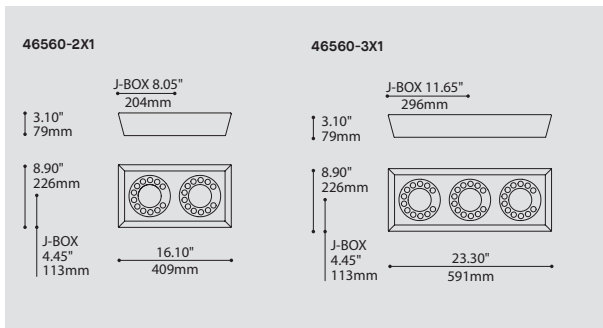

## OPTIONS

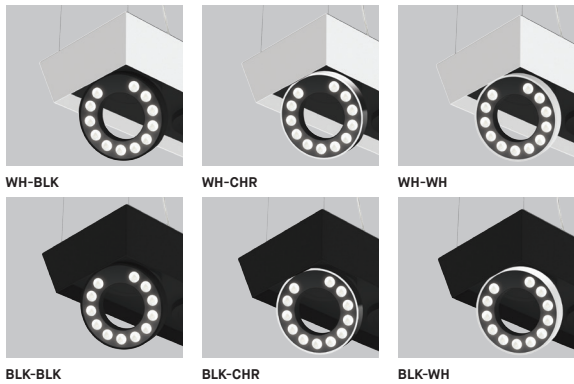

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	CODE
46560-2X1 FLEET 2X1	
46560-3X1 FLEET 3X1	
LIGHT SOURCE SOURCE LUMINEUSE	
(WATTAGE, LAMP TYPE, OTHER INFO)	
46560-2X1	
LED.38	38W, LED
46560-3X1	
LED.50	50W, LED
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	
30	3000K
35	3500K
40	4000K
BEAM ANGLE ANGLE DE FAISCEAU	
18	18°
44	44°
VOLTAGE VOLTAGE	
120V	120 VOLT
277V	277 VOLT
DIMMING OPTION OPTION DE GRADATION	
DV	0-10V DIMMING (120-277V)
DP	PHASE DIMMING (120V ONLY)
LED DIMMING DRIVER IS STANDARD IN THESE PRODUCTS. PLEASE SPECIFY YOUR DIMMING TYPE.	
STRUCTURE FINISH FINI STRUCTURE	
BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
INNER STRUCTURE FINISH FINI STRUCTURE INTÉRIEURE <sup>(A)</sup>	BLKE
BLKE	BLACK FINE TEXTURE
<sup>(A)</sup> INCLUDES MOUNTING PLATE AND PROJECTOR STRUCTURE FINISH	
PROJECTOR FINISH FINI PROJECTEUR	
BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
CHR	CHROME

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



**DESIGN:** Fleet broadens the possibilities of our powerful Dial projector with a modern and distinctive package. This luminaire is available in two formats: small (2 projectors) or large (3 projectors).

**INSTALLATION:** Straightforward installation with no visible screws. The independent projectors can effortlessly be oriented without tools due to their precisely engineered two-axis hinge.

**LIGHT SOURCE:** 2 or 3 LED luminaires for a combined 38 or 50W illumination. Standard 0-10V or phase dimming.

**STRUCTURE:** Precision folded seam welded and polished sheet metal housing, coated with black or white architectural grade fine texture finishes.


**OPTIC:** Multiple TIR optics, Fleet is available with narrow (18° FWHM) or wide (44° FWHM) beam angle. Tempered glass masked with black silkscreen printing isolates the optics to improve performance.

**CERTIFIED:** c-CSA-us

## FAMILY FAMILLE



**QUINCAILLERIE INVISIBLE**  
Assemblage simple sans vis ni quincaillerie apparente.

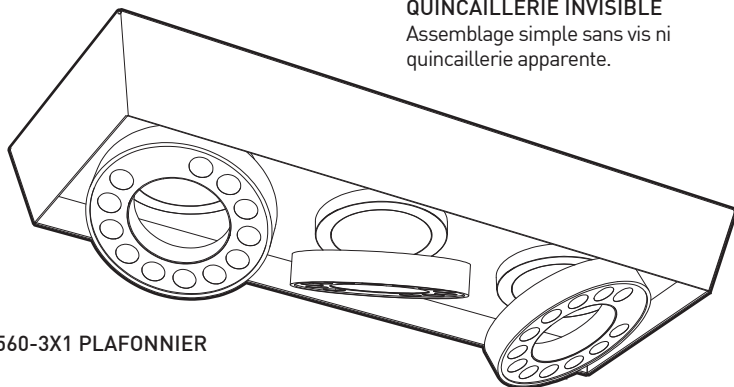


46560-3X1 PLAFONNIER

**BEAUCOUP DE CHOIX**


Fleet élargit les possibilités de notre puissant projecteur Dial avec une enveloppe moderne et distinctive. Offert en deux formats : petit (2 projecteurs) ou grand (3 projecteurs), il inclut toutes les configurations du Dial:  
- Température: 3000K, 3500K ou 4000K  
- Angles de faisceau: 18° ou 44° LMH  
- Gradation: Phase (DP) ou 0-10V (DV)  
- Finition anneau: noir, blanc ou chrome

**TOUT EST DANS LES DÉTAILS**

Boîtier d'acier plié, soudé et poli avec précision recouvert de peinture noire ou blanche finement texturée de grade architectural.

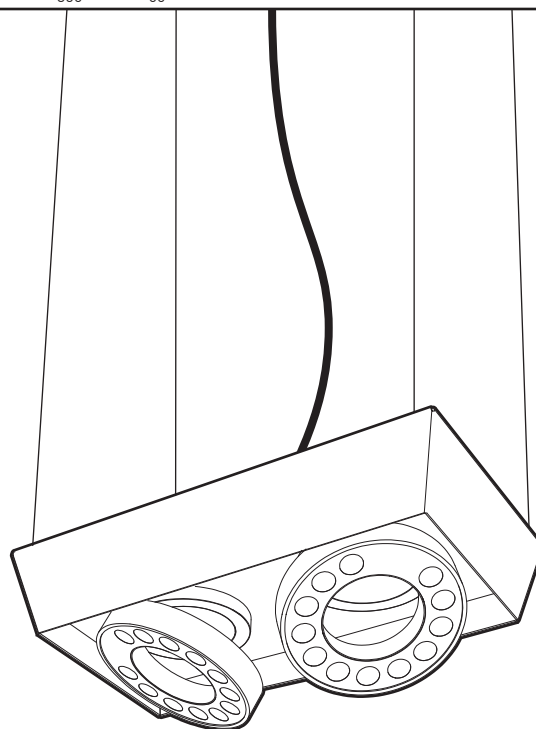

47560-2X1 SUSPENSION

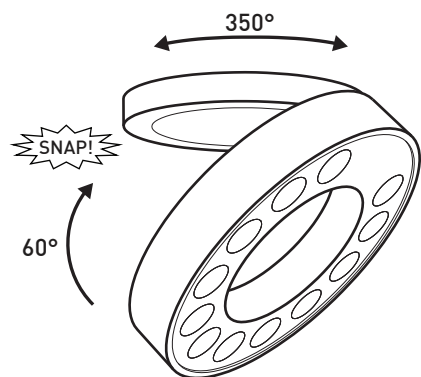


**PROJECTEURS VERSATILES**

Chaque Fleet est équipé de deux ou trois projecteurs offerts en 3000K, 3500K ou 4000K et avec choix de gradation standard. Chaque projecteur tourne sur 350°, pivote de 60° et peut être facilement mis à plat grâce à un système combiné de peinture à friction et d'aimants.


J-BOX 11.65"  
296mm



J-BOX 8.05"  
204mm



8.90"  
226mm



23.30"  
591mm

J-BOX  
4.45"  
113mm

16.10"  
409mm

**SPÉCIFICATIONS**

SOURCE LUMINEUSE  
PUISSANCE SYSTÈME  
LUMENS RÉELS  
IRC  
DISTRIBUTION LUMINEUSE  
OPTIQUES  
STRUCTURE  
RADIATEUR  
VOLTAGE  
UNITÉ D'ALIMENTATION  
GRADATION  
GARANTIE

**4X560-2X1-38W**

2x projecteur DIAL (12x1.5W)  
38W  
2768 lm (4000K)  
83 IRC (typique)  
Projecteur directionnel avec pivot (60°) et rotation (350°)  
Angle de faisceau de 18° & 44° FWHM  
Boîtier d'acier plié, soudé et poli avec précision  
Aluminium noir moulé  
120V (DP) et 120-277V (DV)  
CC 1050mA, Reconnu UL  
Gradation "phase" (DP) et gradation "0-10V" (DV). Pour gradation DP, utiliser un gradateur de type "trailing edge"  
5 ans

**4X560-3X1-50W**

3x projecteur DIAL (12x1.5W)  
50W  
3717 lm (4000K)  
CC 1400mA, Reconnu UL




225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com



46560  
47560

### INVISIBLE FASTENERS

Straightforward installation with no visible screws.

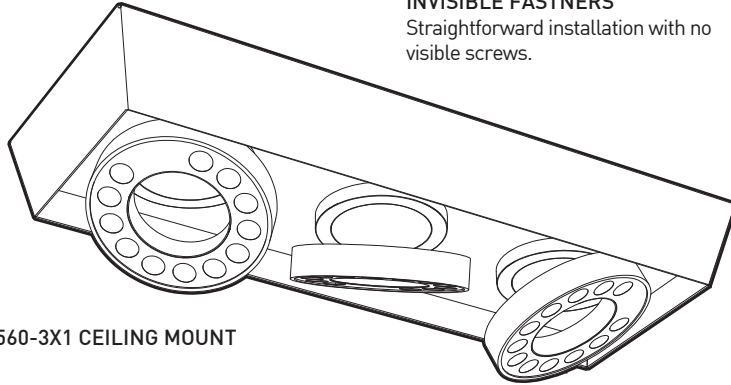

46560-3X1 CEILING MOUNT


### SO MANY OPTIONS

Fleet broadens the possibilities of our powerful Dial projector with a modern and distinctive package. Available in two formats: small (2 projectors) or large (3 projectors) it features all of the standard product configurations of Dial:


- CCT: 3000K, 3500K or 4000K
- Beam angles: 18° & 44° FWHM
- Dimming: Phase (DP) or 0-10V (DV)
- Ring finish: Black white or chrome

### ALL ABOUT THE DETAILS

Precision folded seam welded and polished sheet metal housing, coated with black or white architectural grade fine texture finishes.

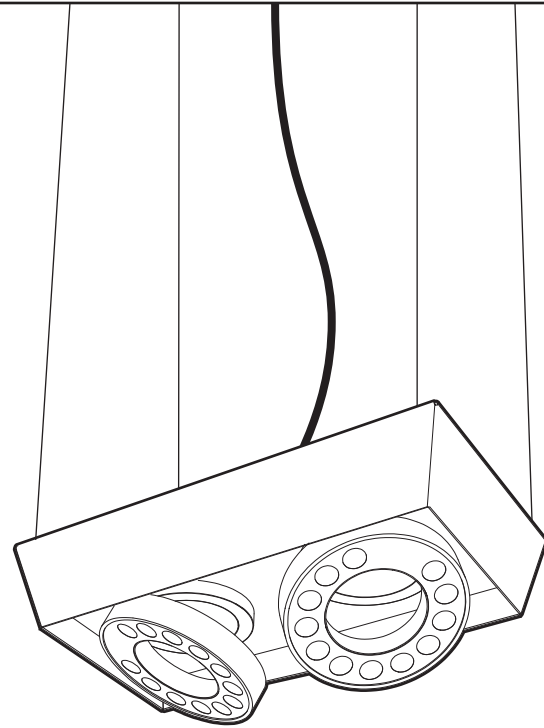


47560-2X1 PENDANT

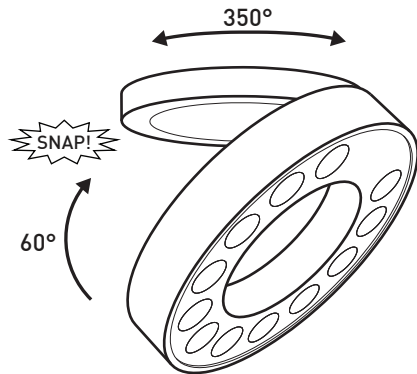


### VERSATILE PROJECTORS

Each Fleet is equipped with 2 or 3 projectors available in 3000K, 3500K or 4000K and a choice of dimming solutions. Projectors can independently rotate 350°, can be angled up to 60° and can be snapped easily into flat position due to its clever hinge and magnet system.


J-BOX 11.65"  
296mm




J-BOX 8.05"  
204mm



3.10"  
79mm



8.90"  
226mm



23.30"  
591mm

J-BOX  
4.45"  
113mm

16.10"  
409mm

## SPECIFICATIONS

LIGHT SOURCE  
SYSTEM POWER  
DELIVERED LUMENS  
CRI  
LIGHT DISTRIBUTION  
OPTICS  
STRUCTURE  
HEATSINK  
VOLTAGE  
DRIVER  
DIMMING  
WARRANTY

### 4X560-2X1-38W

2x DIAL projector (12x1.5W)  
38W  
2768 lm (4000K)  
83 CRI (typical)  
Directional projector with 60° pivot and 350° rotation  
18° & 44° 18° & 44° FWHM beam angle  
Precision folded seam welded and polished sheet metal housing  
Black diecast aluminum  
120V (DP) and 120-277V (DV)  
CC 1050mA, UL Recognized  
Phase dimming (DP) and 0-10V dimming (DV). For DP dimming, use trailing edge type dimmer.  
5 years

### 4X560-3X1-50W

3x DIAL projector (12x1.5W)  
50W  
3717 lm (4000K)  
CC 1400mA, UL Recognized