


# CLOUD 4700

PROJECT PROJET
SPEC TYPE
NOTES

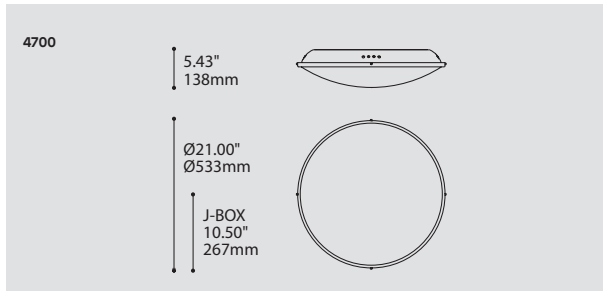

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	CODE
4700 CLOUD	4700

### LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

2XCF.D.26		26W X 2, CFL, DOUBLE TWIN TUBE, G24Q3 BASE (DIMMABLE ONLY)
2XCF.T.32		26/32W X 2, CFL, DOUBLE / TRIPLE TWIN TUBE, G24Q3 BASE
LED		REGULAR OUTPUT

### COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY

30	3000K
35	3500K
40	4000K

### VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT
347V*	347 VOLT

\*ONLY AVAILABLE WITH 2XCF.T.32

### DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH 2XCF.D.26 ONLY

DM1	ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST
DM7	ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST
DED	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)
DE3	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)

AVAILABLE WITH LED ONLY

DV	0-10V DIMMING (120-277V)
DP	PHASE DIMMING (120V ONLY)

LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.

### EMERGENCY BATTERY BATTERIE D'URGENCE

AVAILABLE WITH 2XCF.T.32, 120V OR 277V ONLY  
NOT AVAILABLE WITH A DIMMING BALLAST

REM <sup>(1)</sup>	REMOTE EMERGENCY BATTERY
--------------------	--------------------------

<sup>(1)</sup> 3981 ACCESSORY IS REQUIRED FOR THIS OPTION

### DIFFUSER FINISH FINI DIFFUSEUR

WH	WHITE	WH
----	-------	----

### ACCESSORY ACCESSOIRE

3981	JUNCTION BOX FOR CFL REMOTE EMERGENCY BATTERY
------	---

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- IES
- REM

<b>DESIGN:</b>	Billowing direct / indirect illumination, accented by a delicate white ring around its perimeter.
<b>LIGHT SOURCE:</b>	Energy saving and dimmable fluorescent and LED light sources. EM option is available.
<b>STRUCTURE:</b>	Die-formed steel with polyester powder coat paint finish.
<b>DIFFUSER:</b>	Vacuum formed white translucent acrylic.
<b>CERTIFIED:</b>	c-CSA-us
<b>CONCEPTION:</b>	Nuée lumineuse direct / indirect accentué par un délicat anneau blanc en bordure.
<b>SOURCE LUMINEUSE:</b>	Fluorescents à faible consommation, DEL et ballasts à gradation et d'urgence disponibles.
<b>STRUCTURE:</b>	Acier embouti avec peinture électrostatique à base de polyester.
<b>DIFFUSEUR:</b>	Acrylique translucide blanc thermoformé.
<b>CERTIFIÉ:</b>	c-CSA-us