

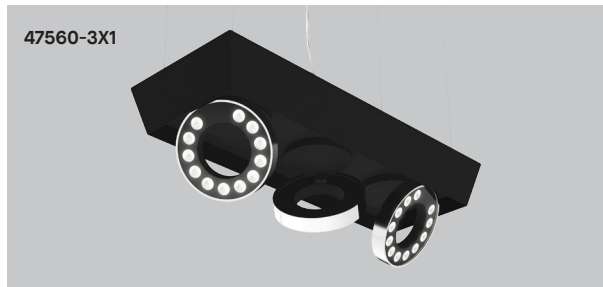


FLEET 47560

PROJECT PROJÉT
SPEC TYPE
NOTES

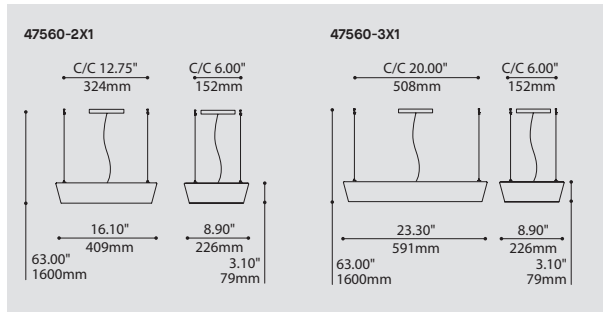

OPTIONS

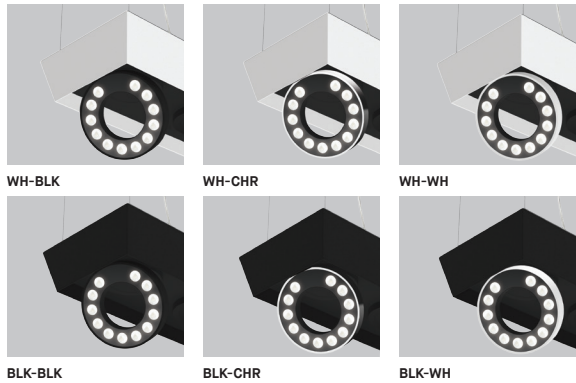

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE


MODEL MODÈLE	CODE
47560-2X1 FLEET 2X1	
47560-3X1 FLEET 3X1	
LIGHT SOURCE SOURCE LUMINEUSE	
(WATTAGE, LAMP TYPE, OTHER INFO)	
47560-2X1	
LED.38	38W, LED
47560-3X1	
LED.50	50W, LED
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	
30	3000K
35	3500K
40	4000K
BEAM ANGLE ANGLE DE FAISCEAU	
18	18°
44	44°
VOLTAGE VOLTAGE	
120V	120 VOLT
277V	277 VOLT
DIMMING OPTION OPTION DE GRADATION	
DV	0-10V DIMMING (120-277V)
DP	PHASE DIMMING (120V ONLY)
LED DIMMING DRIVER IS STANDARD IN THESE PRODUCTS. PLEASE SPECIFY YOUR DIMMING TYPE.	
CABLE CABLE	AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE
CABLE LENGTH LONGUEUR DE CABLE	
60	60" AIRCRAFT CABLE (STD LENGTH)
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.
STRUCTURE FINISH FINI STRUCTURE	
BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
INNER STRUCTURE FINISH FINI STRUCTURE INTÉRIEURE ^(A)	BLKE
BLKE	BLACK FINE TEXTURE
^(A) INCLUDES MOUNTING PLATE AND PROJECTOR STRUCTURE FINISH	
PROJECTOR FINISH FINI PROJECTEUR	
BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
CHR	CHROME

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** Fleet broadens the possibilities of our powerful Dial projector with a modern and distinctive package. This luminaire is available in two formats: small (2 projectors) or large (3 projectors).
- LIGHT SOURCE:** Two or three LED luminaires for a combined 38W or 50W of high output illumination. Standard 0-10V or phase dimming.
- STRUCTURE:** Precision folded seam welded and polished sheet metal housing, coated with black or white architectural grade fine texture finishes.
- OPTIC:** Multiple TIR optics, Fleet is available with narrow (18° FWHM) or wide (44° FWHM) beam angle. Tempered glass masked with black silkscreen printing isolates the optics to improve performance.
- CERTIFIED:** c-CSA-us

FAMILY FAMILLE

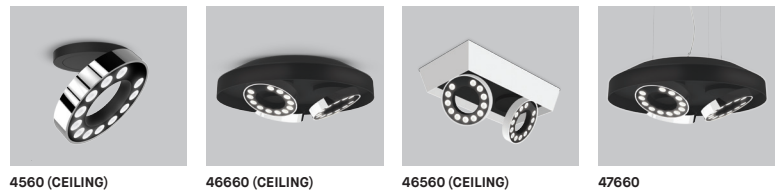

QUINCAILLERIE INVISIBLE
Assemblage simple sans vis ni quincaillerie apparente.

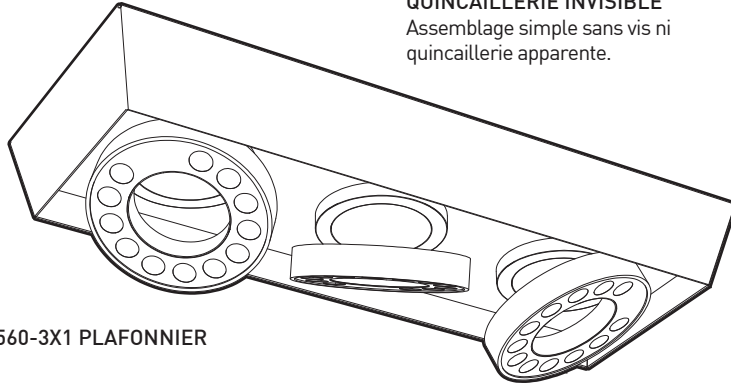


46560-3X1 PLAFONNIER

BEAUCOUP DE CHOIX


Fleet élargit les possibilités de notre puissant projecteur Dial avec une enveloppe moderne et distinctive. Offert en deux formats : petit (2 projecteurs) ou grand (3 projecteurs), il inclut toutes les configurations du Dial:
- Température: 3000K, 3500K ou 4000K
- Angles de faisceau: 18° ou 44° LMH
- Gradation: Phase (DP) ou 0-10V (DV)
- Finition anneau: noir, blanc ou chrome

TOUT EST DANS LES DÉTAILS

Boîtier d'acier plié, soudé et poli avec précision recouvert de peinture noire ou blanche finement texturée de grade architectural.

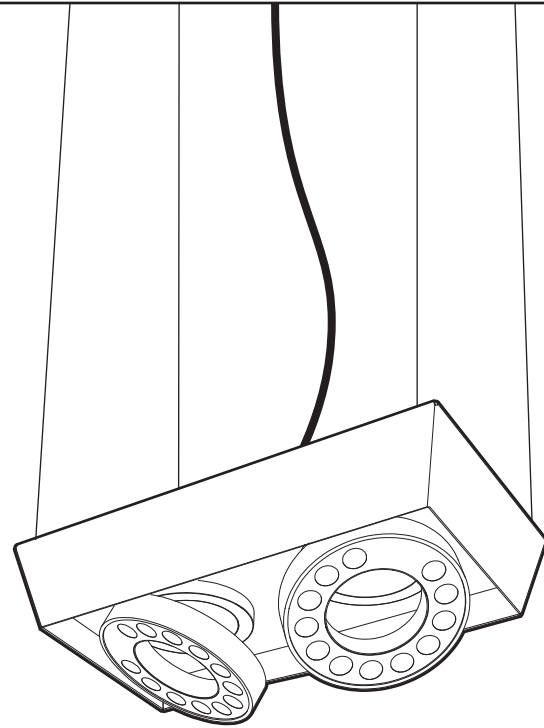


47560-2X1 SUSPENSION

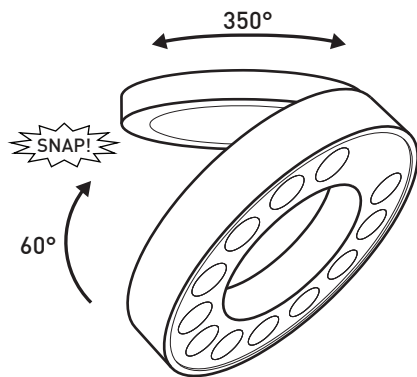


PROJECTEURS VERSATILES

Chaque Fleet est équipé de deux ou trois projecteurs offerts en 3000K, 3500K ou 4000K et avec choix de gradation standard. Chaque projecteur tourne sur 350°, pivote de 60° et peut être facilement mis à plat grâce à un système combiné de peinture à friction et d'aimants.


J-BOX 11.65"
296mm




J-BOX 8.05"
204mm



3.10"
79mm



8.90"
226mm



23.30"
591mm

J-BOX
4.45"
113mm

16.10"
409mm

SPÉCIFICATIONS

SOURCE LUMINEUSE
PUISSANCE SYSTÈME
LUMENS RÉELS
IRC
DISTRIBUTION LUMINEUSE
OPTIQUES
STRUCTURE
RADIATEUR
VOLTAGE
UNITÉ D'ALIMENTATION
GRADATION
GARANTIE

4X560-2X1-38W

2x projecteur DIAL (12x1.5W)
38W
2768 lm (4000K)
83 IRC (typique)
Projecteur directionnel avec pivot (60°) et rotation (350°)
Angle de faisceau de 18° & 44° FWHM
Boîtier d'acier plié, soudé et poli avec précision
Aluminium noir moulé
120V (DP) et 120-277V (DV)
CC 1050mA, Reconnu UL
Gradation "phase" (DP) et gradation "0-10V" (DV). Pour gradation DP, utiliser un gradateur de type "trailing edge"
5 ans

4X560-3X1-50W

3x projecteur DIAL (12x1.5W)
50W
3717 lm (4000K)
CC 1400mA, Reconnu UL




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



46560
47560

INVISIBLE FASTENERS

Straightforward installation with no visible screws.

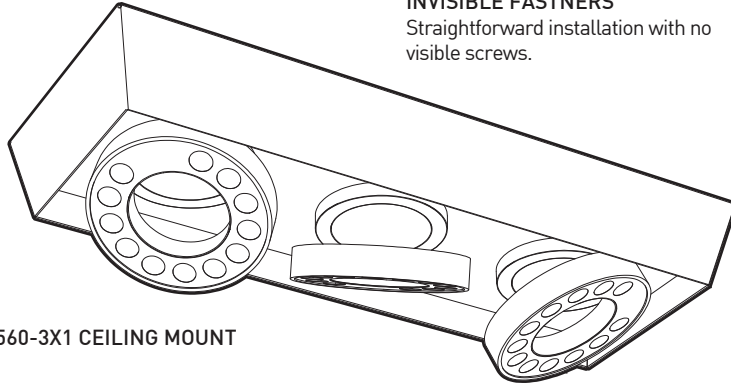

46560-3X1 CEILING MOUNT


SO MANY OPTIONS

Fleet broadens the possibilities of our powerful Dial projector with a modern and distinctive package. Available in two formats: small (2 projectors) or large (3 projectors) it features all of the standard product configurations of Dial:


- CCT: 3000K, 3500K or 4000K
- Beam angles: 18° & 44° FWHM
- Dimming: Phase (DP) or 0-10V (DV)
- Ring finish: Black white or chrome

ALL ABOUT THE DETAILS

Precision folded seam welded and polished sheet metal housing, coated with black or white architectural grade fine texture finishes.

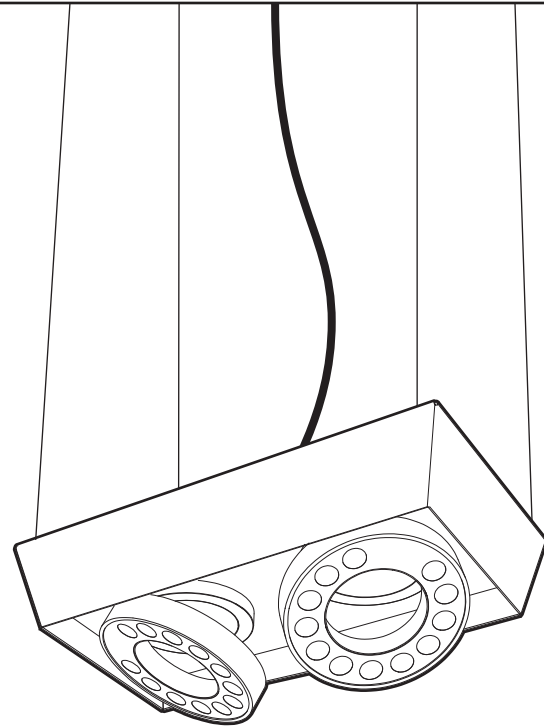


47560-2X1 PENDANT

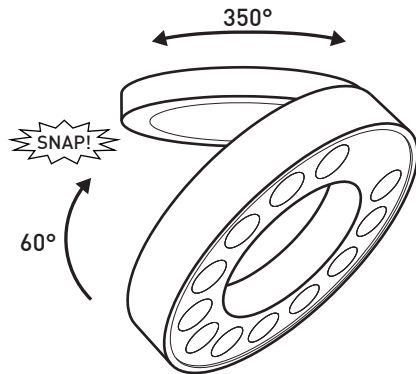

VERSATILE PROJECTORS

Each Fleet is equipped with 2 or 3 projectors available in 3000K, 3500K or 4000K and a choice of dimming solutions. Projectors can independently rotate 350°, can be angled up to 60° and can be snapped easily into flat position due to its clever hinge and magnet system.


J-BOX 11.65"
296mm




J-BOX 8.05"
204mm



3.10"
79mm



8.90"
226mm



23.30"
591mm

J-BOX
4.45"
113mm

16.10"
409mm

SPECIFICATIONS

LIGHT SOURCE
SYSTEM POWER
DELIVERED LUMENS
CRI
LIGHT DISTRIBUTION
OPTICS
STRUCTURE
HEATSINK
VOLTAGE
DRIVER
DIMMING
WARRANTY

4X560-2X1-38W

2x DIAL projector (12x1.5W)
38W
2768 lm (4000K)
83 CRI (typical)
Directional projector with 60° pivot and 350° rotation
18° & 44° 18° & 44° FWHM beam angle
Precision folded seam welded and polished sheet metal housing
Black diecast aluminum
120V (DP) and 120-277V (DV)
CC 1050mA, UL Recognized
Phase dimming (DP) and 0-10V dimming (DV). For DP dimming, use trailing edge type dimmer.
5 years

4X560-3X1-50W

3x DIAL projector (12x1.5W)
50W
3717 lm (4000K)
CC 1400mA, UL Recognized