


# CYCLE XL 4800-115 / 152

PROJECT PROJET
SPEC TYPE
NOTES



## MOUNTING OPTIONS OPTIONS DE MONTAGE

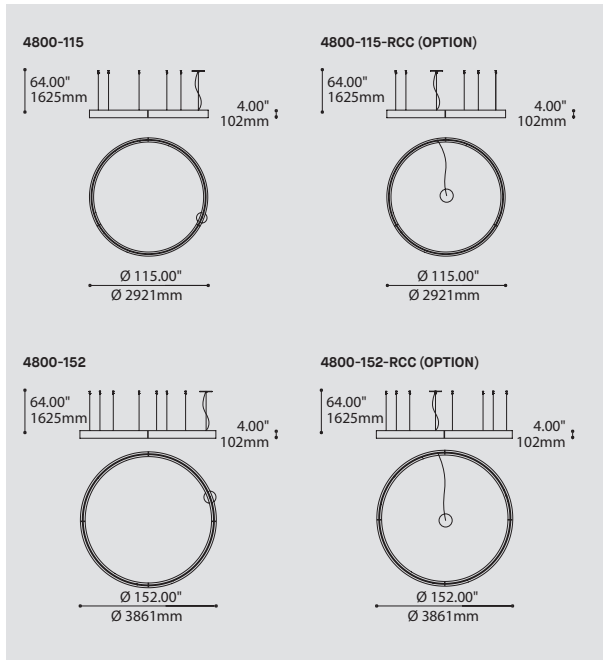

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>		
4800-115	CYCLE XL 115"	
4800-152	CYCLE XL 152"	
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>		
(WATTAGE, LAMP TYPE, OTHER INFO)		
4800-115		
LED	REGULAR OUTPUT	
4800-152		
LED	REGULAR OUTPUT	
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>		
30	3000K	
35	3500K	
40	4000K	
<b>VOLTAGE VOLTAGE</b>		
120V	120 VOLT (120-227V)	
277V	277 VOLT (120V)	
<b>DIMMING OPTION OPTION DE GRADATION</b>		
DV	0-10V DIMMING	
DP	PHASE DIMMING	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE.		
<b>DRIVER POSITION POSITION DU PILOT</b>		
RDP	RECESSED DRIVER*	
*3981D ACCESSORY IS REQUIRED		
<b>CABLE CABLE</b>		<b>AC</b>
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
<b>CABLE LENGTH LONGUEUR DE CABLE</b>		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
<b>MOUNTING OPTION OPTION DE MONTAGE</b>		<b>RC</b>
RC	ROUND CANOPY / PAVILLON ROND FOR RECESSED DRIVER OPTION: 0.25" (2405B) FOR STANDARD: 1.75" CANOPY (2405H)	
<b>MOUNTING CABLE OPTION OPTION DE MONTAGE DE CABLE</b>		
IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES WILL BE PROVIDED		
RCC	CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES	
<b>CANOPY FINISH FINI PAVILLON</b>		<b>WHM</b>
WHM	MATTE WHITE	
<b>RING FINISH FINI ANNEAUX</b>		<b>WHM</b>
WHM	MATTE WHITE	
<b>ACCESSORY ACCESSOIRE</b>		
3981D	JUNCTION BOX FOR RECESSED DRIVER OPTION	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



**DESIGN:** The perfectly diffused direct / indirect illumination of Cycle creates a luminous halo that fills huge spaces with presence, elegance and simplicity.

**INSTALLATION:** Shipped in sections, it is easy to assemble and install with our clever joiner system and provided mounting tool. Simply connect, adjust and level all aircraft cables.

**LIGHT SOURCE:** Custom designed and manufactured light engine provides even illumination over the entire surface. Offered with standard 0-10V or phase dimming.

**STRUCTURE:** Rolled concentric aluminum extrusions with highly reflective inner matte white polyester powder coating. The circular shape is composed of three (Ø115") or four sections (Ø152") with discreet joints.

**CERTIFIED:** c-CSA-us

## FAMILY FAMILLE



3800 (WALL)


3800 (CEILING)

4800


4844-2 / 4844-3




## SPECIFICATION

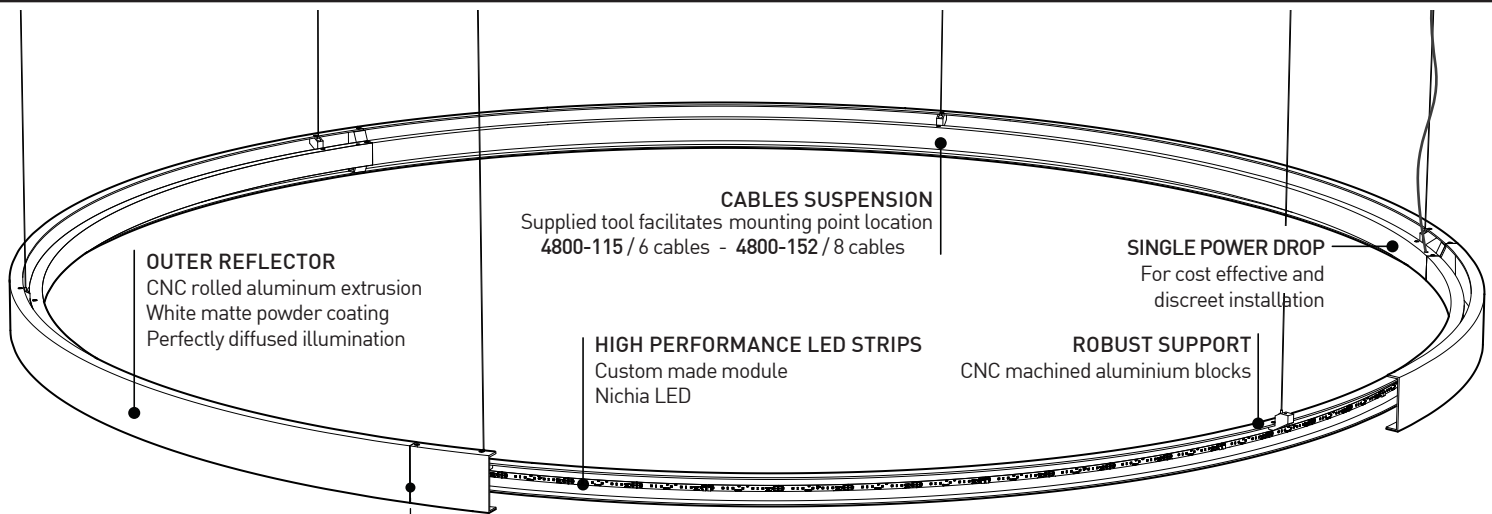

**SIMPLIFIED JOINER CONNECTION**  
 No visible fasteners underneath\*  
 Secure clamping design  
 Matte white finish

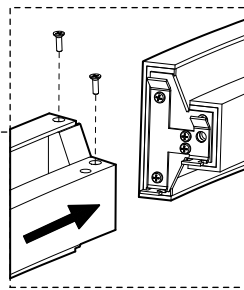


**CANOPY POSITION**

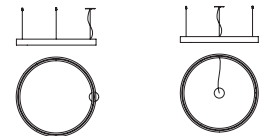


Centered with mounting point (standard)


Centered with luminaire / Straight cables

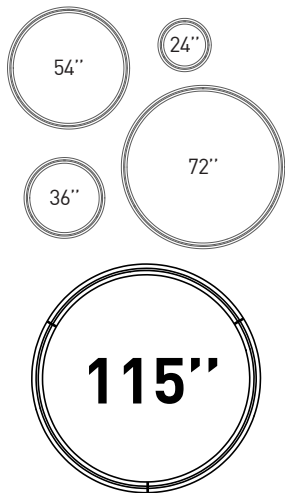


**TWO NEW SIZES**  
 An infinite number of possible layouts  
 From the smallest to the largest space

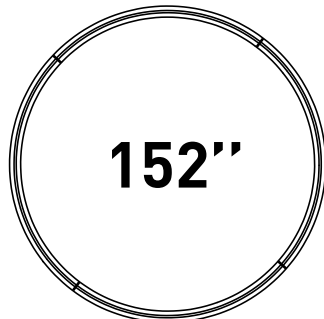

**STANDARD CANOPY / INTEGRATED DRIVER**  
 Mounting on a 4" standard j-box  
 Ø9.1" X 1.75" H



**LOW PROFILE CANOPY / RECESSED DRIVER**  
 Recessed drivers for discreet installation  
 Requires 6" clearance above ceiling  
 Mounts on Eureka box 3981D 6" x 6"  
**sold and installed separately**  
 Ø9.4" X 0.25" H

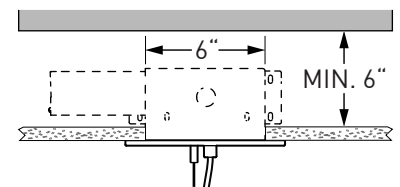

**NOTE\***: Due to its extra large scale, tolerances and its several separate sections, some gaps might be visible between certain joined sections. Although visible, these gaps do not break the continuous look from one section to the next.

### CHARACTERISTICS


	4800-115	4800-152
LIGHT SOURCE	702x Nichia LED	936x Nichia LED
ESTIMATED DELIVERED LUMENS	~6446lm (4000K)	~8977lm (4000K)
SYSTEM WATTAGE	~121W	~159W
LED MODULE	UL Recognized - Designed for Eureka - Made in USA	
CRI	85 CRI (typical)	
STRUCTURE	Custom CNC rolled aluminium extrusions (0.125in thickness) / Discreet joint	
LIGHT DISTRIBUTION	50% Direct/ 50% Indirect	
VOLTAGE	120V or 277V	
DRIVER	Phase (DP) or 0-10V (DV) standard dimming	
WARRANTY	5 years	
WEIGHT (PACKED)	50 lbs approx.	75 lbs approx.



225 de Liège Ouest, Suite #200  
 Montréal (QC), Canada H2P 1H4  
 Tel : 514.385.3515 Fax : 514.385.4169  
 www.eurekalighting.com



**4800-115**  
**4800-152**

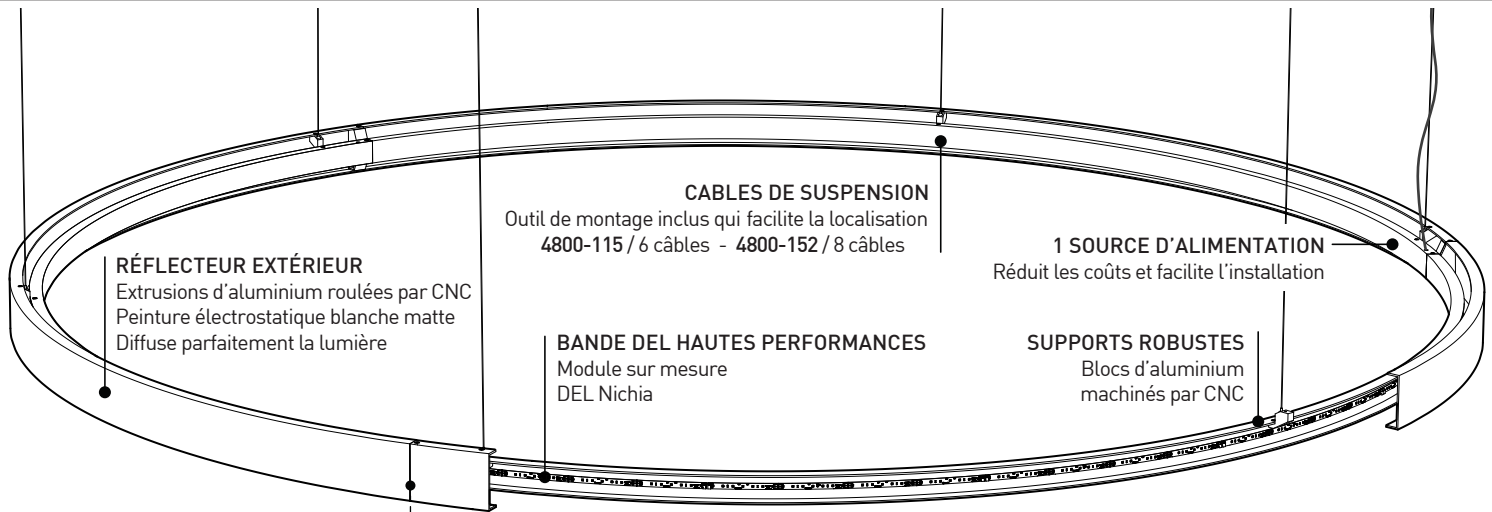

**RÉFLECTEUR EXTÉRIEUR**

Extrusions d'aluminium roulées par CNC  
Peinture électrostatique blanche matte  
Diffuse parfaitement la lumière

**CABLES DE SUSPENSION**

Outil de montage inclus qui facilite la localisation  
4800-115 / 6 câbles - 4800-152 / 8 câbles

**1 SOURCE D'ALIMENTATION**

Réduit les coûts et facilite l'installation

**BANDE DEL HAUTES PERFORMANCES**


Module sur mesure  
DEL Nichia

**SUPPORTS ROBUSTES**


Blocs d'aluminium  
machinés par CNC

**CONNEXION D'ASSEMBLAGE SIMPLIFIÉ**

Aucune vis visible d'en dessous\*  
Système de fixation sécurisé  
Fini blanc mat




**POSITIONS DU PAVILLON**



Centré avec le  
point de montage  
(standard)


Centré avec le  
luminaire /  
Câbles droits

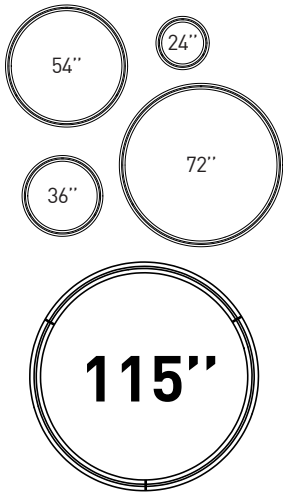

**DEUX NOUVEAUX FORMATS**

Une infinité de combinaisons possibles  
Pour les petits aux plus grands espaces

**OPTIONS DE PAVILLON**




**PAVILLON STANDARD / PILOTE INTÉGRÉ**

S'installe sur une boîte de  
connection standard 4"  
Ø9.1" X 1.75" H

**PAVILLON MINCE / PILOTE ENCASTRÉ**

Nécessite 6" de dégagement dans le plafond  
S'installe sur la boîte de jonction  
Eureka 3981D 6" x 6"

**Vendu & installé séparément**  
Ø9.4" X 0.25" H

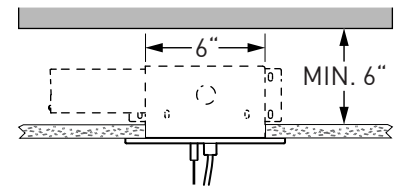

**NOTE\***: En raison de son diamètre extra grand, des tolérances de pièces et de l'assemblage fait de multiples sections; l'écart entre les joints pourrait être visible entre les diverses sections. Quoique visible, ces écarts ne nuisent pas au look continu du Cycle.

**CHARACTERISTICS**

SOURCE LUMINEUSE

LUMENS (LIVRÉS)

CONSUMMATION TOTALE

MODULE DEL

IRC

STRUCTURE

DISTRIBUTION LUMINEUSE

VOLTAGE

PILOTE

GARANTIE

POIDS (EMBALLÉ)

**4800-115**

702x Nichia LED

~6446lm (4000K)

~121W

Reconnu UL - Bandes DEL sur mesure - Fabriqué aux États-Unis

85 CRI (typique)

Extrusions d'aluminium roulées par CNC (0.125po d'épaisseur) / Joint discret

50% Directe / 50% Indirecte

120V ou 277V

Gradation standard phase (DP) ou 0-10V (DV)

5 ans

50 lbs approx.

**4800-152**

936x Nichia LED

~8977lm (4000K)

~159W

75 lbs approx.



225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalingting.com



**4800-115**  
**4800-152**