



ODEON 4805-80 / 118

PROJECT PROJET
SPEC TYPE
NOTES

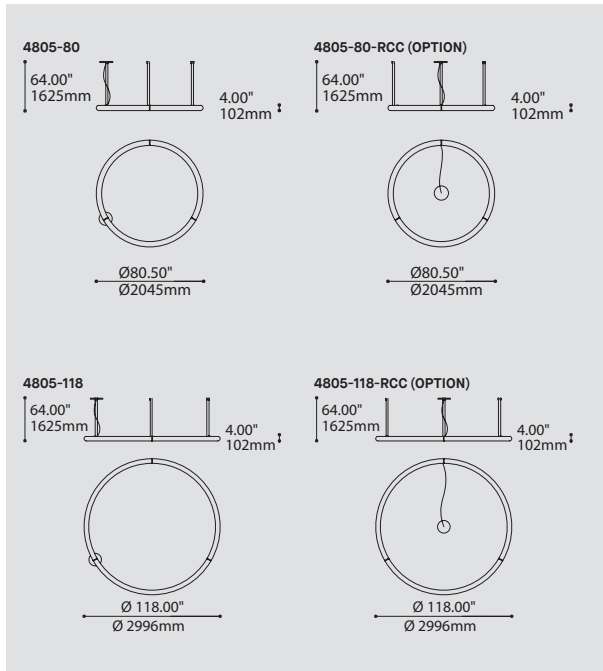

MOUNTING OPTIONS OPTIONS DE MONTAGE

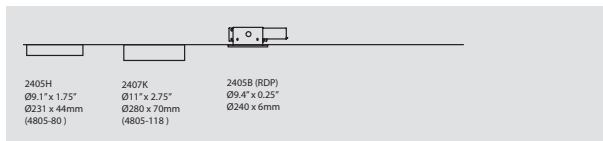

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE

4805-80 ODEON 80"
4805-118 ODEON 118"

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, OTHER INFO)

4805-80
LED REGULAR OUTPUT

4805-118
LED REGULAR OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K
35 3500K
40 4000K

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120-277V)
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT.

DRIVER POSITION POSITION DU PILOT

RDP RECESSED DRIVER*
*3981D ACCESSORY IS REQUIRED

CABLE CABLE

AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CABLE

60 60" AIRCRAFT CABLE (STD LENGTH)
** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING OPTION OPTION DE MONTAGE

RC ROUND CANOPY / PAVILLON ROND
FOR RECESSED DRIVER OPTION: 0.25" (2405B)
FOR STANDARD: 1.75" CANOPY (2405H) (FOR 4805-80 ONLY)
FOR STANDARD: 2.75" CANOPY (2407K) (FOR 4805-118 ONLY)

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CABLE

IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD

RCC CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES

STRUCTURE FINISH FINI STRUCTURE

WH WHITE

DIFFUSER FINISH FINI DIFFUSEUR

WH WHITE

JOINER FINISH FINI JONCTION

CHR CHROME

ACCESSORY ACCESSOIRE

3981D JUNCTION BOX FOR RECESSED DRIVER OPTION

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES** **LED**

DESIGN: Round everybody up for an impressive show. Available in both Ø80" and Ø118", Odeon will brighten up any large space and make a glowing statement of bold elegance.

LIGHT SOURCE: Custom designed curving LED light engine provides even illumination over the entire surface. Available in 3000K, 3500K and 4000K and 0-10V dimming is standard.

STRUCTURE: Circles are formed from three sections of extremely durable rotomolded MDPE and are connected on-site with chromed joiner caps.

CERTIFIED: c-CSA-us

CONCEPTION: Entrez dans le cercle, contemplez ce spectacle. Disponible en deux tailles de Ø80" et Ø118", Odeon saura illuminer tous les grands espaces et leur donnera un éclat d'élégance audacieuse.


SOURCE LUMINEUSE: Module DEL courbé conçu et fabriqué sur mesure, offrant une illumination uniforme sur la totalité de la surface. Disponible en 3000K, 3500K ou 4000K avec gradation de type 0-10V.

STRUCTURE: Les cercles sont faits de trois sections de MDPE rotomoulées très durables connectées lors de l'installation avec des embouts chromés.

CERTIFIÉ: c-CSA-us



SPECIFICATION

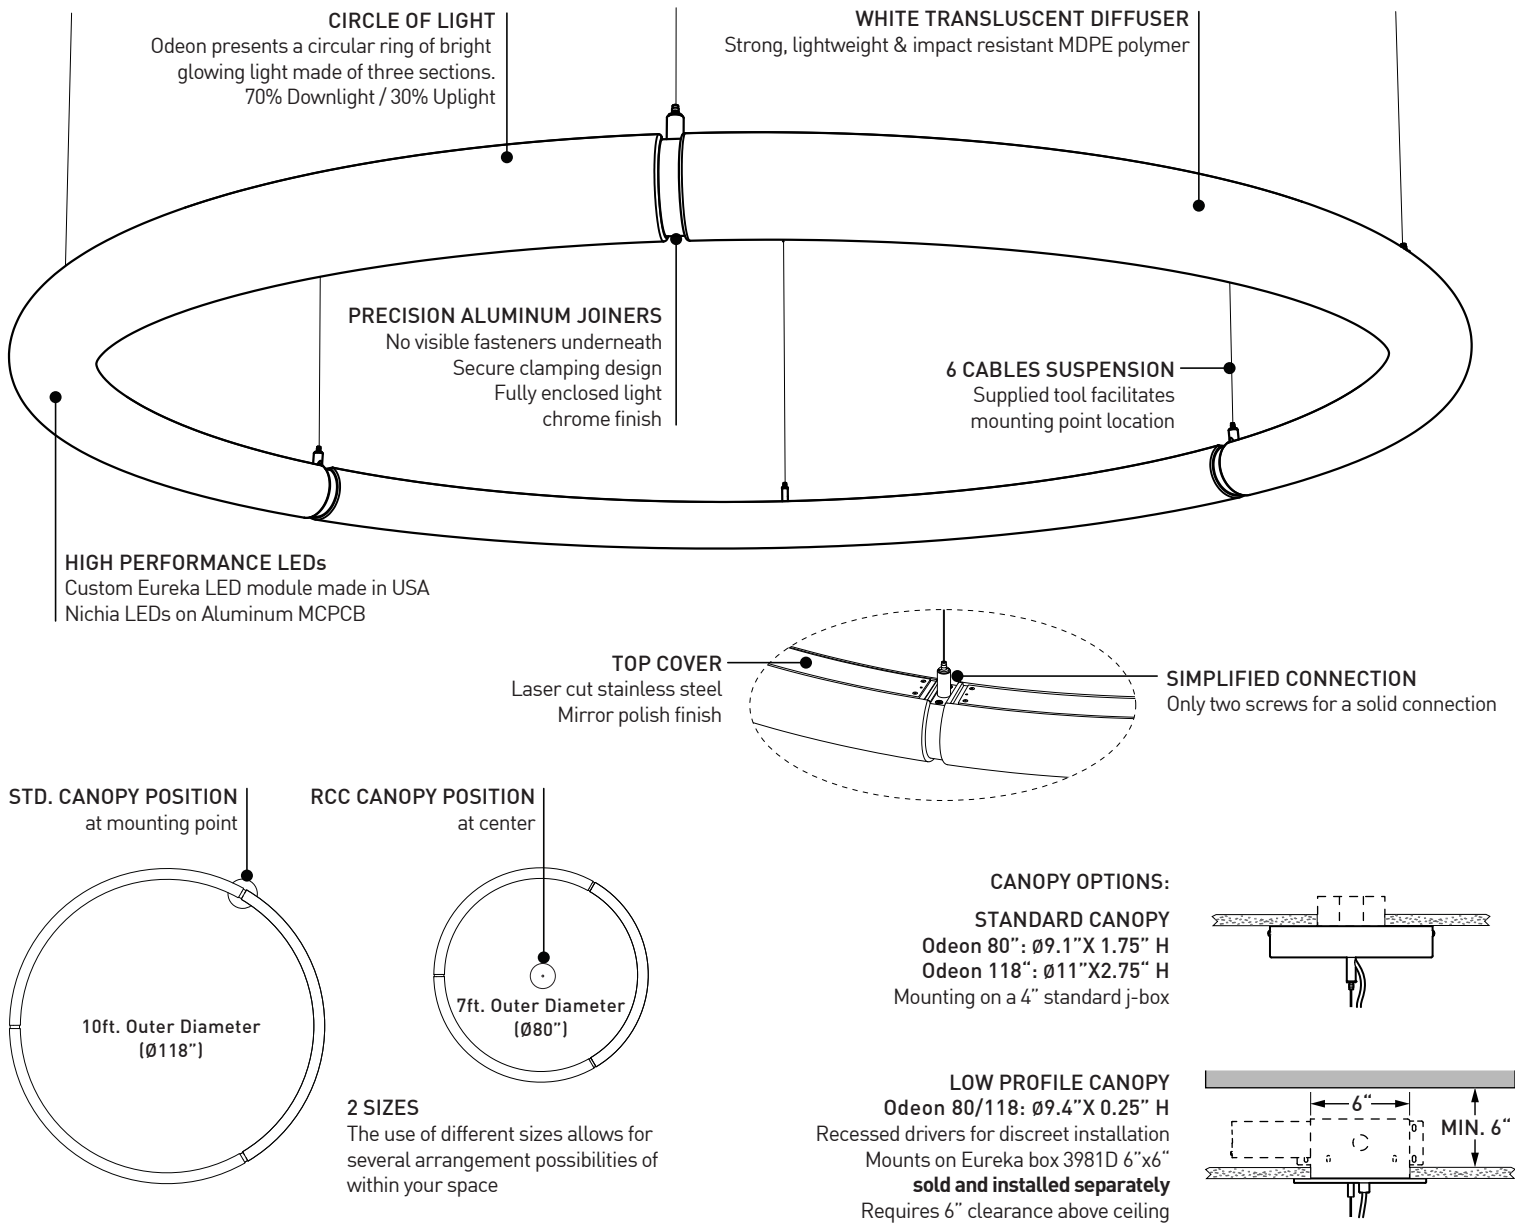

CHARACTERISTICS

4805-80

4805-118


LIGHT SOURCE	432x Nichia LED's ± 414.3W	648x Nichia LED's ± 211.9W
ESTIMATED DELIVERED LUMENS	18502 lm	27900 lm
LED MODULE	UL Recognized - Designed for Eureka - Made in USA	
CRI	85 CRI (typical)	
STRUCTURE	Moulded MDPE diffuser (medium density polyethylene), Mirror polished Stainless steel & Aluminum	
LIGHT DISTRIBUTION	70% Direct/ 30% Indirect	
VOLTAGE	120V or 277V	120V or 277V
DRIVER (DIMMING)	Constant Current 1750mA 75W 120-277V DIM 0-10V	
LM-79	On request	
WARRANTY	5 years	
WEIGHT (PACKED)	30lbs (45lbs packed)	40lbs (55lbs packed)



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com





4805-80 | 4805-118

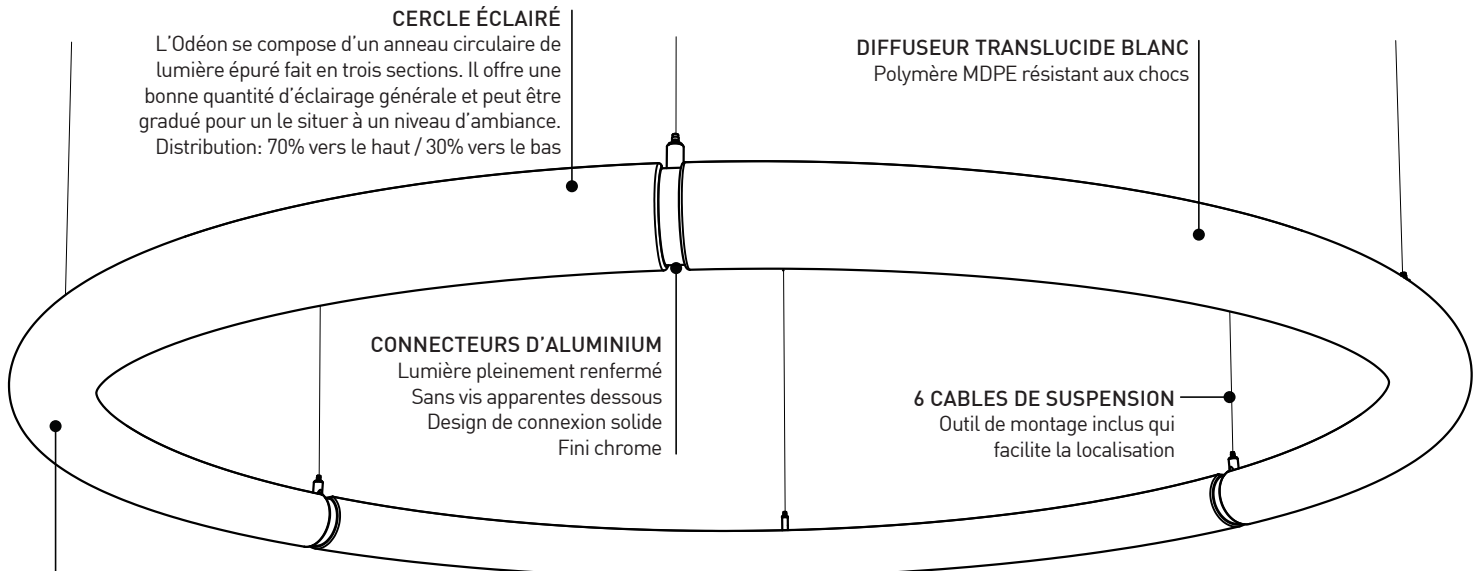

COUVERT DU DESSUS
Acier inoxydable
fini poli miroir


CONNEXION SIMPLIFIÉE
Deux vis pour une connexion sécurisée

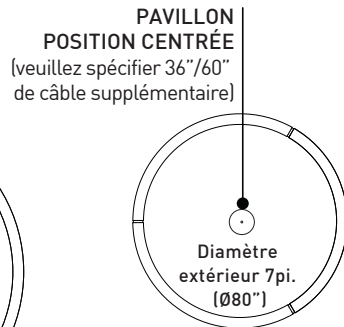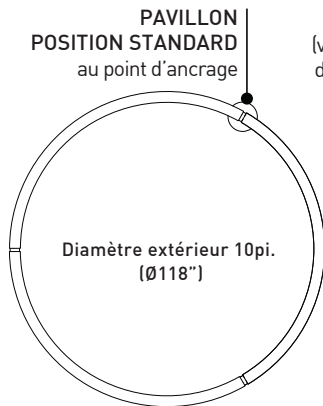


2 GRANDEURS
L'agencement des deux grandeurs dans un espace permet de créer une composition originales

OPTIONS DE PAVILLON:

PAVILLON STANDARD
Odeon 80": Ø9.1" X 1.75" H
Odeon 118": Ø11" X 2.75" H
S'installe sur une boîte de connexion standard

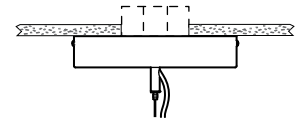

PAVILLON MINCE (RDP)
Odeon 80/118: Ø9.4" X 0.25" H
Pilote encastré pour une installation discrète
S'installe sur: la boîte de jonction Eureka 3981D 6"x6"
Vendue & installé séparément avant le luminaire
Nécessite 6" de dégagement dans le plafond

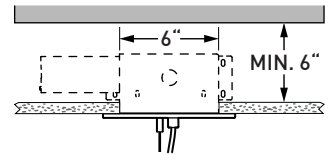

CHARACTERISTICS

4805-80

4805-118

SOURCE LUMINEUSE	432x DELs Nichia ± 414.3W	648x DELs Nichia LED's ± 211.9W
LUMENS (LIVRÉS)	18502 lm	27900 lm
MODULE DEL	Reconnu UL - exclusif d'Eureka - Fabriqué aux États-Unis	
IRC	85 IRC (typique)	
STRUCTURE	Diffuseur moulé MDPE (polyéthylène densité moyenne), Acier inoxydable poli mirror, Aluminium	
DISTRIBUTION LUMINEUSE	70% Directe/ 30% Indirecte	
VOLTAGE	120V ou 277V	120V ou 277V
PILOTE	Constant Courant 1750mA 75W 120-277V DIM 0-10V	
LM-79	On request	
GARANTIE	5 ans	
POIDS (EMBALLÉ)	30lb (45lb)	40lb (55lb)



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



4805-80 | 4805-118