



# ODEON 4805-80 / 118

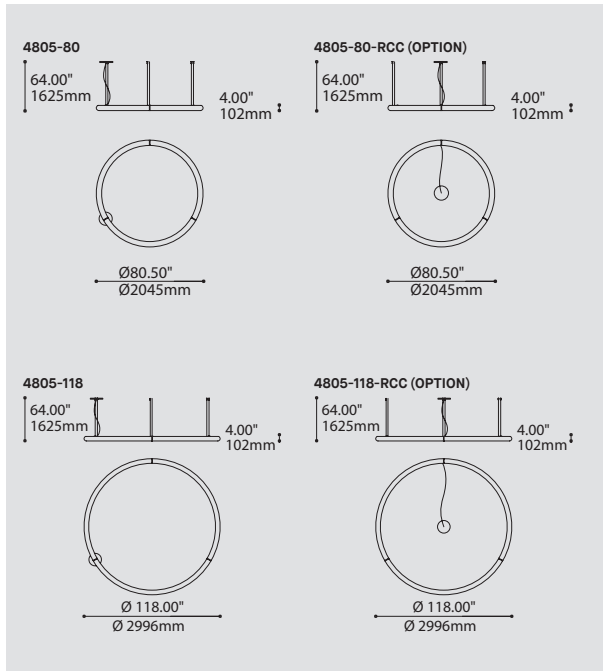


PROJECT PROJET
SPEC TYPE
NOTES

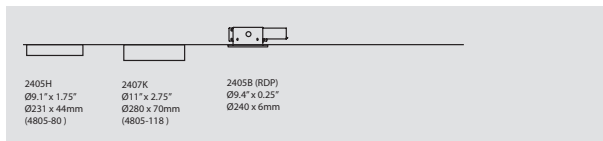

## MOUNTING OPTIONS OPTIONS DE MONTAGE



## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	CODE
4805-80 ODEON 80*	
4805-118 ODEON 118*	
LIGHT SOURCE SOURCE LUMINEUSE	
(WATTAGE, LAMP TYPE, OTHER INFO)	
4805-80	
LED  REGULAR OUTPUT	
4805-118	
LED  REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	
30 3000K	
35 3500K	
40 4000K	
VOLTAGE VOLTAGE	
120V 120 VOLT	
277V 277 VOLT	
DIMMING OPTION OPTION DE GRADATION	DV
DV 0-10V DIMMING (120-277V) LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT.	
DRIVER POSITION POSITION DU PILOT	
RDP RECESSED DRIVER* *3981D ACCESSORY IS REQUIRED	
CABLE CABLE	AC
AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CABLE	
60 60" AIRCRAFT CABLE (STD LENGTH)	
** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MOUNTING OPTION OPTION DE MONTAGE	RC
RC  ROUND CANOPY / PAVILLON ROND FOR RECESSED DRIVER OPTION: 0.25" (2405B) FOR STANDARD: 1.75" CANOPY (2405H) (FOR 4805-80 ONLY) FOR STANDARD: 2.75" CANOPY (2407K) (FOR 4805-118 ONLY)	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CABLE	
IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD	
RCC CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES	
STRUCTURE FINISH FINI STRUCTURE	WH
WH WHITE	
DIFFUSER FINISH FINI DIFFUSEUR	WH
WH WHITE	
JOINER FINISH FINI JONCTION	CHR
CHR CHROME	
ACCESSORY ACCESSOIRE	
3981D JUNCTION BOX FOR RECESSED DRIVER OPTION	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



**DESIGN:** Round everybody up for an impressive show. Available in both Ø80" and Ø118", Odeon will brighten up any large space and make a glowing statement of bold elegance.

**LIGHT SOURCE:** Custom designed curving LED light engine provides even illumination over the entire surface. Available in 3000K, 3500K and 4000K and 0-10V dimming is standard.

**STRUCTURE:** Circles are formed from three sections of extremely durable rotomolded MDPE and are connected on-site with chromed joiner caps.

**CERTIFIED:** c-CSA-us

**CONCEPTION:** Entrez dans le cercle, contemplez ce spectacle. Disponible en deux tailles de Ø80" et Ø118", Odeon saura illuminer tous les grands espaces et leur donnera un éclat d'élégance audacieuse.




**SOURCE LUMINEUSE:** Module DEL courbé conçu et fabriqué sur mesure, offrant une illumination uniforme sur la totalité de la surface. Disponible en 3000K, 3500K ou 4000K avec gradation de type 0-10V.

**STRUCTURE:** Les cercles sont faits de trois sections de MDPE rotomoulées très durables connectées lors de l'installation avec des embouts chromés.

**CERTIFIÉ:** c-CSA-us




## SPECIFICATION

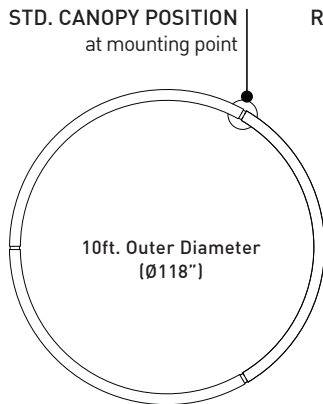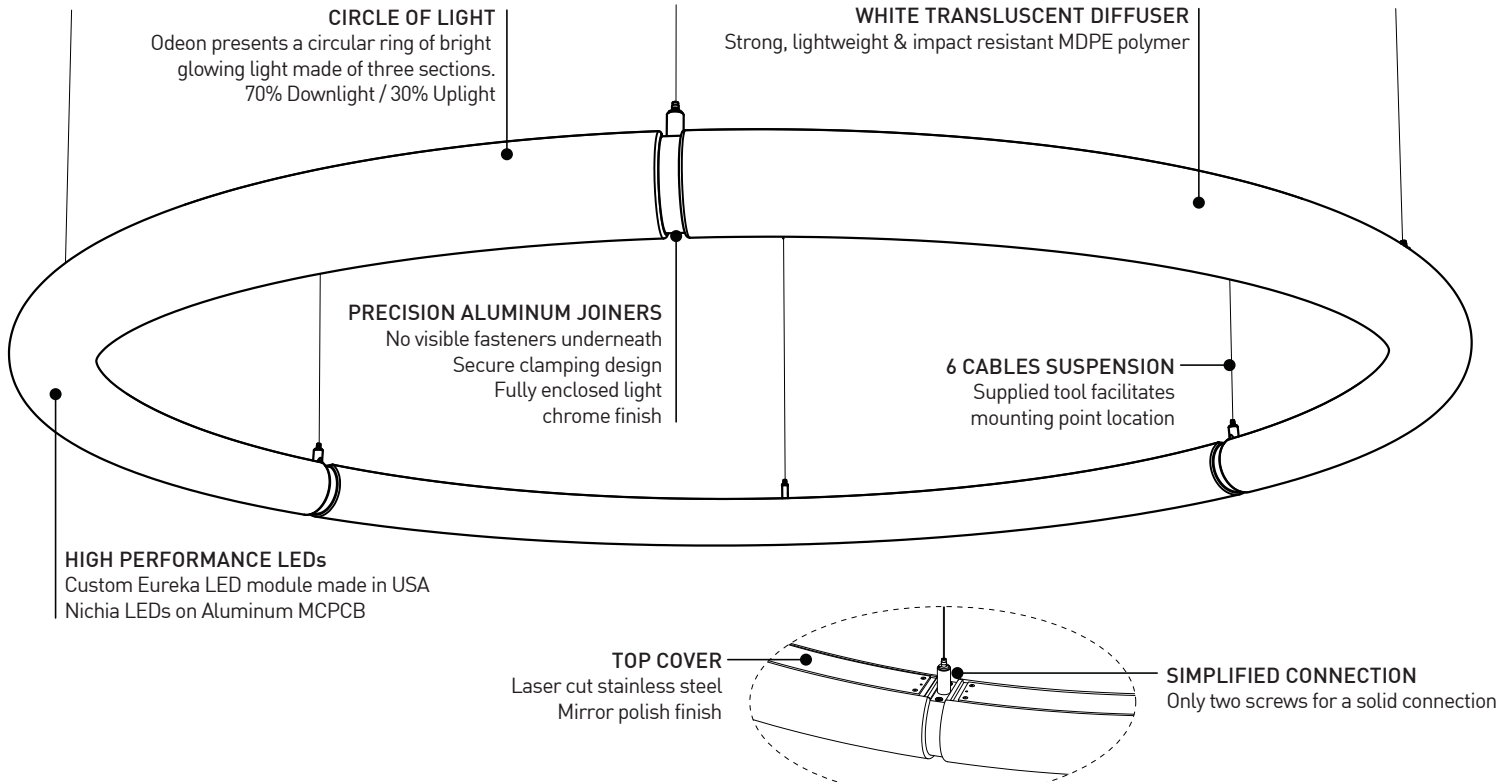


**2 SIZES**  
The use of different sizes allows for several arrangement possibilities of within your space

**CANOPY OPTIONS:**  
**STANDARD CANOPY**  
Odeon 80": Ø9.1" X 1.75" H  
Odeon 118": Ø11" X 2.75" H  
Mounting on a 4" standard j-box



**LOW PROFILE CANOPY**  
Odeon 80/118: Ø9.4" X 0.25" H  
Recessed drivers for discreet installation  
Mounts on Eureka box 3981D 6"x6"  
**sold and installed separately**  
Requires 6" clearance above ceiling



## CHARACTERISTICS

### 4805-80

### 4805-118


LIGHT SOURCE	432x Nichia LED's ± 414.3W	648x Nichia LED's ± 211.9W
ESTIMATED DELIVERED LUMENS	18502 lm	27900 lm
LED MODULE	UL Recognized - Designed for Eureka - Made in USA	
CRI	85 CRI (typical)	
STRUCTURE	Moulded MDPE diffuser (medium density polyethylene), Mirror polished Stainless steel & Aluminum	
LIGHT DISTRIBUTION	70% Direct/ 30% Indirect	
VOLTAGE	120V or 277V	120V or 277V
DRIVER (DIMMING)	Constant Current 1750mA 75W 120-277V DIM 0-10V	
LM-79	On request	
WARRANTY	5 years	
WEIGHT (PACKED)	30lbs (45lbs packed)	40lbs (55lbs packed)



225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com





**4805-80 | 4805-118**

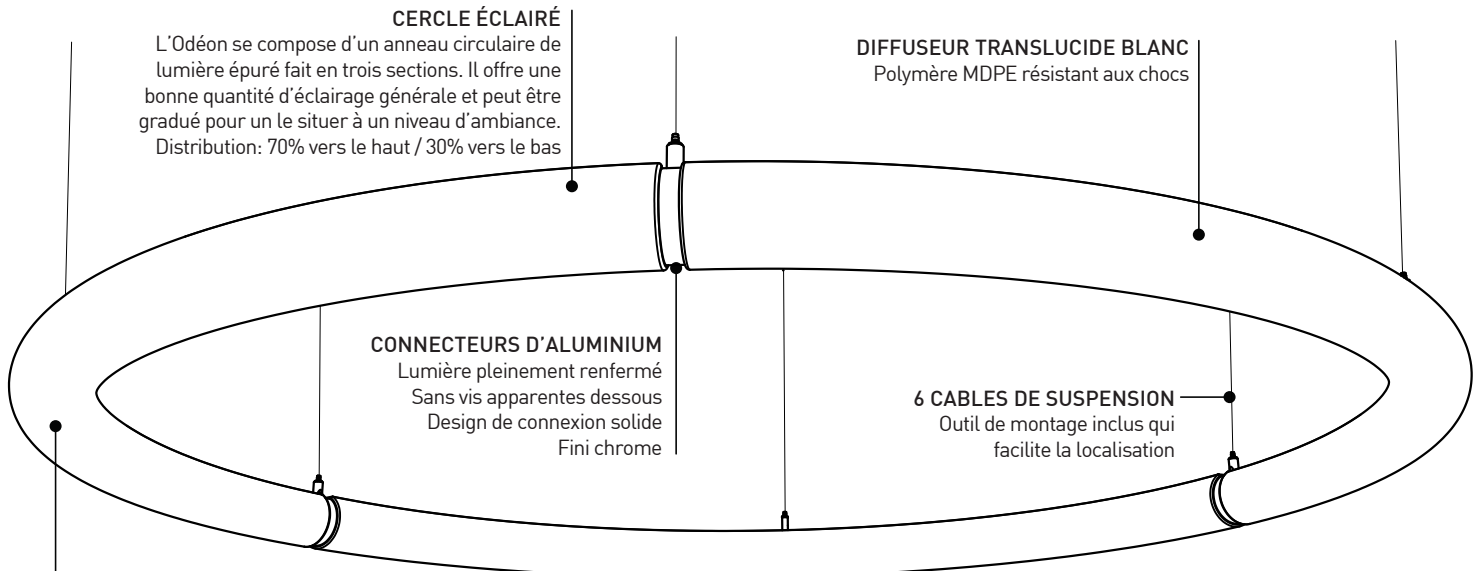

**COUVERT DU DESSUS**  
Acier inoxydable  
fini poli miroir


**CONNEXION SIMPLIFIÉE**  
Deux vis pour une connexion sécurisée

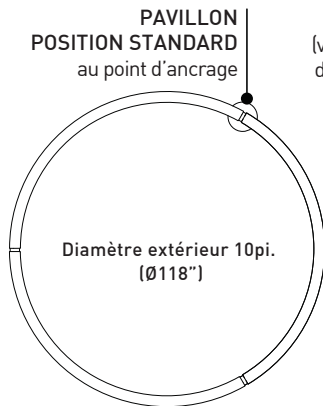


**2 GRANDEURS**  
L'agencement des deux grandeurs dans un espace permet de créer une composition originales

**OPTIONS DE PAVILLON:**

**PAVILLON STANDARD**  
Odeon 80": Ø9.1" X 1.75" H  
Odeon 118": Ø11" X 2.75" H  
S'installe sur une boîte de connexion standard



**PAVILLON MINCE (RDP)**  
Odeon 80/118: Ø9.4" X 0.25" H  
Pilote encastré pour une installation discrète  
S'installe sur: la boîte de jonction Eureka 3981D 6"x6"  
**Vendue & installé séparément avant le luminaire**  
Nécessite 6" de dégagement dans le plafond



**CHARACTERISTICS**

SOURCE LUMINEUSE  
LUMENS (LIVRÉS)  
MODULE DEL  
IRC

**4805-80**

432x DELs Nichia ± 414.3W  
18502 lm  
Reconnu UL - exclusif d'Eureka - Fabriqué aux États-Unis  
85 IRC (typique)

**4805-118**

648x DELs Nichia LED's ± 211.9W  
27900 lm

STRUCTURE  
DISTRIBUTION LUMINEUSE

Diffuseur moulé MDPE (polyéthylène densité moyenne), Acier inoxydable poli mirror, Aluminium  
70% Directe/ 30% Indirecte

VOLTAGE

120V ou 277V | 120V ou 277V

PILOTE

Constant Courant 1750mA 75W 120-277V DIM 0-10V

LM-79

On request

GARANTIE

5 ans

POIDS (EMBALLÉ)

30lb (45lb) | 40lb (55lb)



225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com



**4805-80 | 4805-118**