

FLARE 74040


PROJECT PROJET

SPEC TYPE


NOTES




74040-24




74040-36



74040-48



74040-96



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE 74040

74040 FLARE

LUMINAIRE LENGTH LONGUEUR DU LUMINAIRE

24 24"
36 36"
48 48"
96 96"

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

74040-24		74040-48	
F.T5.14	14W, T5	F.T5.28	28W, T5
F.T5.24	24W, T5 HO	F.T5.54	54W, T5 HO
74040-36		74040-96	
F.T5.21	21W, T5	2XF.T5.28	28W X 2, T5
F.T5.39	39W, T5 HO	2XF.T5.54	54W X 2, T5 HO

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT
347V* 347 VOLT

*ONLY AVAILABLE WITH F.T5.54 & 2XF.T5.54 (NON-DIMMING BALLAST)

DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH F.T5.54 AND 2XF.T5.54 ONLY

DM1 ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST*

AVAILABLE WITH F.T5.14, F.T5.21, F.T5.28, 2XF.T5.28 F.T.54 AND 2XF.T5.54

DM7 ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST*

AVAILABLE WITH ALL T5 LIGHT SOURCES

D3D LUTRON HI-LUME 3D ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)

D33 LUTRON HI-LUME 3D ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)

CABLE CABLE

AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CABLE

60 60" AIRCRAFT CABLE (STD LENGTH)
** CUSTOM AIRCRAFT CABLE LENGTH (MAX 180") (PLEASE SPECIFY)
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR


FRO FROSTED

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



BIM **DIM** **IES**

DESIGN: Slim and modern rectangular profile available in several lengths.
INSTALLATION: Easy to install, adjust and level aircraft cable mounting.
LIGHT SOURCE: Highly efficient fluorescent T5 and T5 HO light sources. Dimming available.
STRUCTURE: Structure in extruded aluminum & die-stamped steel. Metallic gray injection moulded plastic end caps.
DIFFUSER: Machined & frosted acrylic housing with snap-fit, extruded micro-prism acrylic lens.
CERTIFIED: c-UL-us

CONCEPTION: Profil rectangulaire mince et contemporain offert en quatre longueurs.
INSTALLATION: Facile à installer, ajuster et à équilibrer sur câble d'acier.
SOURCE LUMINEUSE: T5 et T5HO à haute performance; ballasts à gradation disponibles.
STRUCTURE: Structure en aluminium extrudé et en acier embouti. Embouts injectés en plastique.
DIFFUSEUR: Boîtier en acrylique usiné et givré avec emboîtement-pression, lentille extrudée en acrylique avec micro-prismes.
CERTIFIÉ: c-UL-us

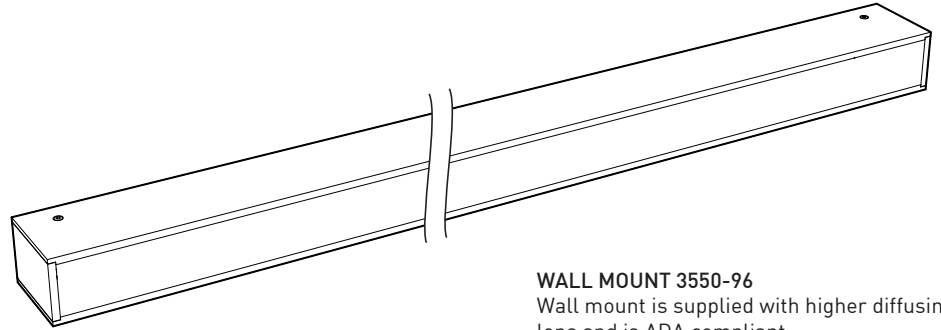

WALL MOUNT 3550-96
Wall mount is supplied with higher diffusing lens and is ADA compliant

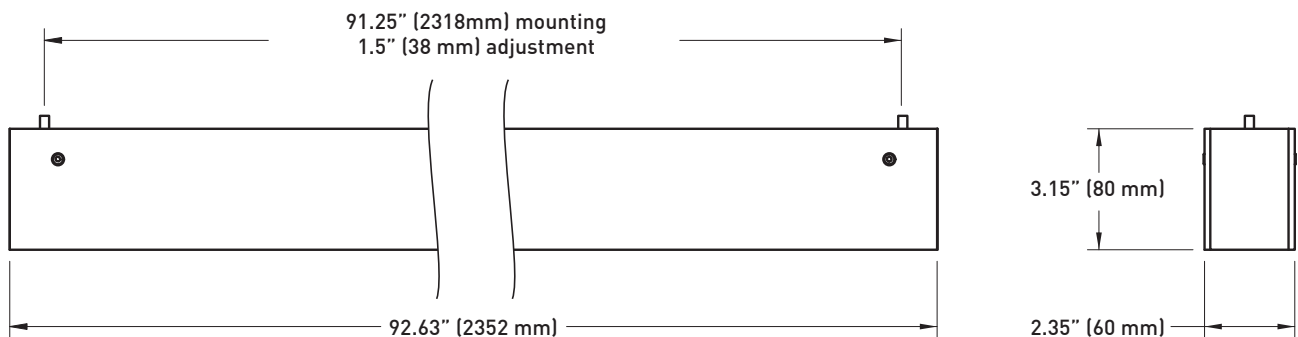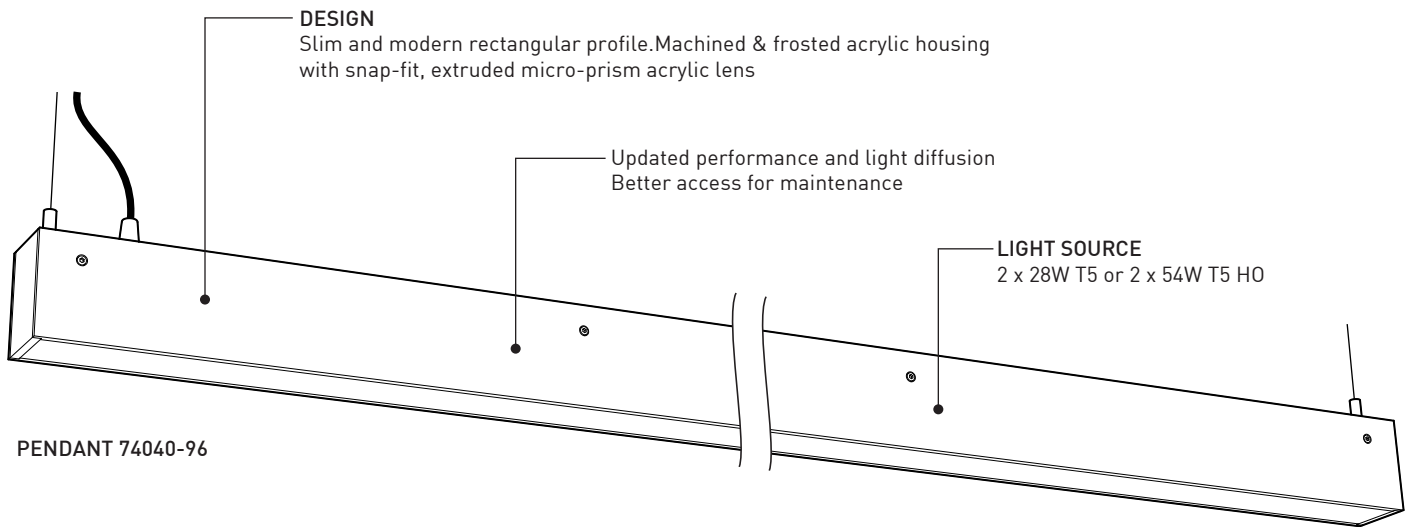


SPECIFICATIONS

FLUORESCENT

LIGHT SOURCE	2 x 28W T5 or 2 x 54W T5 HO
BALLAST	Advance Optanium or equivalent: Programmed Start-EOL (End-of-Life) protection
DIMMING	Advance Mark 10 2 x 54W T5HO (ONLY)
EMERGENCY	IOTA ISL-28 (1 Lamp 28w-500 Lm/90 min) : ISL-54 (1 Lamp 54w-825 Lm/90 min)
VOLTAGE	120V , 277V or 347V (not available with dimming)
STRUCTURE	Extruded aluminum & die-stamped steel
END CAP	Injection moulded plastic
DIFFUSER	Machined & frosted acrylic housing with snap-fit, extruded micro-prism acrylic lens
WARRANTY	1 year





3550-96
74040-96

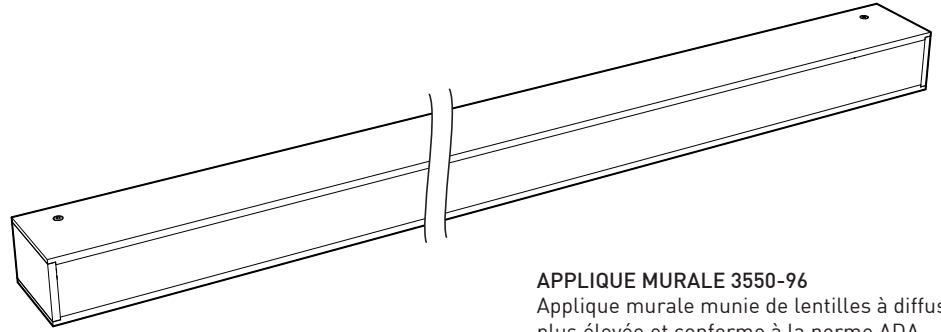

APPLIQUE MURALE 3550-96

Applique murale munie de lentilles à diffusion plus élevée et conforme à la norme ADA

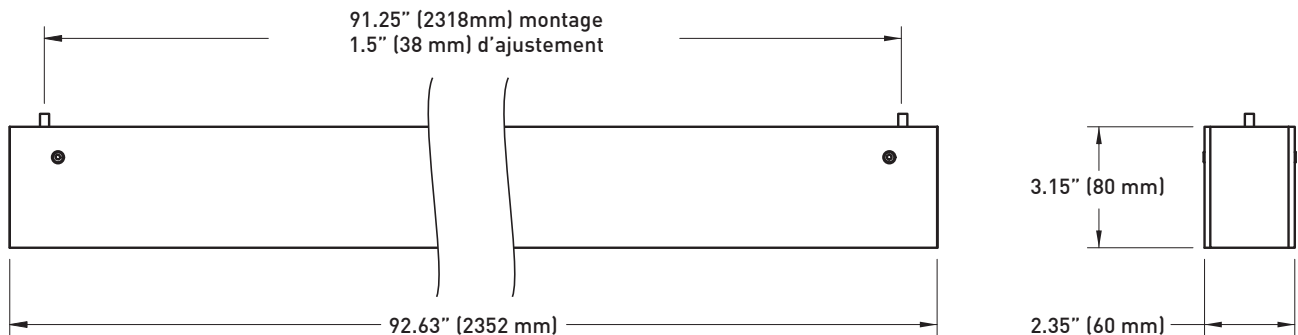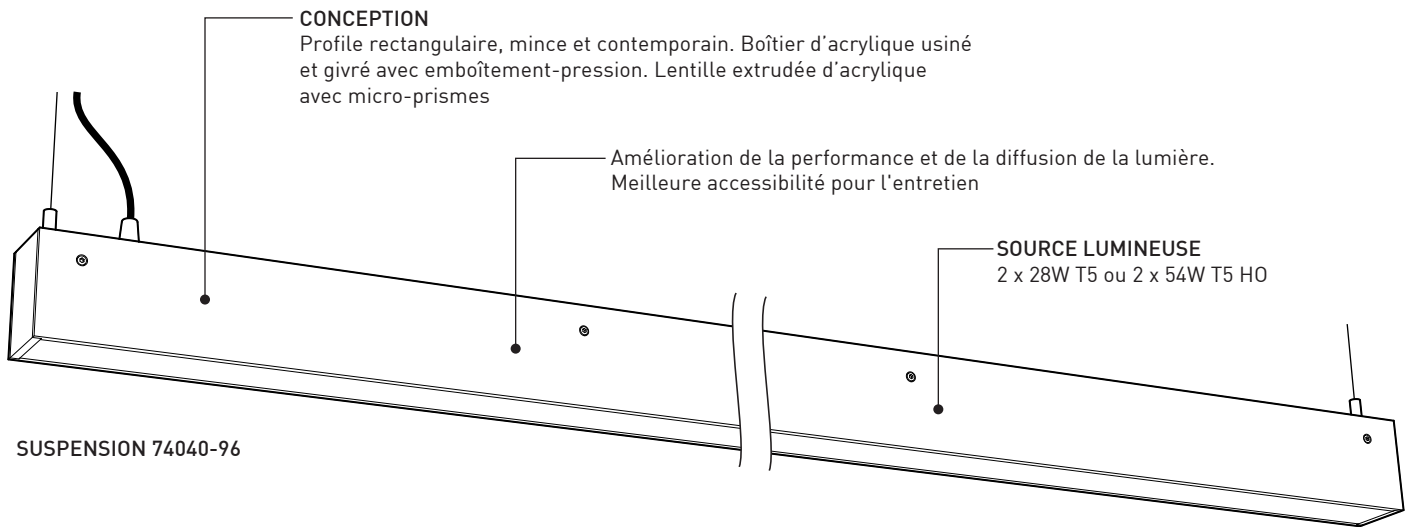

SPECIFICATIONS

SOURCE LUMINEUSE

BALLAST

GRADATION

URGENCE

VOLTAGE

STRUCTURE

EMBOUT

DIFFUSEUR

GARANTIE

FLUORESCENT

2 x 28W T5 ou 2 x 54W T5 HO

Advance Optanium ou équivalent: Programmed Start-EOL (End-of-Life) protection

Advance Mark 10 2 x 54w T5HO (SEULEMENT)

IOTA ISL-28 (1 Lamp 28w-500 Lm/90 min) : ISL-54 (1 Lamp 54w-825 Lm/90 min)

120V , 277V ou 347V (pas disponible avec gradation)

Acier extrudé et acier embouti

Embout injectés en plastique

Boîtier d'acrylique usiné et givré avec emboîtement-pression, lentille extrudée d'acrylique avec micro-prismes

1 an