

DUSK 74132


| |
|----------------|
| PROJECT PROJÉT |
| SPEC TYPE |
| NOTES |



OPTIONS



WH M G CHR* SAA*

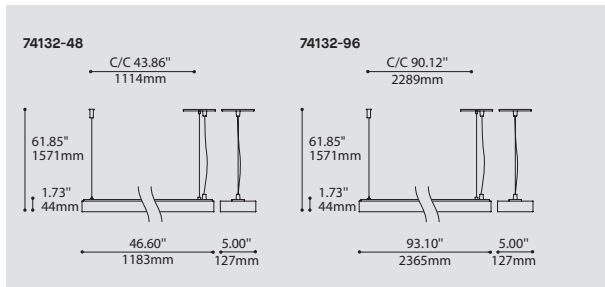

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE

74132 DUSK

LUMINAIRE LENGTH LONGUEUR DU LUMINAIRE

48 48"
96 96"

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

48" MODELS

2XF.T5.28 28W X 2, T5
2XF.T5.54 54W X 2, T5 HO
LED REGULAR OUTPUT
LED.HO HIGH OUTPUT

96" MODELS

4XF.T5.28 28W X 4, T5
4XF.T5.54 54W X 4, T5 HO
LED REGULAR OUTPUT
LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY

30 3000K
35 3500K
40 4000K

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT
347V* 347 VOLT

*ONLY AVAILABLE WITH 2XF.T5.54 AND 4XF.T5.54 (NON-DIMMING BALLAST)

DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH 2XF.T5.54 AND 4XF.T5.54 ONLY

DM1 ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST

AVAILABLE WITH ALL T5 LIGHT SOURCES

DM7 ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST
D3D LUTRON HI-LUME 3D ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)
D33 LUTRON HI-LUME 3D ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)

AVAILABLE WITH ALL LED LIGHT SOURCES

DV 0-10V DIMMING (120-277V)
DP PHASE DIMMING (120V ONLY)

EMERGENCY BATTERY BATTERIE D'URGENCE

AVAILABLE WITH ALL T5 LIGHT SOURCES, 120V OR 277V ONLY

NOT AVAILABLE WITH A DIMMING BALLAST

EM EMERGENCY BATTERY

CABLE CABLE

AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CABLE

60 60" AIRCRAFT CABLE (STD LENGTH)
** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

STRUCTURE FINISH FINI STRUCTURE

WH WHITE
M G METALLIC GRAY (FOR 74132 ONLY)
CHR* CHROME (FOR 48" ONLY)
SAA* SATIN ALUMINUM ANODIZED
*LONGER LEAD TIME



END CAP FINISH FINI EMBOUT

CHR CHROME

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT





DESIGN: An architectural staple with a flash of chrome that offers soft indirect light in 2 lengths.
INSTALLATION: Easy to install, adjust and level aircraft cable mounting.
LIGHT SOURCE: LED and T5 HO light sources. Dimming and EM available.
STRUCTURE: Structure in extruded aluminum & die-stamped steel. Polyester powder housing and chrome end caps.
REFLECTOR: Highly reflective powder coated die-formed steel reflectors.
CERTIFIED: c-CSA-us, c-UL-us

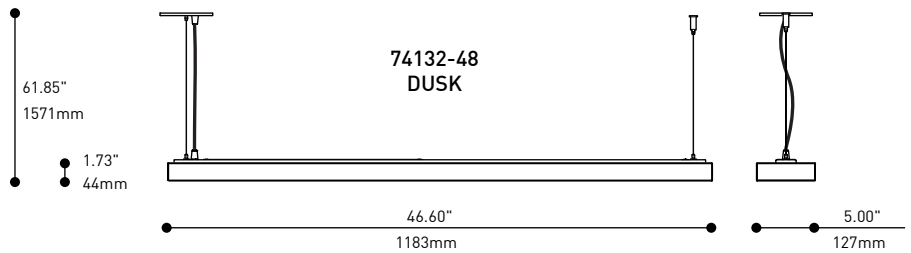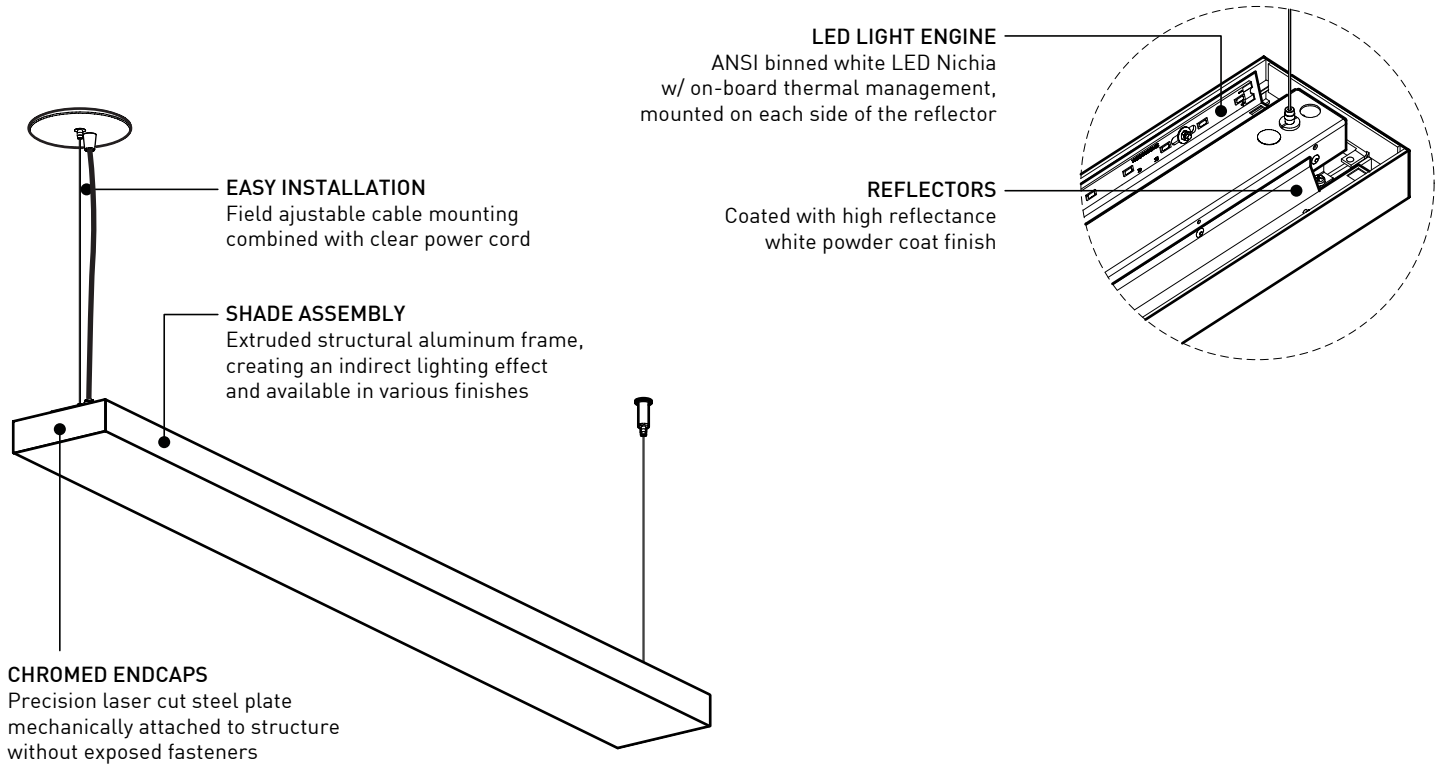

SPECIFICATIONS

| | LED | FLUORESCENT |
|--------------------|---|---|
| LIGHT SOURCE | 90 x NICHIA LEDS | 2 x 28w T5 or 2 x 54w T5HO |
| MODULE | UL recognized - made in USA | |
| LUMENS (DELIVERED) | 3292 lm (REG) or 4799 lm (HO) | |
| SYSTEM WATTAGE | 33W (REG), 51W (HO) | |
| CCT / CRI | 80 CRI (typical) | |
| ROHS | Compliant | |
| THERMAL MANAGEMENT | Light Engine w/ on-board Thermal Management | |
| LIGHT DISTRIBUTION | Indirect - 120° Beam Angle | Indirect |
| VOLTAGE | 120V or 277V | 120V-277V, 347V |
| DIMMING | Phase (DP) or 0-10V (DV) Dimming | Advance Mark 7 (T5), Mark 10 (T5HO) or Lutron |
| EMERGENCY | N/A | IOTA ISL-54 (1 Lamp 28w/54w) |
| LM-79 / L70 | On request / Estimated 50 000 hrs | |
| HOUSING | Formed Cold Rolled steel finished in white polyester powder coat (0.048" nominal thickness) | |
| SHADE | Extruded aluminum frame available in White powder coat painted, in Metallic Gray painted, in Chrome plated or in Satin Aluminum | |
| MOUNTING | Suspension round canopy in white polyester powder coat | |
| ENDCAPS | Precision laser cutting and Formed Cold rolled Steel (0.048" nominal thickness) w/ Chrome Plated Finish | |
| WARRANTY | 5 years | 1 year |

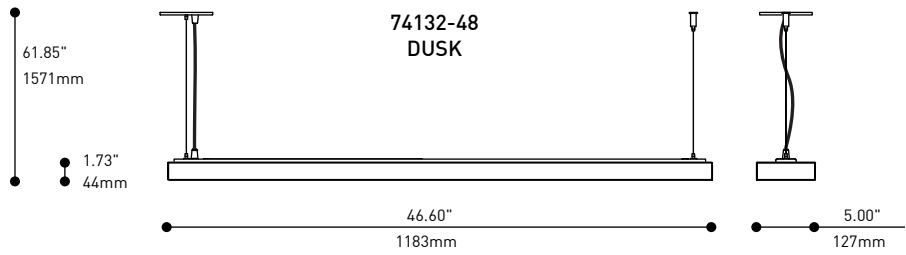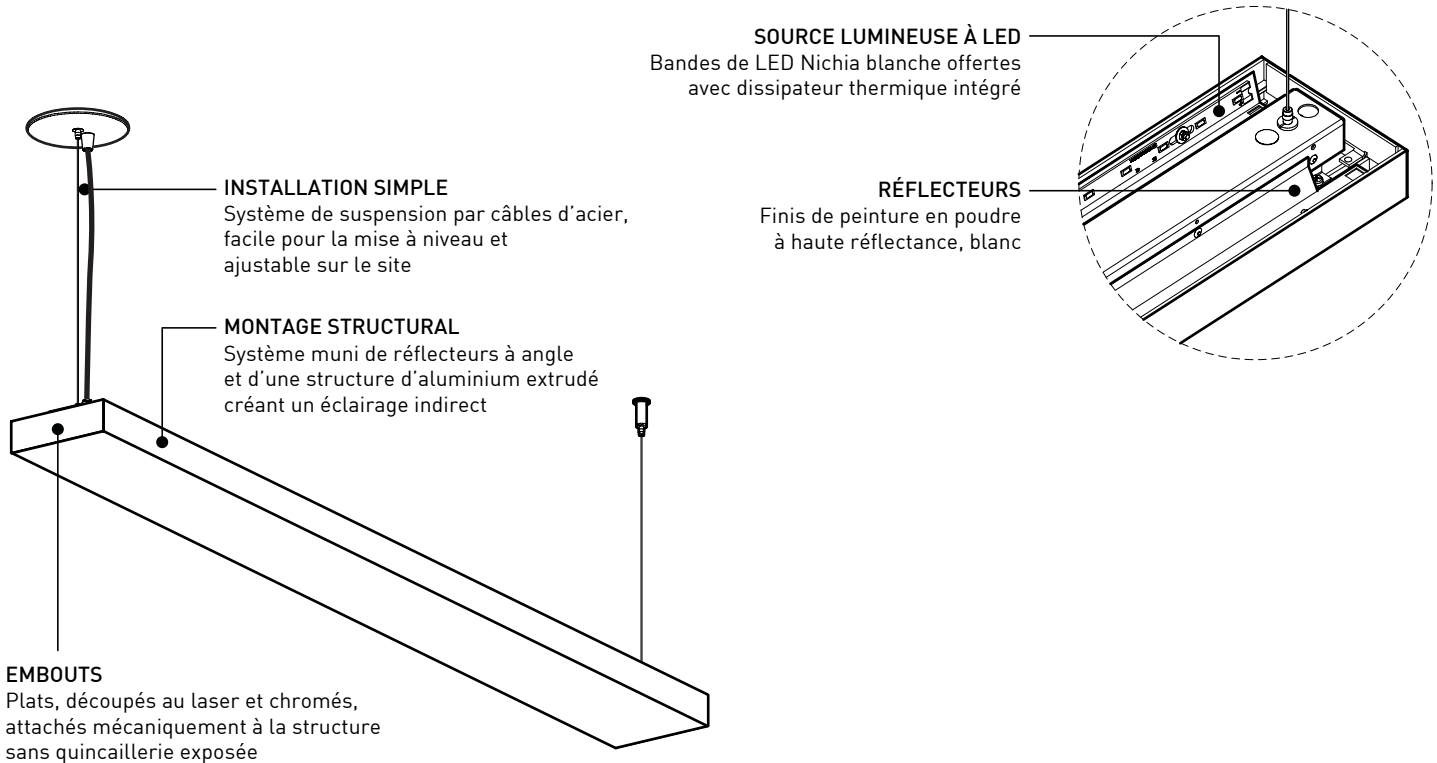

SPÉCIFICATIONS

SOURCE LUMINEUSE

MODULE

LUMENS (LIVRÉS)

WATTAGE DU SYSTEM

CCT / CRI

ROHS

GESTION THERMIQUE

DISTRIBUTION LUMINEUSE

VOLTAGE

GRADATION

BATTERIE D'URGENCE

LM-79 / L70

RÉFLECTEURS

STRUCTURE

MONTAGE

EMBOUTS

GARANTIE

LED

90 x NICHIA LEDS

Reconnu UL - Fabriqué aux États-Unis

3292 lm (REG) ou 4799 lm (HO)

33W (REG), 51W (HO)

80 CRI (typique)

Conforme

Sources lumineuses avec autocontrôle de température

Indirecte - Diffusée à 120°

120V ou 277V

Gradation phase (DP) ou 0-10V (DV)

Non disponible

Sur demande / 50 000 hrs estimées

Acier découpés, pliés (0.048" épaisseur nominale) / finis de peinture électrostatique à base de Polyester blanche

Fabriquée en aluminium extrudé disponible en Blanc, en Gris métallique, en Chrome ou en Satin Aluminium

Pavillon rond fini de peinture électrostatique à base de Polyester blanche

Acier découpés au laser, pliés, soudés (0.048" épaisseur nominale) et chromés

5 ans

FLUORESCENTE

2 x 28w T5 ou 2 x 54w T5HO

Indirecte

120V-277V, 347V

Advance Mark 7 (T5), Mark 10 (T5HO) ou Lutron

IOTA ISL-54 (1 Lampe 28w/54w)

1 an