


Avenue® 6


FLUORESCENT FOR TECHZONE™ CEILING SYSTEMS




FOCAL POINT®

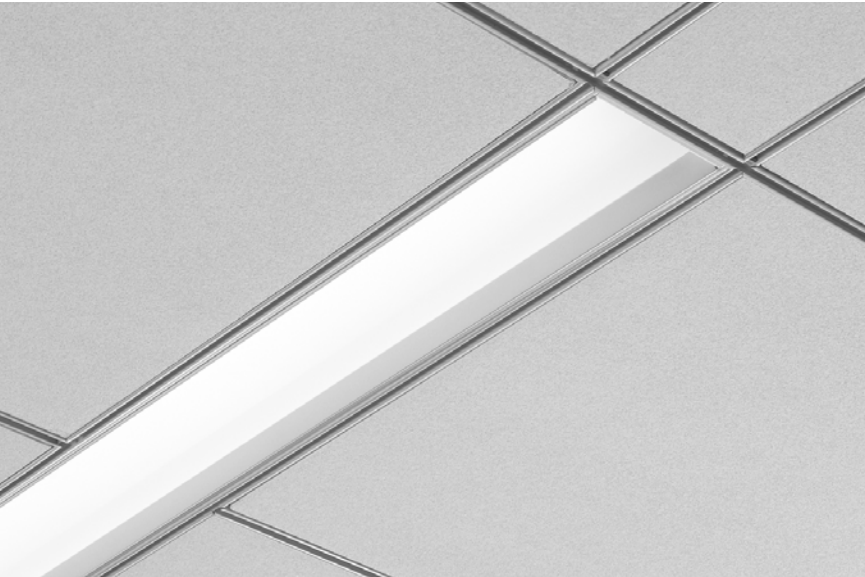


solid regress trim



flush lens



parabolic louver




microglow™ lens




mr16 companion




DIMENSIONAL DATA




regressed trim



flush lens



parabolic louver



FEATURES


Avenue® 6 integrates with TechZone™ Ceiling Systems for a clean, unobtrusive aesthetic.

1 and 2 lamp fluorescent T5/T5HO or T8.

Shielding options include corrugated or solid regressed trim, flush lens or parabolic louver.

Avenue® 6 provides an integrated lighting solution that complements the ceiling and entire space while providing comfortable general illumination.

PERFORMANCE




1-LampT5HO
67% Efficient
1392 cd @ 125°

PRODUCT OVERVIEW

Lumen Output: 1525-8862lm
Wattage: 33-180W
Lamping: T5, T5HO, T8

Visit focalpointlights.com for complete photometric data.

MOUNTING INFORMATION

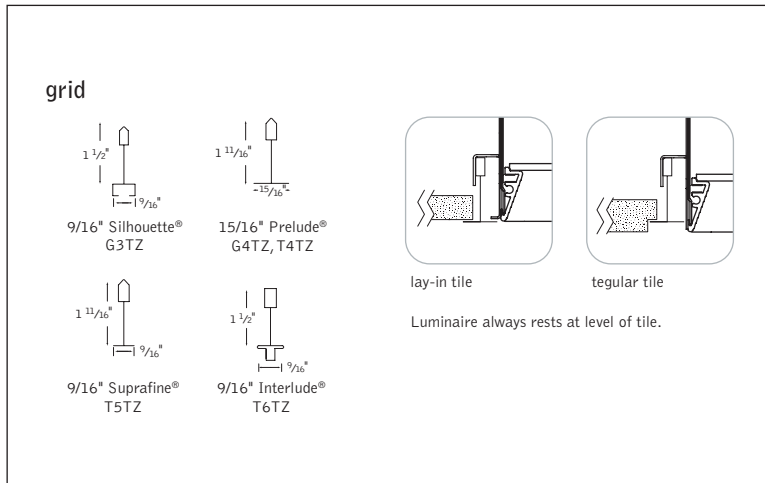

SPECIFICATIONS

Construction

One-piece 20 Ga. steel housing. Corrugated and solid regress trim constructed of extruded aluminum finished in Matte Satin White. 20 Ga. steel, universal flange rail finished in Matte Satin White. Positional brackets supplied as standard. 4' unit weight: 15 lbs., 5' unit weight: 22 lbs.

Optic

22 Ga. steel reflectors finished in High Reflectance White powder coat. Acrylic lens diffuser .118" thick, frosted clear. Parabolic louver: .75" H x 1.5" frequency fabricated of low iridescent, semi-specular premium grade aluminum.

Electrical

Luminaires are individually wired for specified circuits. Thru-wiring not available. Electronic ballasts are thermally protected and have a Class "P" rating. Consult factory for dimming specifications and availability.

Labels

UL and cUL listed.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

ORDERING

Luminaire Series	FAV6	<hr/>
Avenue 6 TechZone	FAV6	
Shielding		<hr/>
Corrugated Regressed Trim Frst.Lns	CR	
Solid Regressed Trim Frosted Lens	SR	
Flush Frosted Lens	FL	
Parabolic Louver	PL	
(T5/T5HO only)		
White Painted Parabolic Louver	PW	
(T5/T5HO only)		
Corrugated Regressed Trim with MicroGlow™ Lens	CRM	
Solid Regressed Trim with MicroGlow Lens	SRM	
Flush MicroGlow Lens	FLM	
Lamping		<hr/>
One Lamp T5	1T5	
One Lamp T5HO	1T5HO	
One Lamp T8	1T8	
Two Lamp T5	2T5	
Two Lamp T5HO	2T5HO	
Two Lamp T8	2T8	
Circuits		<hr/>
Single Circuit	1C	
Dual Circuit	2C	
Voltage		<hr/>
120 Volt	120	
277 Volt	277	
347 Volt	347	
(Consult factory for dimming options)		
UNV Volt	UNV	
(Cannot be specified with T5HO dimming or EM option)		
Ballast		<hr/>
(Consult factory for 5' dimming options)		
Electronic Program Start <10% THD	S	
0-10V	D7	
Lutron 1% 3-wire	DH	
Lutron 1% H-Series	DK	
TechZone™ Ceiling System Configurations		<hr/>
9/16" Silhouette Slot-tee Tegular	G3TZ	
15/16" Prelude Lay-in	G4TZ	
15/16" Prelude Tegular	T4TZ	
9/16" Suprafine Tegular	T5TZ	
9/16" Interlude Node Tegular	T6TZ	
Factory Options		<hr/>
Chicago Plenum	CP	
Emergency Battery Pack*	EM	
(4' Luminaires Only)		
HLR/GLR Fuse	FU	
Include 3000K Lamp*	L830	
Include 3500K Lamp*	L835	
Include 4100K Lamp*	L841	
Finish	WH	<hr/>
Matte White Housing	WH	
Luminaire Length		<hr/>
4' Nominal Housing	4'	
5' Nominal Housing	5'	
(Consult factory for 5' dimming)		