






# **DIMENSIONAL DATA**

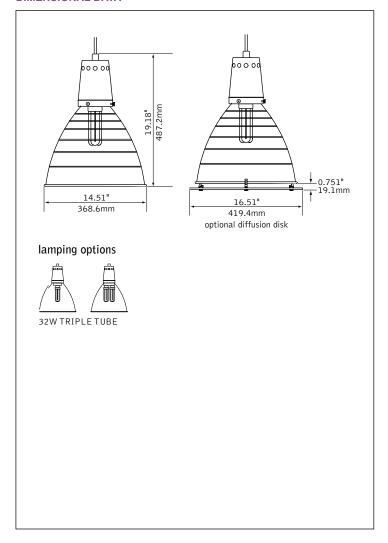


# **FEATURES**

Pendant mount decorative compact fluorescent luminaire.

Housing, reflector and canopy are spun with high quality aluminum.

Ideally suited for retail, hospitality, lobbies, corridors, open ceiling areas and other specialty applications.

# **PERFORMANCE**



| fixture: | project: |
|----------|----------|
|          |          |

# **SPECIFICATIONS**

### Construction

Housing, reflector and canopy are each one-piece precision-spun 14Ga. aluminum. Housing: 7.62"H x 5.25" Dia. Reflector: 12.35"H x 14.51" Dia. aperture with grooved cylindrical pattern. Canopy: 1.32"H x 4.52" Dia. stepped design with #8-32 recessed set screw. Weight: 10 lbs.

# Optic

14Ga. anodized aluminum reflector with diffuse satin matte surface for lamp image reduction. Optional frosted green or white acrylic diffusion disk with polished edges are retained by aluminum fasteners and (3) #8-32 thumb screws.

### Electrical

Luminaires are pre-wired for single circuit with thermally protected Class "P" electronic ballast. Factory installed decorative metal braided power cord is included. White SJT power cord supplied for 347V. 144" cord is provided on all luminaires and may be cut to length in field. One or two lamp triple tube compact fluorescent, 4-pin, 32W (GX24q-4).

# Labels

UL listed.

### Finish

Luminaire housing, reflector and canopy are clear anodized with polished satin finish. Reflector interior has matte diffuse finish.

# **ORDERING**

| OHDEHING                                   |              |      |
|--|--------------|------|
| Luminaire Series                           |              | FGR  |
| Groove                                     | FGR          |      |
| Profile                                    |              | E    |
| Profile                                    | E            |      |
| Lamp Quantity                              |              |      |
| One Lamp                                   | 1            |      |
| Two Lamp                                   | 2            |      |
| Lamp Type                                  |              | 32TT |
| 32w. Triple Tube, GX24q-3                  | 32TT         |      |
| Ballast                                    |              | S    |
| Electronic <15% THD                        | S            |      |
| Voltage                                    |              |      |
| 120 Volt                                   | 120          |      |
| 277 Volt                                   | 277          |      |
| 347 Volt                                   | 347          |      |
| 120/277 UNV                                | UNV          |      |
| Suspension                                 |              | C144 |
| Cable, Straight Feed                       | C144         |      |
| (144" cable, cut in field)                 |              |      |
| Factory Options                            |              |      |
| Frosted Green Diffusion Disk               | GD           |      |
| Frosted White Diffusion Disk               | WD           |      |
| Include 3000K Lamp*                        | L830         |      |
| Include 3500K Lamp*<br>Include 4100K Lamp* | L835<br>L841 |      |
| •  | L041         |      |
| Finish                                     | NIA          | NA   |
| Natural Anodized                           | NA           |      |