




flush lens



pop-down lens



wall to ceiling companion




suspended companion



wall mount companion

DIMENSIONAL DATA

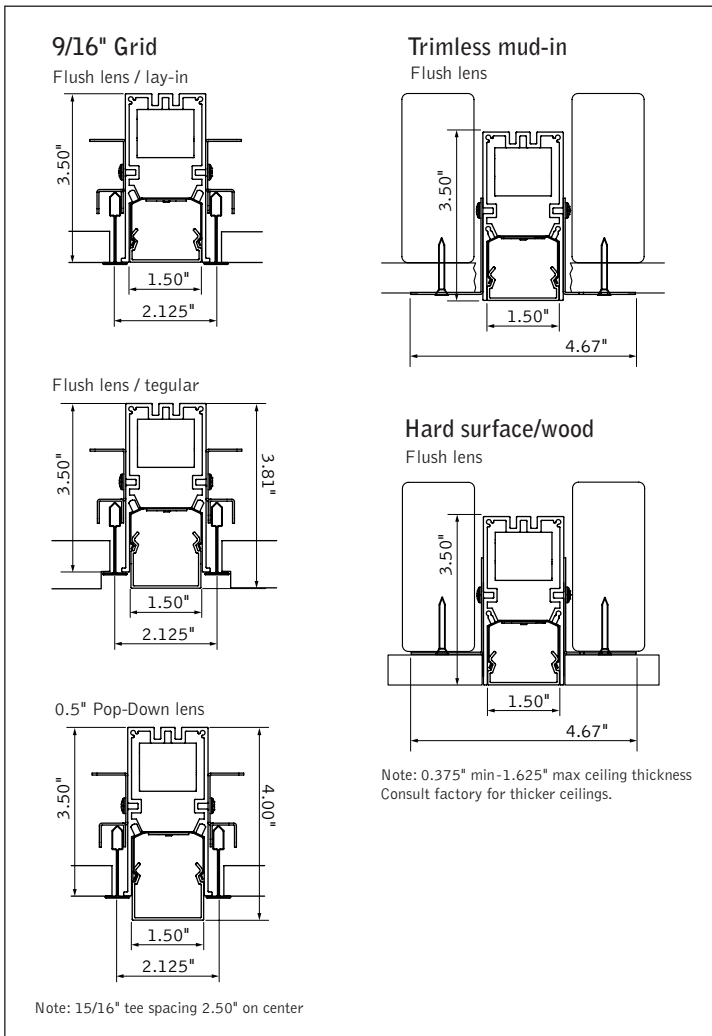

FEATURES

Narrow extruded aluminum 1.5" recessed linear slot LED.


Individual units and continuous runs in 1" increments.

Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.

LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Choice of output levels to meet a wide variety of application needs.

PERFORMANCE




PRODUCT OVERVIEW

Lumen Output:	500-2500lm
Wattage:	6-24W
LPW:	75-106
SDCM:	3

4' Flush Lens
625 Lumens per foot
Delivered Lumens: 2500lm
Total System Watts: 24W

Photometric performance is measured in accordance with IESNA LM-79.
Visit focalpointlights.com for complete photometric data.

DETAILS

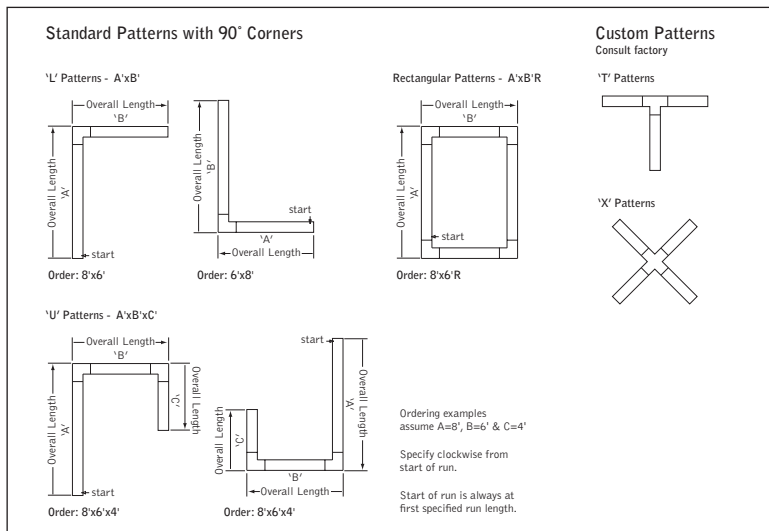

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 3000K, 3500K or 4000K with both 80 and 90 CRI options. LED modules and drivers are replaceable from below. Color accuracy <3 SDCM.

Construction

One piece extruded aluminum housing. 20 Ga. steel end caps. Housing for new construction applications. XFW acceptable for use with wood, consult factory for Type IC availability. 8' unit weight: 15lbs.

Optic

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat. Extruded acrylic lens .07" thick with frosted finish, up to 8' continuous.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9.

Emergency Battery

Emergency output - 10 watts for 90 minutes. See EM/EC Guide for default locations and ordering details.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 at >61,000 hours Calculated: L70 at 470,000 hours
 L90 at >61,000 hours L90 at 115,000 hours

Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

4' PERFORMANCE CHART

Shielding	Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
Flush Lens	125LF	500	6	75
	250LF	1000	10	98
	375LF	1500	15	104
	500LF	2000	19	106
	625LF	2500	24	104

Based on 3500k, 4' lengths. Lumen Multipliers: Pop-Down Lens = 1.01, 90 CRI = 0.87
 Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

Focal Point LLC reserves the right to change specifications for product improvement without notification.

ORDERING

Luminaire Series		FSM1
See 1 LED		FSM1
Shielding		
Flush Lens		FL
0.5" Pop-Down Lens		PD05
Lumen Output		
125 Lumens per foot (4' minimum length. Consult factory for Lutron, DALI)		125LF
250 Lumens per foot (3' minimum length)		250LF
375 Lumens per foot		375LF
500 Lumens per foot		500LF
625 Lumens per foot		625LF
Color Temperature		
3000K, 80CRI		30K
3000K, 90CRI		930K
3500K, 80CRI		35K
3500K, 90CRI		935K
4000K, 80CRI		40K
4000K, 90CRI		940K
Circuit		1C
Single Circuit		1C
Voltage		
120/277 UNV Volt		UNV
347 Volt (LD1 driver only)		347
Control System & Dimming Level		
0-10V - 10% Dimming		LD1
0-10V - 1% Dimming		L11
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming		LH1
Lutron 5-Series EcoSystem (LDE5) - 5% Dimming		LU5
DALI 1% Dimming		D11
Ceiling Configuration		
Std. 15/16" Lay-in		G1
Std. 15/16" Tegular		T1
Std. 9/16" Lay-in		G2
Std. 9/16" Tegular		T2
9/16" Slot-tee Tegular		G3
Tall 15/16" Lay-in		G4
Tall 15/16" Tegular		T4
Tall 9/16" Lay-in		G5
Tall 9/16" Tegular		T5
Node 9/16" Tegular		T6
Mud-in Trimless		XFF
Non-Drywall Hard Surface		XFN
Hard Surface, Wood		XFW
Factory Options		
Chicago Plenum		CP
Emergency Circuit		_EC
Emergency Battery Pack (4' minimum length. See EM/EC Guide for default locations and ordering details.)		_EM
6' New York City Flex Whip (120V)		FNY1
6' New York City Flex Whip (277V)		FNY2
6' Flex Whip		FW
Finish		WH
Matte White Housing		WH
Luminaire Length		ft in
Specify luminaire/row length in 1" increments (2' minimum. Leave blank for patterns. Smaller increments available, consult factory.)		_ft _in
Pattern Options (3' minimum length)		
'L' pattern		A' x B'
'U' pattern		A' x B' x C'
Rectangular pattern (Consult factory for other pattern options)		A' x B' R

For more information visit focalpointlights.com/reference or consult factory.

Seem® EM/EC Guide

FSM1, FSM1S, FSM1W, FSM2L-FL, FSM2L-FL2, FSM2LS, FSM2LW, FSM4L-FL/SR/SRXP, FSM4L-FL2, FSM4LS, FSM4LW, FSM4LP, FSM6L-FL/SR/SRXP*



DEFAULT LOCATIONS

- By default, EM/EC are located at the end (last section) of a run when one EM/EC location is specified, and at the start and end when two locations are specified.
- EM/EC illuminate entire sections from 4' to 8' in length.
- Feed location is at start of run. All EC's are fed individually at the end of each fixture segment.

1 EM/EC – END OF RUN



Ordering example: FSM4L-FL... **1EM-WH-36ft**

2 EM/EC – START & END OF RUN




Ordering example: FSM4L-FL... **2EM-WH-36ft**

ALTERNATE LOCATIONS AND QUANTITIES

- If more than two locations are required, or specific locations within run need to be specified, indicate in the ordering string.

ONE EM IN 3RD SECTION



Ordering example: FSM4L-FL... **1EM-3-WH-40ft**

THREE EM IN 1ST, 3RD AND 6TH SECTIONS



Ordering example: FSM4L-FL... **3EM-1-3-6-WH-48ft**

CUSTOM LENGTHS

- If partial illumination of emergency section is required, indicate quantity in ordering string and partial illumination in Order Notes. Drawing required.
- Longer lead times may apply.

Run length (ft)	Housing Configuration Section Lengths
9	5 + 4
10	6 + 4
11	7 + 4
12	8 + 4
13	8 + 5
14	8 + 6
15	8 + 7
16	8 + 8
17	8 + 5 + 4
18	8 + 6 + 4
19	8 + 7 + 4
20	8 + 8 + 4
21	8 + 8 + 5
22	8 + 8 + 6
23	8 + 8 + 7
24	8 + 8 + 8
25	8 + 8 + 5 + 4
26	8 + 8 + 6 + 4
27	8 + 8 + 7 + 4

Run length (ft)	Housing Configuration Section Lengths
28	8 + 8 + 8 + 4
29	8 + 8 + 8 + 5
30	8 + 8 + 8 + 6
31	8 + 8 + 8 + 7
32	8 + 8 + 8 + 8
33	8 + 8 + 8 + 5 + 4
34	8 + 8 + 8 + 6 + 4
35	8 + 8 + 8 + 7 + 4
36	8 + 8 + 8 + 8 + 4
37	8 + 8 + 8 + 8 + 5
38	8 + 8 + 8 + 8 + 6
39	8 + 8 + 8 + 8 + 7
40	8 + 8 + 8 + 8 + 8
41	8 + 8 + 8 + 8 + 5 + 4
42	8 + 8 + 8 + 8 + 6 + 4
43	8 + 8 + 8 + 8 + 7 + 4
44	8 + 8 + 8 + 8 + 8 + 4
45	8 + 8 + 8 + 8 + 8 + 5
46	8 + 8 + 8 + 8 + 8 + 6
47	8 + 8 + 8 + 8 + 8 + 7
48	8 + 8 + 8 + 8 + 8 + 8

Standard run configurations, consult factory for custom configurations.

*Recessed and suspended only. Does not include direct/indirect, pop-down lens or asymmetric options.