

Seem® 4-LP

LED



flush lens



regress lens

SEEM 4 FAMILY COMPANIONS




drywall ceiling



corners & patterns



perimeter




suspended



wall mount

DIMENSIONAL DATA

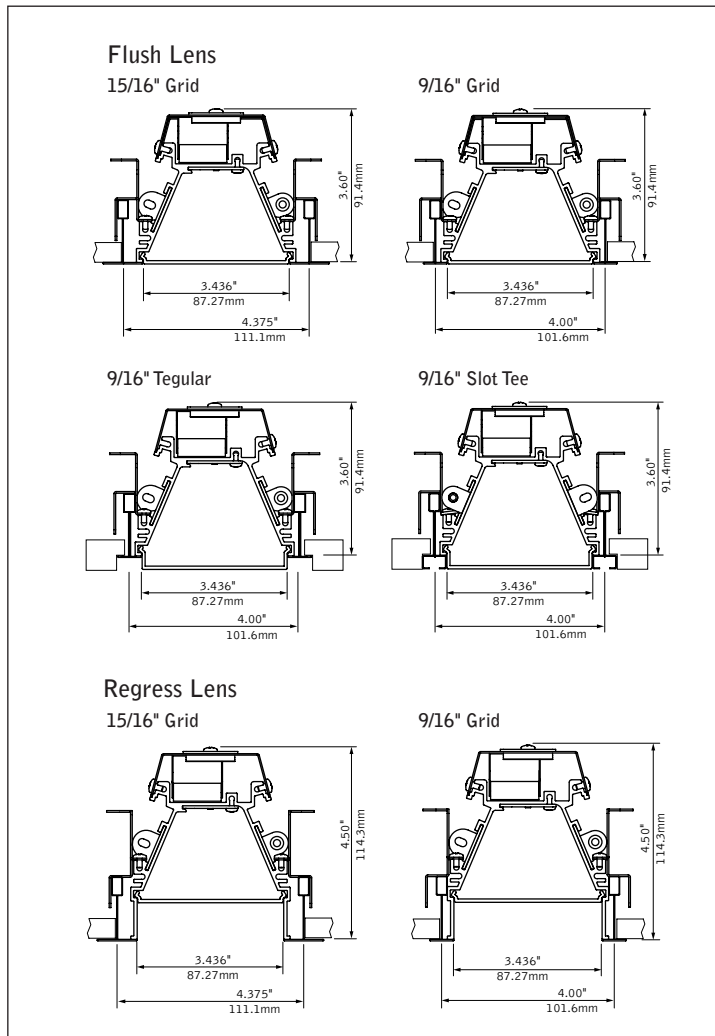

FEATURES

Low profile 3.6" housing depth on flush lens option and 4.5" housing depth on regress lens option.

Individual units or continuous runs in 6" increments.

Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.

LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Connected Solutions: Integrates with wired and wireless building lighting control systems.

Preferred Light: Lighting for better color rendition and human preference.

PERFORMANCE


4' Flush Lens
625 Lumens per foot
Delivered Lumens: 2500lm
Total System Watts: 24W

PRODUCT OVERVIEW

Lumen Output: 1100-4000lm
Wattage: 10-38W
LPW: 113-121
SDCM: 3

Photometric performance is measured in accordance with IESNA LM-79. Visit focalpointlights.com for complete photometric data. Visit designlights.org/QPL for model specifics.

DETAILS

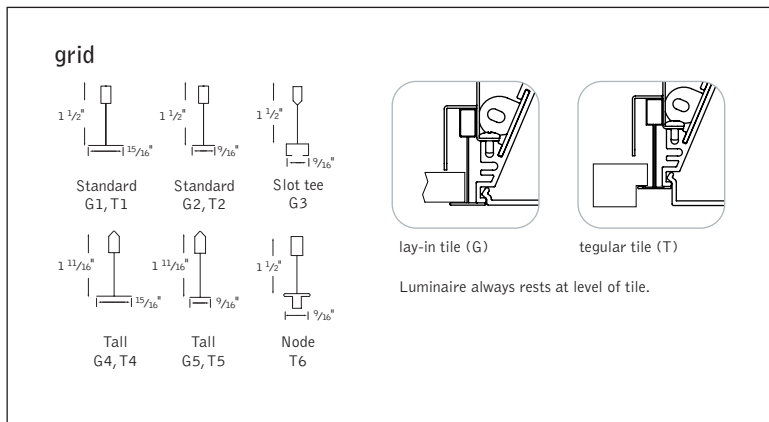

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3SDCM. LED modules are replaceable from below the ceiling. Drivers are accessible from above the ceiling only.

Construction

One piece extruded aluminum housing. 20 Ga. steel end caps. Aluminum driver compartment. 4' unit weight: 11 lbs., 8' unit weight: 19 lbs.

Optic

Extruded acrylic lens .078" thick with satin finish, up to 8' continuous.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Dimming range 100% to 10%. Power factor >.9.

Emergency Battery

Emergency output - 10 watts for 90 minutes. Maximum mounting height: 19.0ft. See EM/EC Guide for default locations and ordering details.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 > 61,000 hours Calculated: L70 at > 447,000 hours
 L90 > 61,000 hours L90 at > 110,000 hours
 (Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

4' PERFORMANCE CHART

Shielding	Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
Flush Lens	275LF	1100	10	113
	375LF	1500	14	117
	625LF	2500	24	121
	875LF	3500	34	119
	1000LF	4000	38	117

Based on 3500K, 80 CRI, 4' lengths. Lumen multipliers: Regress lens = 0.90, Preferred Light = 0.65, 90+ CRI = 0.87. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

ORDERING

Luminaire Series **FSM4LP**

Seem 4-LP **FSM4LP**

Shielding

Flush Satin Lens **FL**

Regress Lens **RL**

Lumen Output

275 Lumens per foot **275LF**

(2' LD1 & L11 only. 3' minimum all other drivers.)

375 Lumens per foot **375LF**

625 Lumens per foot **625LF**

875 Lumens per foot **875LF**

1000 Lumens per foot **1000LF**

Color Temperature

2700K, 80+ CRI or 90+ CRI **27K or 927K**

3000K, 80+ CRI or 90+ CRI **30K or 930K**

3500K, 80+ CRI or 90+ CRI **35K or 935K**

4000K, 80+ CRI or 90+ CRI **40K or 940K**

3500K, Preferred Light **P35K**

(Flush lens only)

Circuit

Single Circuit **1C**

Voltage

120/277 UNV Volt **UNV**

347 Volt **347**

(LD1 driver only)

Control System & Dimming Level

0-10V - 10% Dimming **LD1**

0-10V - 1% Dimming **L11**

Lutron Hi-Lume EcoSystem (LDE1) - **LH1**

Lutron 5-Series EcoSystem (LDE5) - **LU5**

5% Dimming

DALI 1% Dimming **D11**

Acuity nLight - 1% Dimming **NLT1**

(3' minimum length. Not available with CP.)

Enlighted Smart Sensor - 1% Dimming **ENL1**

(3' minimum length. Grid only.)

Osram Connected Lighting Module for ENCELIIUM systems - 1% Dimming **CLM1**

(3' minimum length. Increases height by 0.73" at module location. Compatible with Osram ENCELIIUM and ENCELIIUM EDGE systems only)

Osram Connected Lighting Module for ZigBee Wireless Networks - 1% Dimming **CLMZ1**

(3' minimum length. Increases height by 0.73" at module location. Not compatible with Osram ENCELIIUM systems)

Wattstopper DLM - 1% Dimming **DLM1**

(3' minimum length.)

Ceiling Configuration

Std. 15/16" Lay-in **G1**

Std. 15/16" Tegular **T1**

Std. 9/16" Lay-in **G2**

Std. 9/16" Tegular **T2**

9/16" Slot-tee Tegular **G3**

Tall 15/16" Lay-in **G4**

Tall 15/16" Tegular **T4**

Tall 9/16" Lay-in **G5**

Tall 9/16" Tegular **T5**

Node 9/16" Tegular **T6**

(For TechZone™ compatible luminaires see Seem 4-LP TechZone)

Factory Options

Chicago Plenum **CP**

Emergency Circuit **_EC**

(4' minimum, 7' minimum length for CLM1, CLMZ1, DLM1, ENL1 & NLT1.)

Emergency Battery Pack **_EM**

(4' minimum, 7' minimum length for CLM1, CLMZ1, DLM1, ENL1 & NLT1. Above ceiling access only. See EM/EC Guide for default locations and ordering details.)

6' New York City Flex Whip (120V) **FNY1**

6' New York City Flex Whip (277V) **FNY2**

6' Flex Whip **FW**

Finish

Matte White Housing **WH**

Luminaire Length

2' **2'**

2' 6" **2' 6"**

3' **3'**

4' **4'**

5' **5'**

6' **6'**

7' **7'**

7' 6" **7' 6"**

8' **8'**


Specify luminaire/row length in 6" increments **_ft. _in.**

(6' minimum row length)



Options in orange qualify for the Quickship program. 4', 8' and run length in 4' increments. 400' total. Refer to Quickship Guide for complete details including EM/EC options.



Focal Point provides flexibility in meeting the needs of each project by integrating with several building lighting control systems. A variety of sensors, drivers and other components can be specified that allow the luminaires to communicate with wired and wireless networks. All zoning can be digitally reconfigured through the application software. Daylight harvesting, occupancy sensing, integration with HVAC systems, and individual controls enable the monitoring and modulating of light levels and temperature in order to save energy, reduce costs and maximize occupants' comfort. All Connected Solutions luminaires require a compatible building control system.†




nLight® provides a two-way wired digital lighting system allowing for on/off and dimming functionality, occupancy sensing, and multi-zone daylight harvesting.

Acuity nLight - 1% Dimming (NLT1)
Acuity Model #nEPS-60-IO

CAT-5 Cable provided by others. Serial labels will be provided on outside of luminaires and control unit.



Flush Lens




Regress Lens



Enlighted smart sensor allows for occupancy sensing, daylight harvesting, energy usage, temperature and light level control. Communicates wirelessly with the Enlighted network.


Enlighted Smart Sensor - 1% Dimming (ENL1)
Enlighted Model #SU-5E-IOT



Connected Lighting Module (CLM) enables each luminaire to be independently controlled and configured. Communicates wirelessly with Daintree Networks®, Osram ENCELIUM®, Osram ENCELIUM EDGE™, and other networks using the ZigBee® HA communication protocol to allow for on/off and dimming functionality, occupancy sensing and multi-zone daylight harvesting.

Osram CLM - 1% Dimming (CLM1 & CLMZ1)
Osram Model #ZBHA-CLM DIM



Serial labels will be provided on outside of luminaires and control unit.



A Digital Lighting Management (DLM) system that provides two-way wired communication between networked luminaires and control system to allow for on/off and dimming functionality, occupancy sensing and multi-zone daylight harvesting.


Wattstopper DLM - 1% Dimming (DLM1)
Wattstopper Model #LMFC-011

CAT-5 Cable provided by others. Serial labels will be provided on outside of luminaires and control unit.



A two-way digital network that enables on/off and dimming functionality, occupancy sensing, and multi-zone daylight harvesting working with Quantum®, Energi Savr Node™, and Energi TriPak® using EcoSystem® communication protocol.

Lutron Hi-Lume EcoSystem - 1% Dimming (LH1)
Lutron Model #LDE1
Lutron 5-Series EcoSystem - 5% Dimming (LU5)
Lutron Model #LDE5



A two-way digital network that enables on/off and dimming functionality, occupancy sensing, and multi-zone daylight harvesting. Communicates with Züm wireless and SpaceBuilder working with Züm hub scheduling or FUSION management.

DALI - 1% Dimming (D11)
0-10V - 1% Dimming (L11)

Note: 0-10V is not a digital network but is compatible with Creston Züm™ system.

CONNECTED SOLUTIONS DETAILS

Connected Solution	Model #	Protocol	Compatible Networks*	Occupancy	Daylight	Temperature Reporting	Communication to Luminaire	Drivers
Acuity nLight (NLT1)	nEPS-60-IO**	nLight	nLight	Enabled	Enabled	No	Wired	eldoLED ECOdrive , eldoLED SOLOdrive
Creston (D11, L11)	Specified Driver	DALI 0-10V	Creston Züm Wireless & SpaceBuilder	Enabled	Enabled	No	Wired	eldoLED ECOdrive (DALI) , Philips Xitanium (0-10V)
Enlighted Smart Sensor (ENL1)	SU-5E-IOT**	Enlighted RF	Enlighted	Integrated	Integrated	Yes	Wireless	Philips SimpleSet , Osram Optotronic
Legrand Wattstopper DLM (DLM1)	LMFC-011**	DLM	DLM	Enabled	Enabled	No	Wired	Philips SimpleSet , Osram Optotronic
Lutron EcoSystem (LH1 & LU5)	LDE1;** LDE5**	EcoSystem	Quantum, Energi Savr Node, Energi TriPak	Enabled	Enabled	No	Wired	Lutron Hi-Lume Lutron 5-Series
Osram CLM for ENCELIUM systems (CLM1)	ZBHA-CLM**	ZigBee HA	Osram ENCELIUM & ENCELIUM EDGE	Enabled	Enabled	No	Wireless	Osram Optotronic
Osram CLM for ZigBee Wireless Networks (CLMZ1)	ZBHA-CLM**	ZigBee HA	Daintree Networks & open ZigBee Networks	Enabled	Enabled	No	Wireless	Osram Optotronic

*Not all compatible networks may be listed. **For performance data and additional control system details please visit the connected solutions manufacturer websites. Primary drivers are listed in bold. To specify a particular driver please consult factory. †Controls systems supplied by others.